



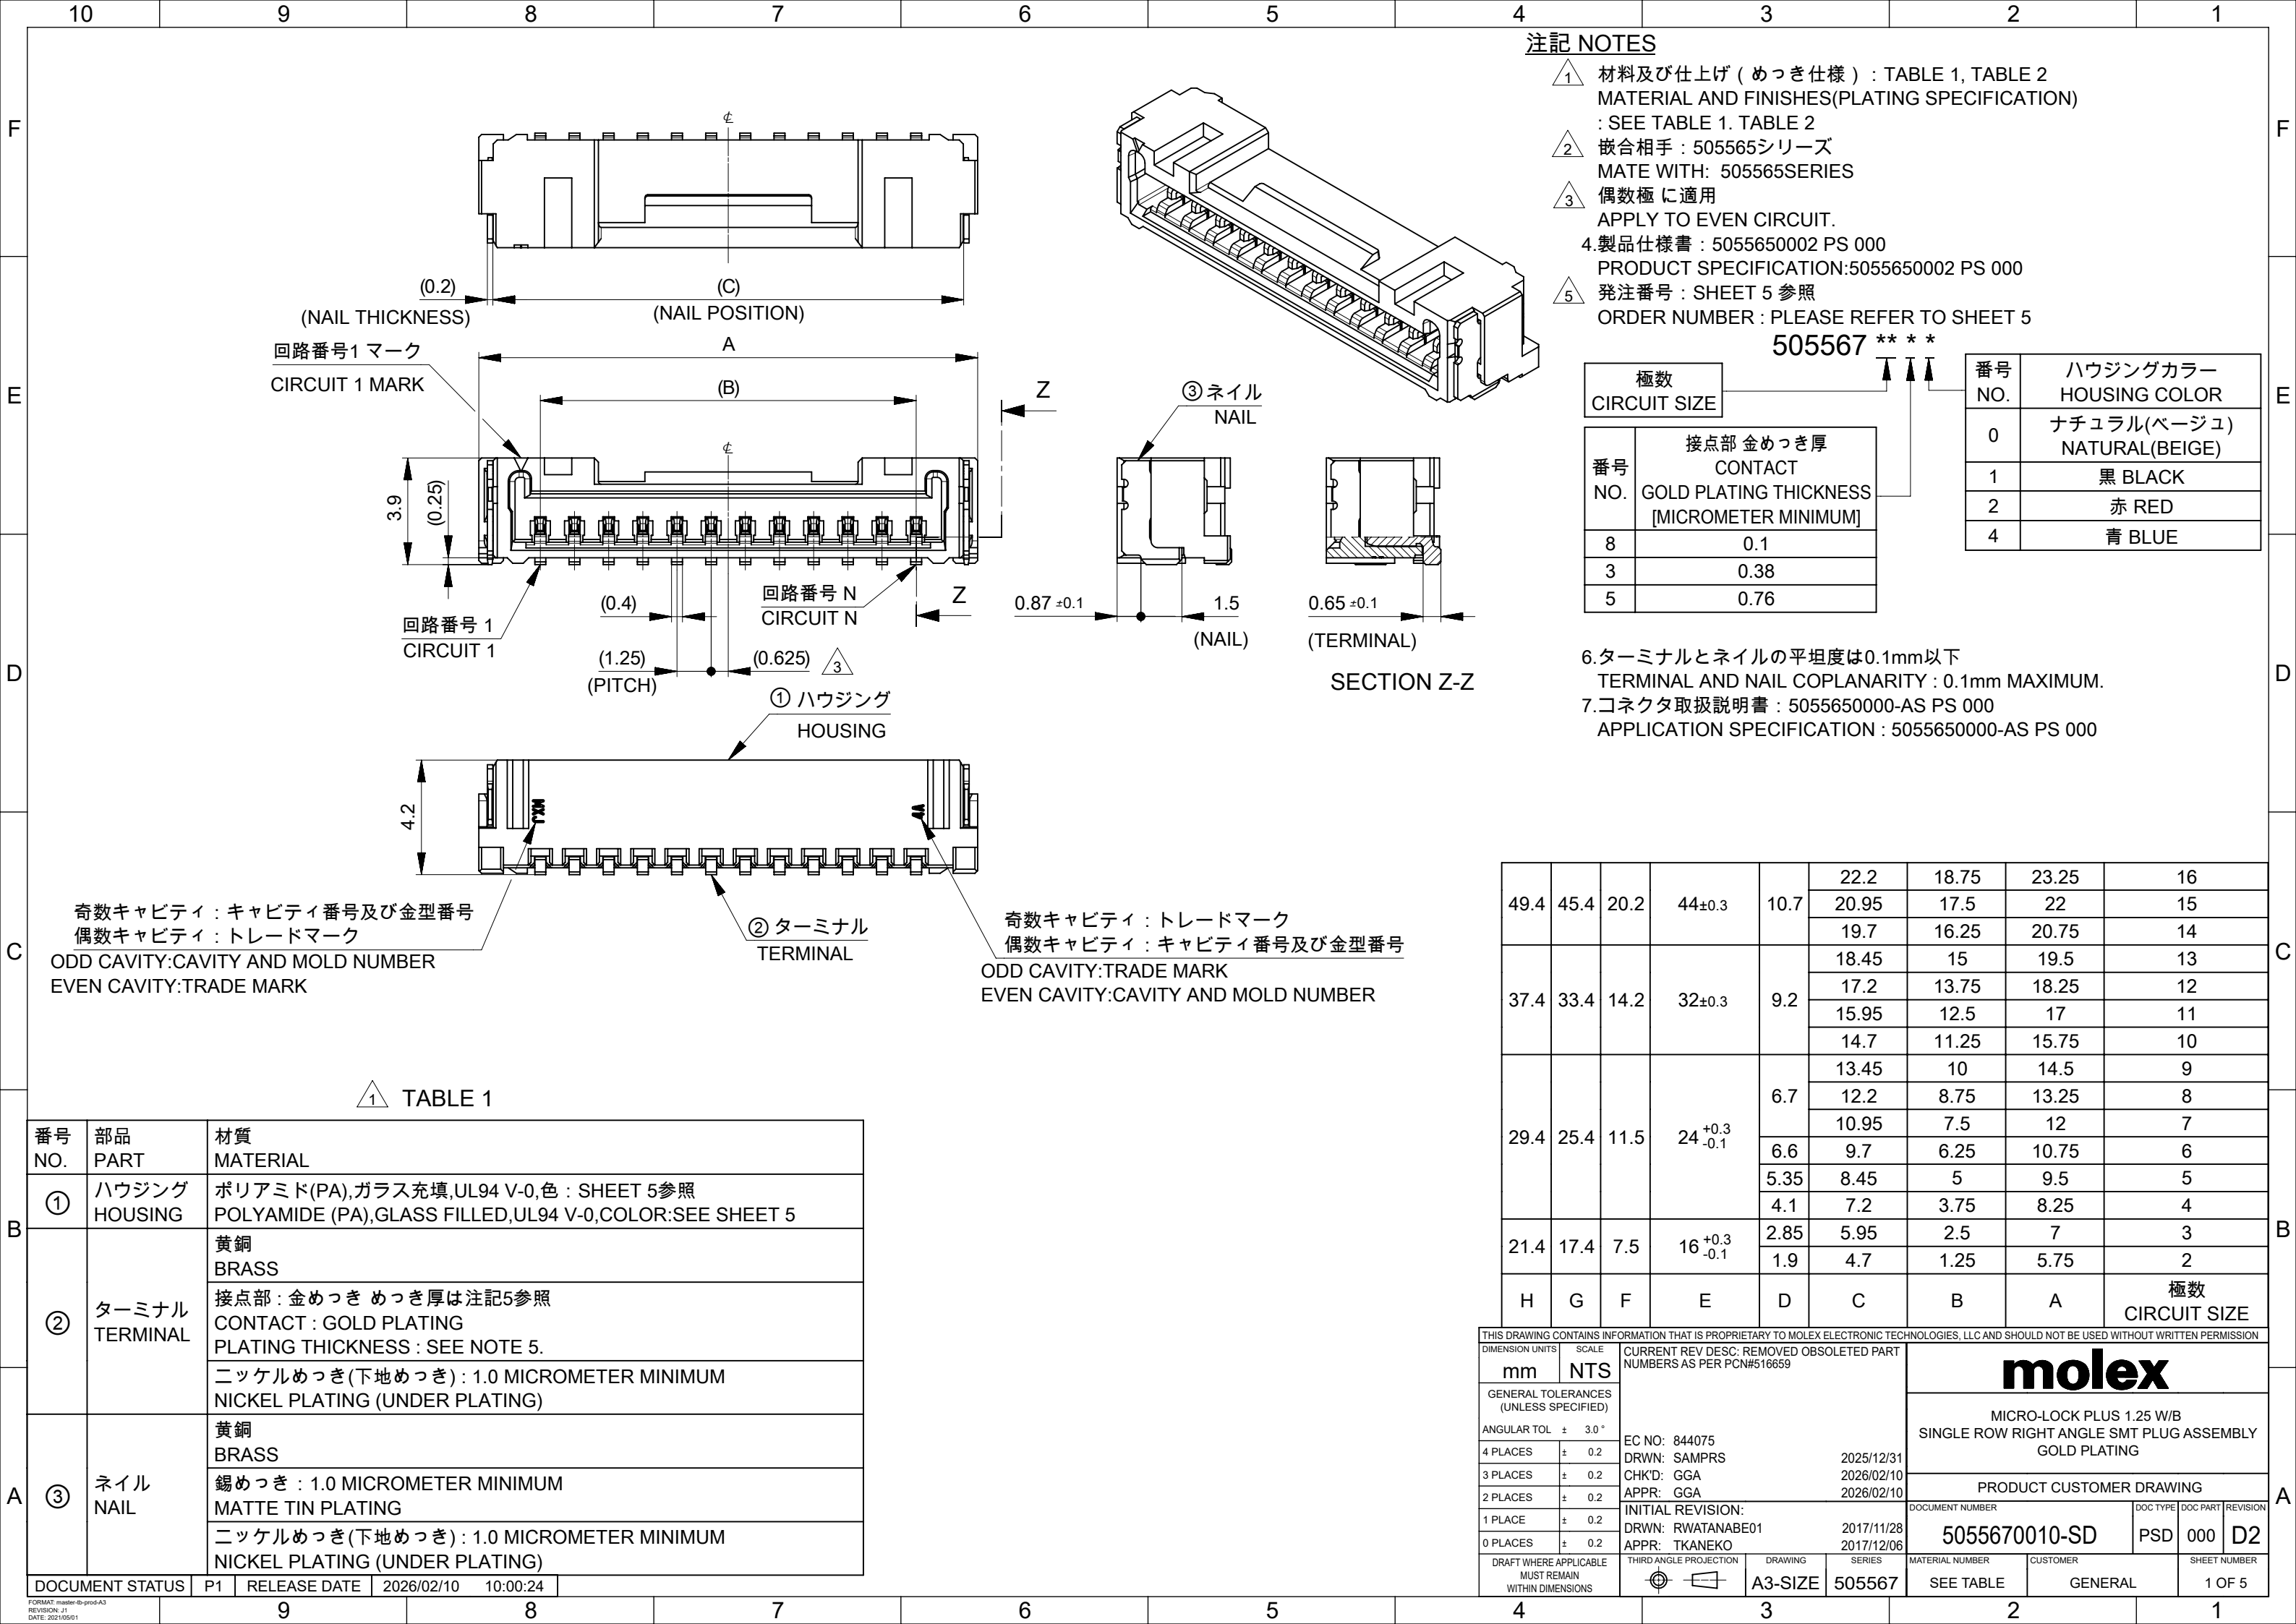


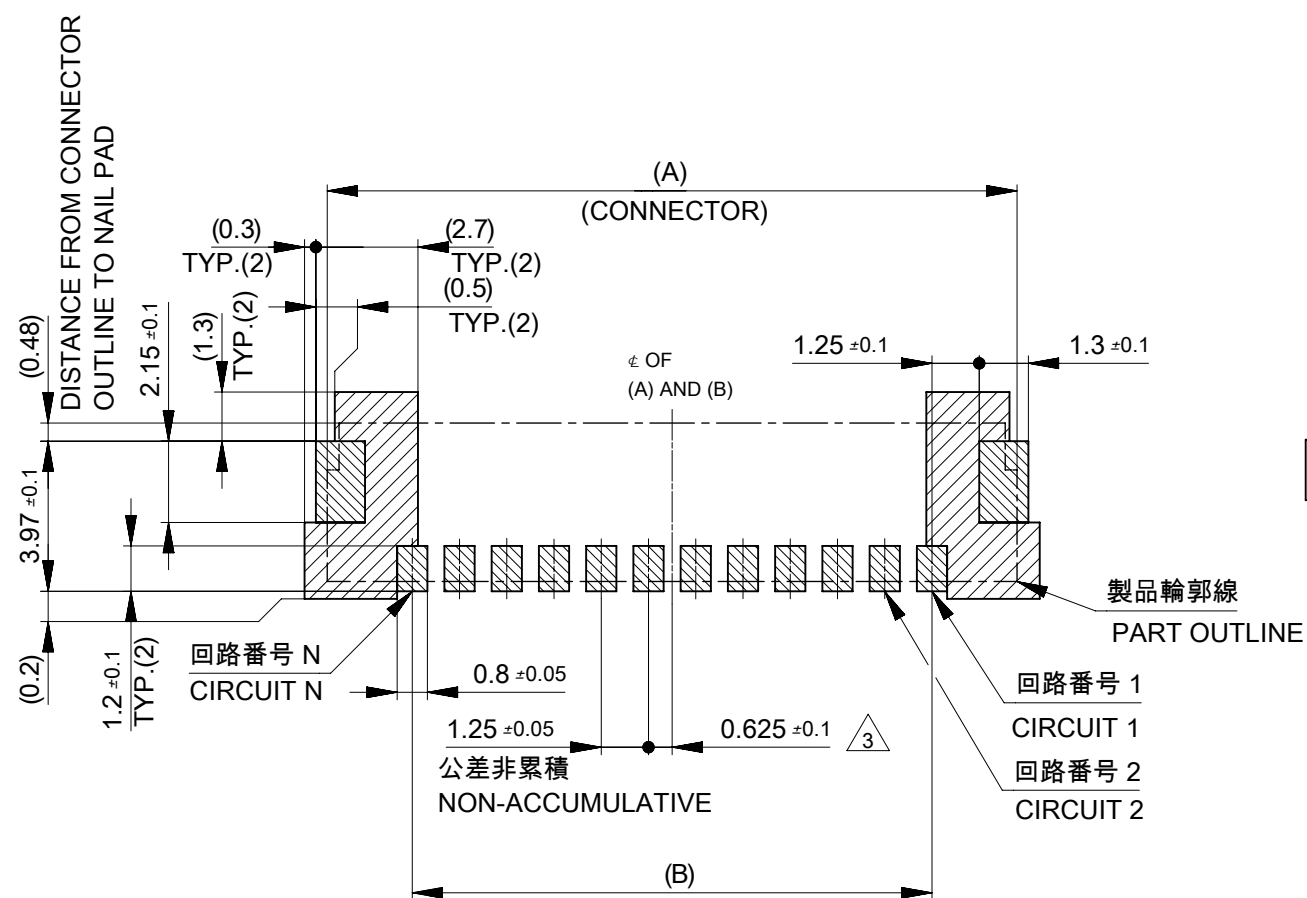



 推奨基板レイアウト
RECOMMENDED PCB PATTERN LAYOUT

(参考：基板厚1.6mm，メタルマスク厚さ 0.15mm，マスク開口率 100%)
(REFERENCE: PCB THICKNESS 1.6mm, STENCIL THICKNESS 0.15mm, APERTURE RATIO 100%)


 **パターン非推奨エリア**
パターンを引き回す際は、製品機能に影響がないことをご確認ください。
PATTERN IS NOT RECOMMENDED ON THE HATCHING AREA
PLEASE CHECK NOT TO HAVE PROBLEM FOR PRODUCT FUNCTION
WHEN SETTING PATTERN ON THE HATCHING AREA.

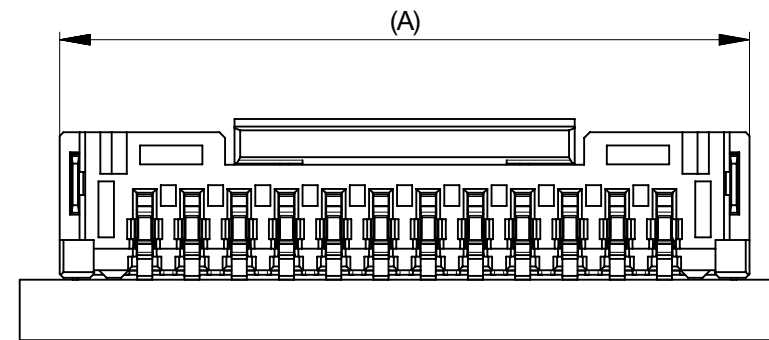


嵌合状態図
MATED CONNECTORS

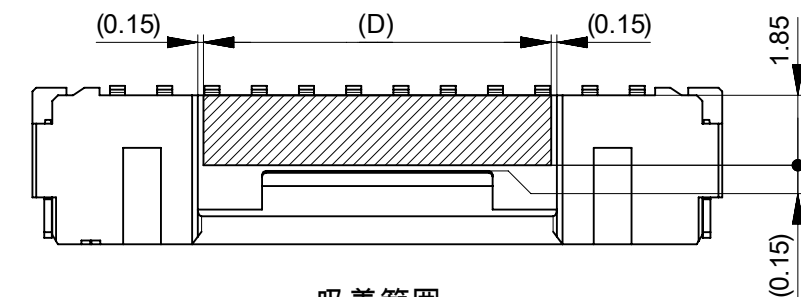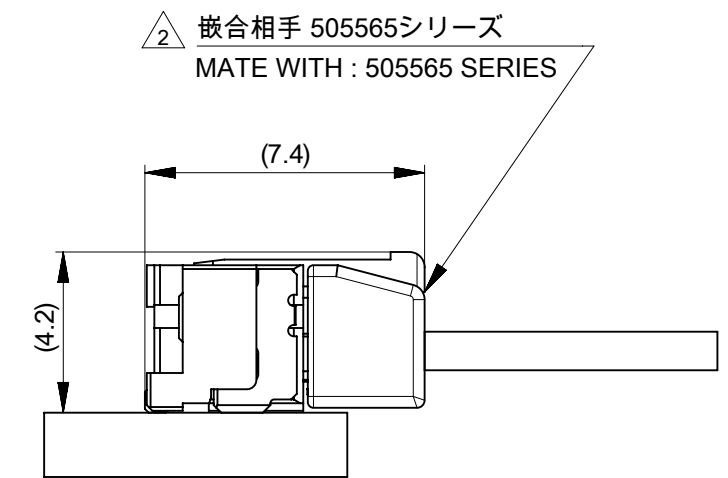


吸着範囲
SUCTION AREA

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
DIMENSION UNITS		SCALE		CURRENT REV DESC: REMOVED OBSOLETE PART NUMBERS AS PER PCN#516659				molex			
mm		NTS									
GENERAL TOLERANCES (UNLESS SPECIFIED)											
ANGULAR TOL ± 3.0°								MICRO-LOCK PLUS 1.25 W/B SINGLE ROW RIGHT ANGLE SMT PLUG ASSEMBLY GOLD PLATING			
4 PLACES		± 0.2									
3 PLACES		± 0.2									
2 PLACES		± 0.2		APPR: GGA				2026/02/10			
1 PLACES		± 0.2		INITIAL REVISION:				DOCUMENT NUMBER			
0 PLACES		± 0.2		APPR: TKANEKO				2027/11/28			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER	
						A3-SIZE		505567		SEE TABLE	
										CUSTOMER	
								SHEET NUMBER			
								GENERAL			
								2 OF 5			


製品形状
PRODUCT SHAPE

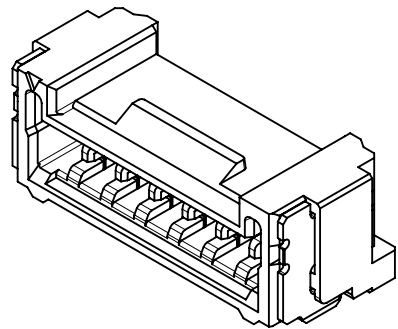


2-11極
2-11 CIRCUIT

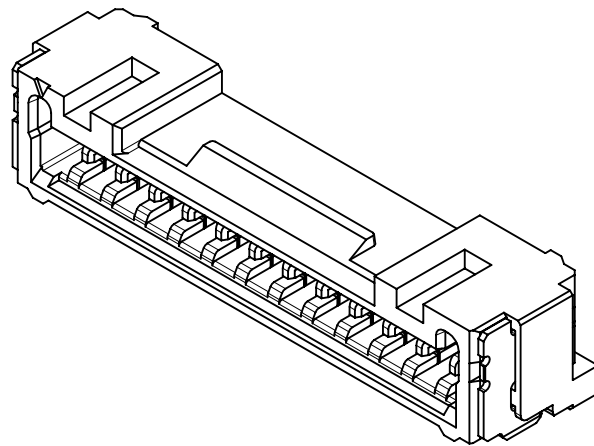

12-13極
12-13 CIRCUIT

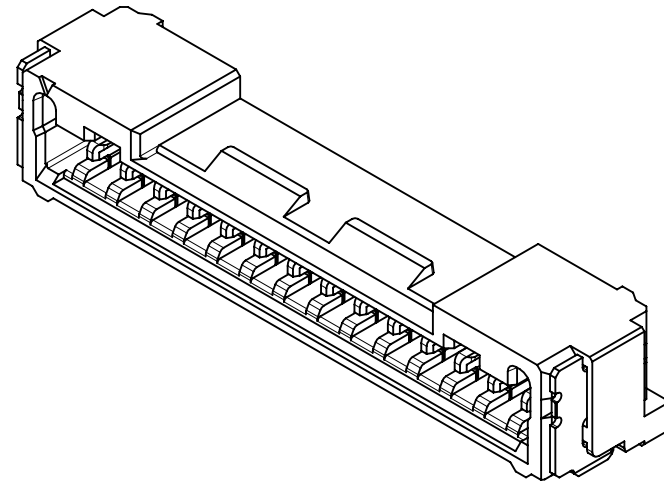


14極
14 CIRCUIT

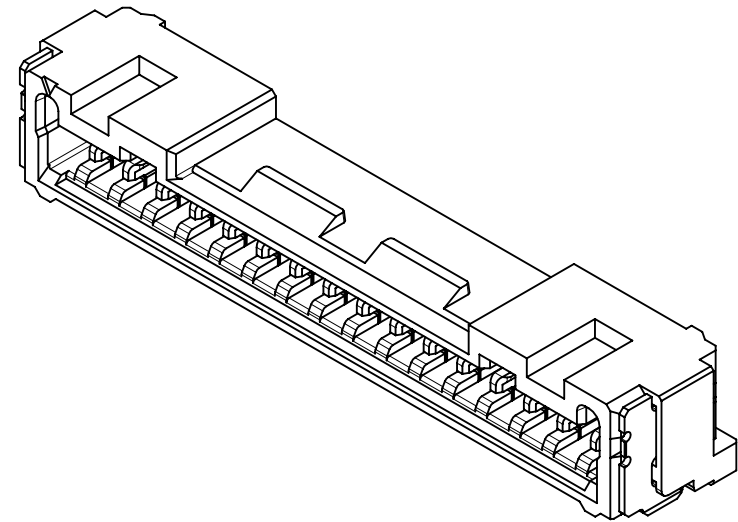

15-16極
15-16 CIRCUIT

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
DIMENSION UNITS		SCALE		CURRENT REV DESC: REMOVED OBSOLETE PART NUMBERS AS PER PCN#516659				molex MICRO-LOCK PLUS 1.25 W/B SINGLE ROW RIGHT ANGLE SMT PLUG ASSEMBLY GOLD PLATING PRODUCT CUSTOMER DRAWING							
mm		NTS													
GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 844075 DRWN: SAMPRS2025/12/31 CHK'D: GGA2026/02/10 APPR: GGA2026/02/10 INITIAL REVISION: DRWN: RWATANABE012017/11/28 APPR: TKANEKO2017/12/06											
ANGULAR TOL		± 3.0 °													
4 PLACES		± 0.2													
3 PLACES		± 0.2													
2 PLACES		± 0.2													
1 PLACE		± 0.2		DOCUMENT NUMBER5055670010-SDDOC TYPEPSDDOC PART000REVISIOND2											
0 PLACES		± 0.2													
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION 		DRAWING A3-SIZE		SERIES 505567		MATERIAL NUMBER SEE TABLE		CUSTOMER GENERAL		SHEET NUMBER 3 OF 5	

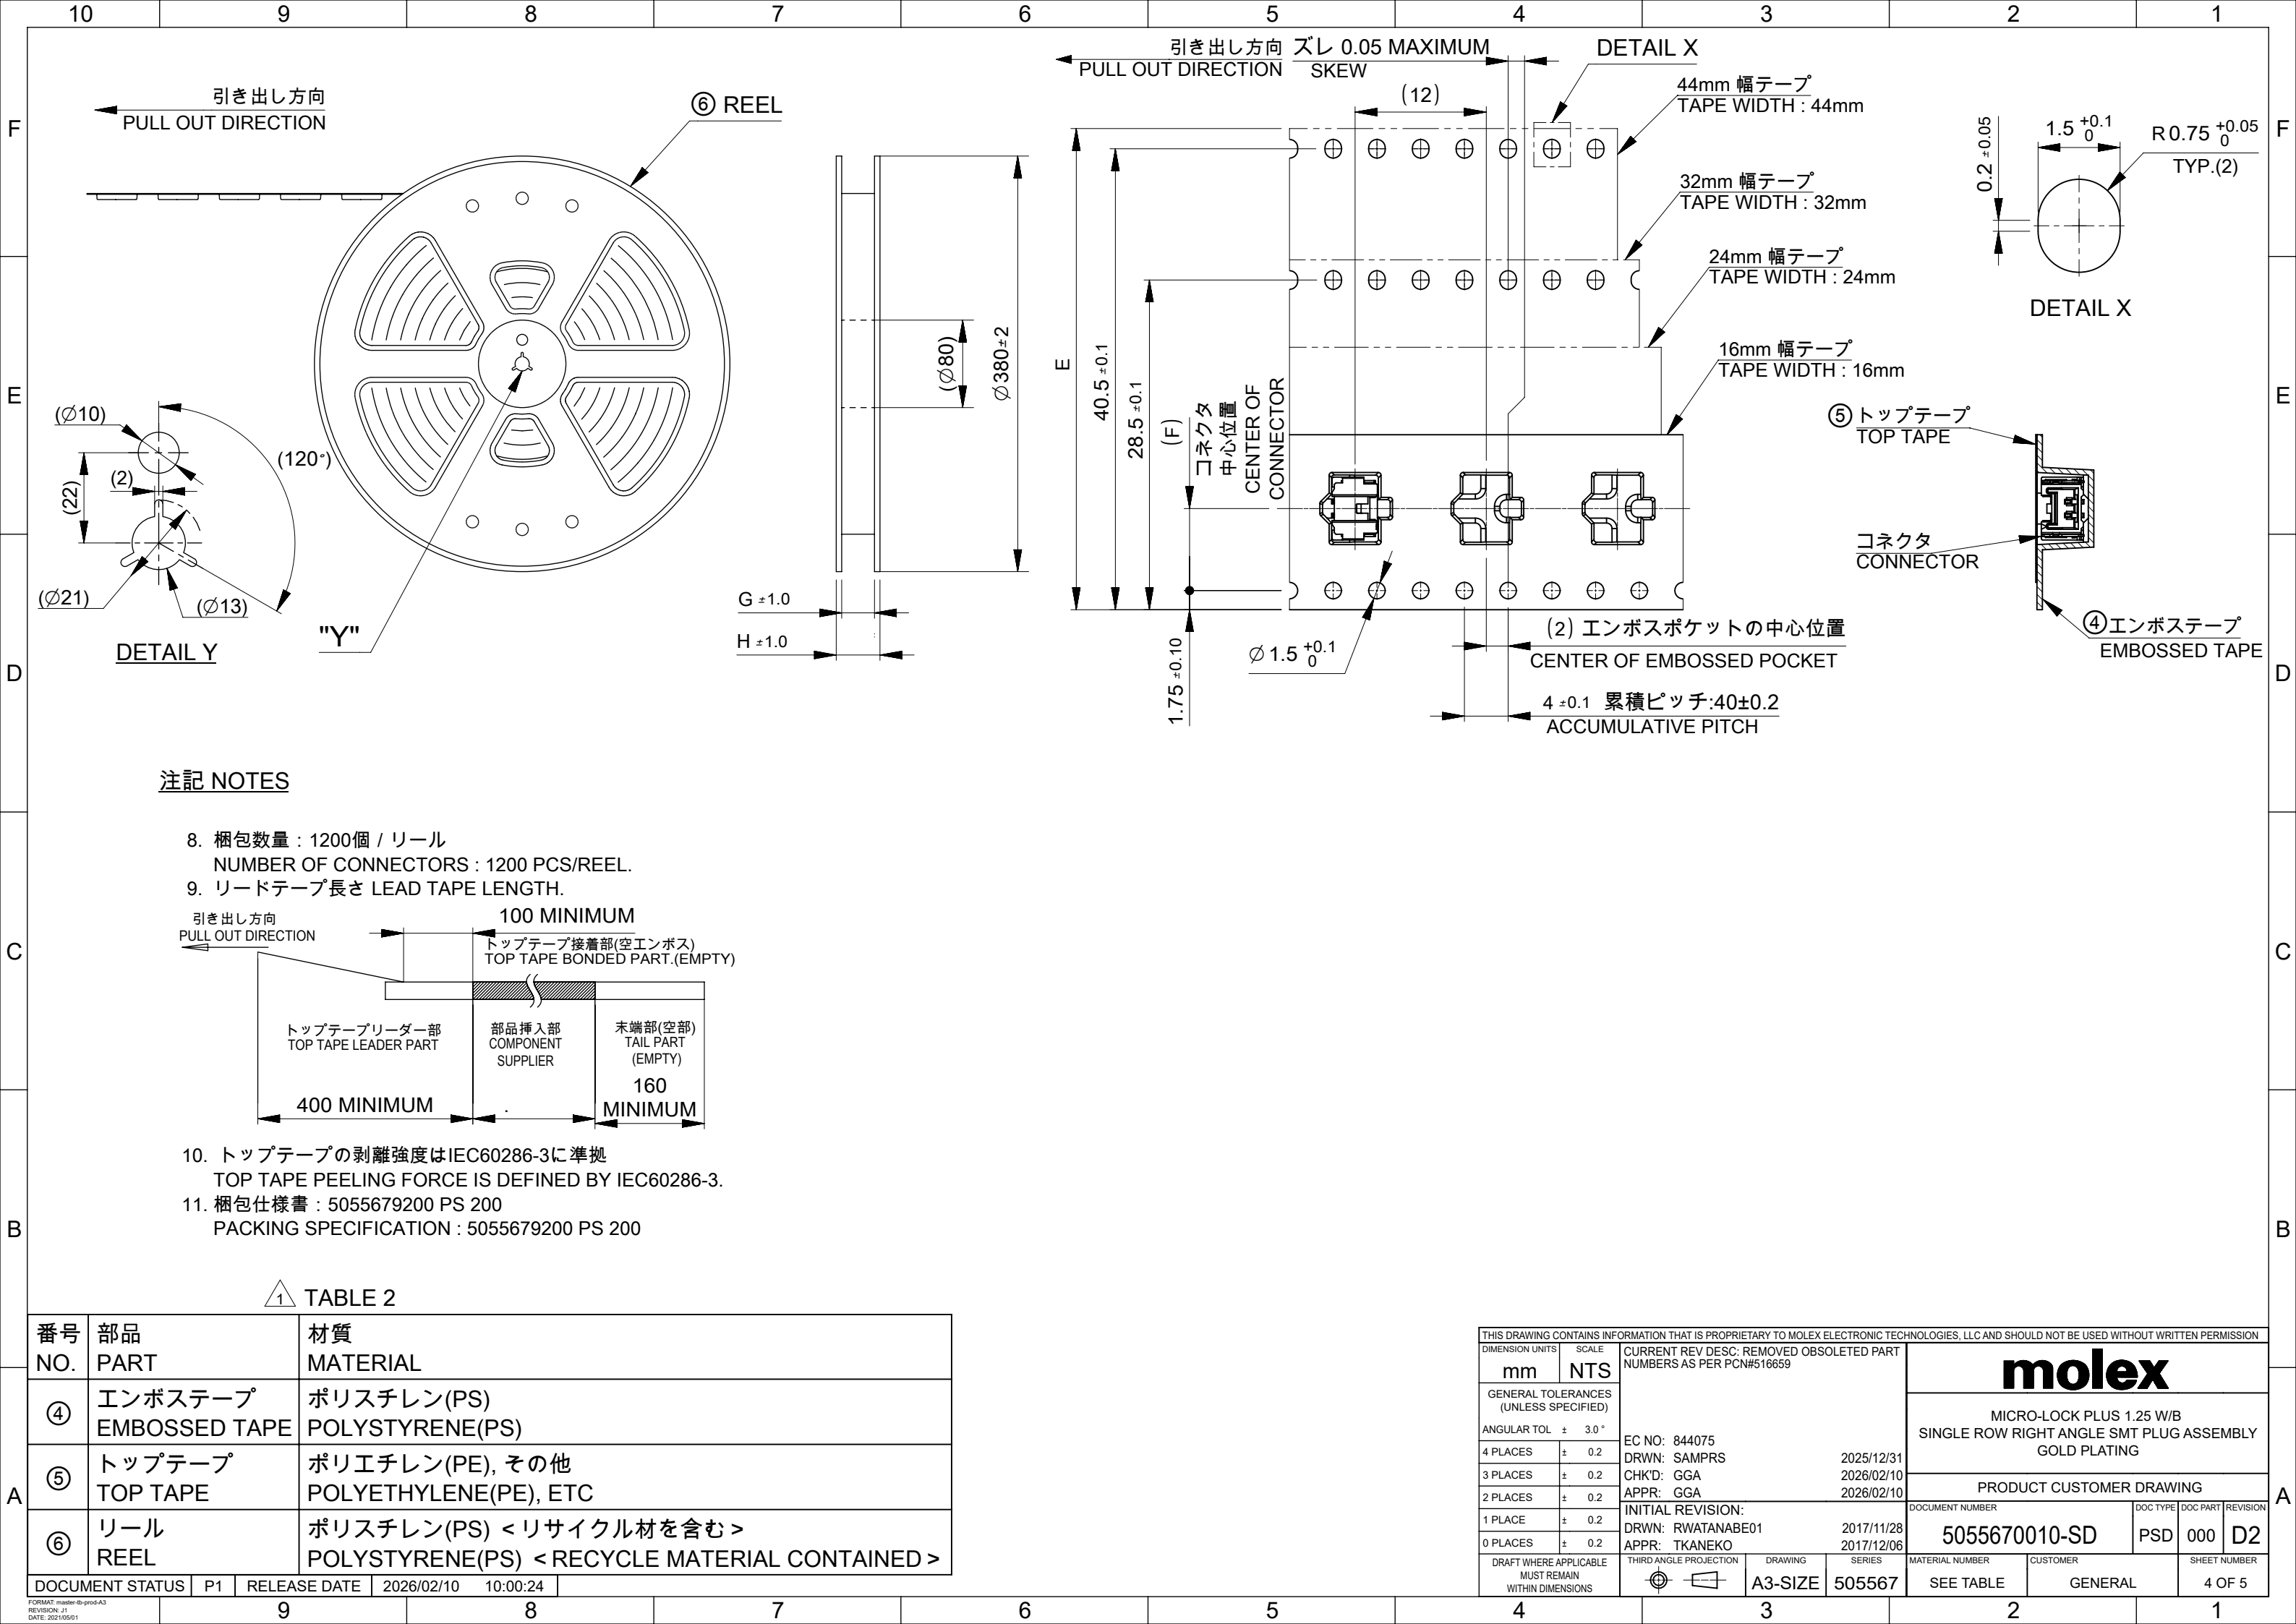

注記 NOTES

8. 梱包数量 : 1200個 / リール
NUMBER OF CONNECTORS : 1200 PCS/REEL.
9. リードテープ長さ LEAD TAPE LENGTH.
10. トップテープの剥離強度はIEC60286-3に準拠
TOP TAPE PEELING FORCE IS DEFINED BY IEC60286-3.
11. 梱包仕様書 : 5055679200 PS 200
PACKING SPECIFICATION : 5055679200 PS 200

TABLE 2

番号 NO.	部品 PART	材質 MATERIAL
④	エンボステープ EMBOSSSED TAPE	ポリスチレン(PS) POLYSTYRENE(PS)
⑤	トップテープ TOP TAPE	ポリエチレン(PE), その他 POLYETHYLENE(PE), ETC
⑥	リール REEL	ポリスチレン(PS) <リサイクル材を含む> POLYSTYRENE(PS) < RECYCLE MATERIAL CONTAINED >

DOCUMENT STATUS	P1	RELEASE DATE	2026/02/10	10:00:24
-----------------	----	--------------	------------	----------

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DIMENSION UNITS		SCALE		CURRENT REV DESC: REMOVED OBSOLETE PART NUMBERS AS PER PCN#516659			molex		
mm		NTS							
GENERAL TOLERANCES (UNLESS SPECIFIED)				MICRO-LOCK PLUS 1.25 W/B SINGLE ROW RIGHT ANGLE SMT PLUG ASSEMBLY GOLD PLATING					
ANGULAR TOL ± 3.0 °									
4 PLACES		± 0.2		EC NO: 844075			PRODUCT CUSTOMER DRAWING		
3 PLACES		± 0.2		DRWN: SAMPRS					

