

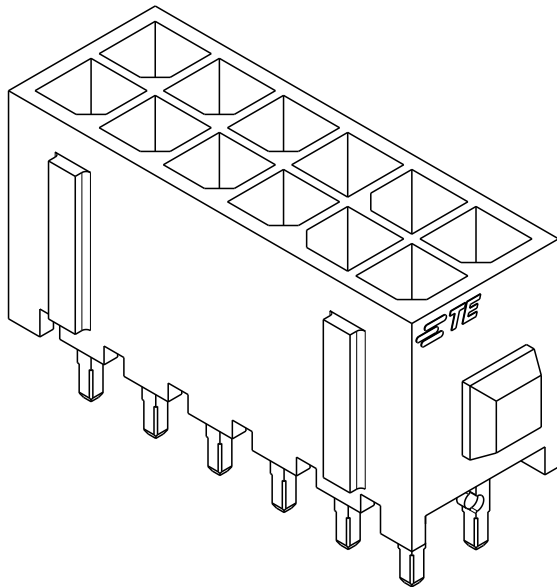


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	00		B	REVISED PER ECO-15-005485	28JULY2015	SC	DZ
			B1	ECO-19-006934	13MAY2019	AP	WS
			B2	REVISED PER ECN-20-100750	10DEC2020	WLS	VS
			B3	REVISED PER ECN-26-365947	27JAN2026	WLS	JP

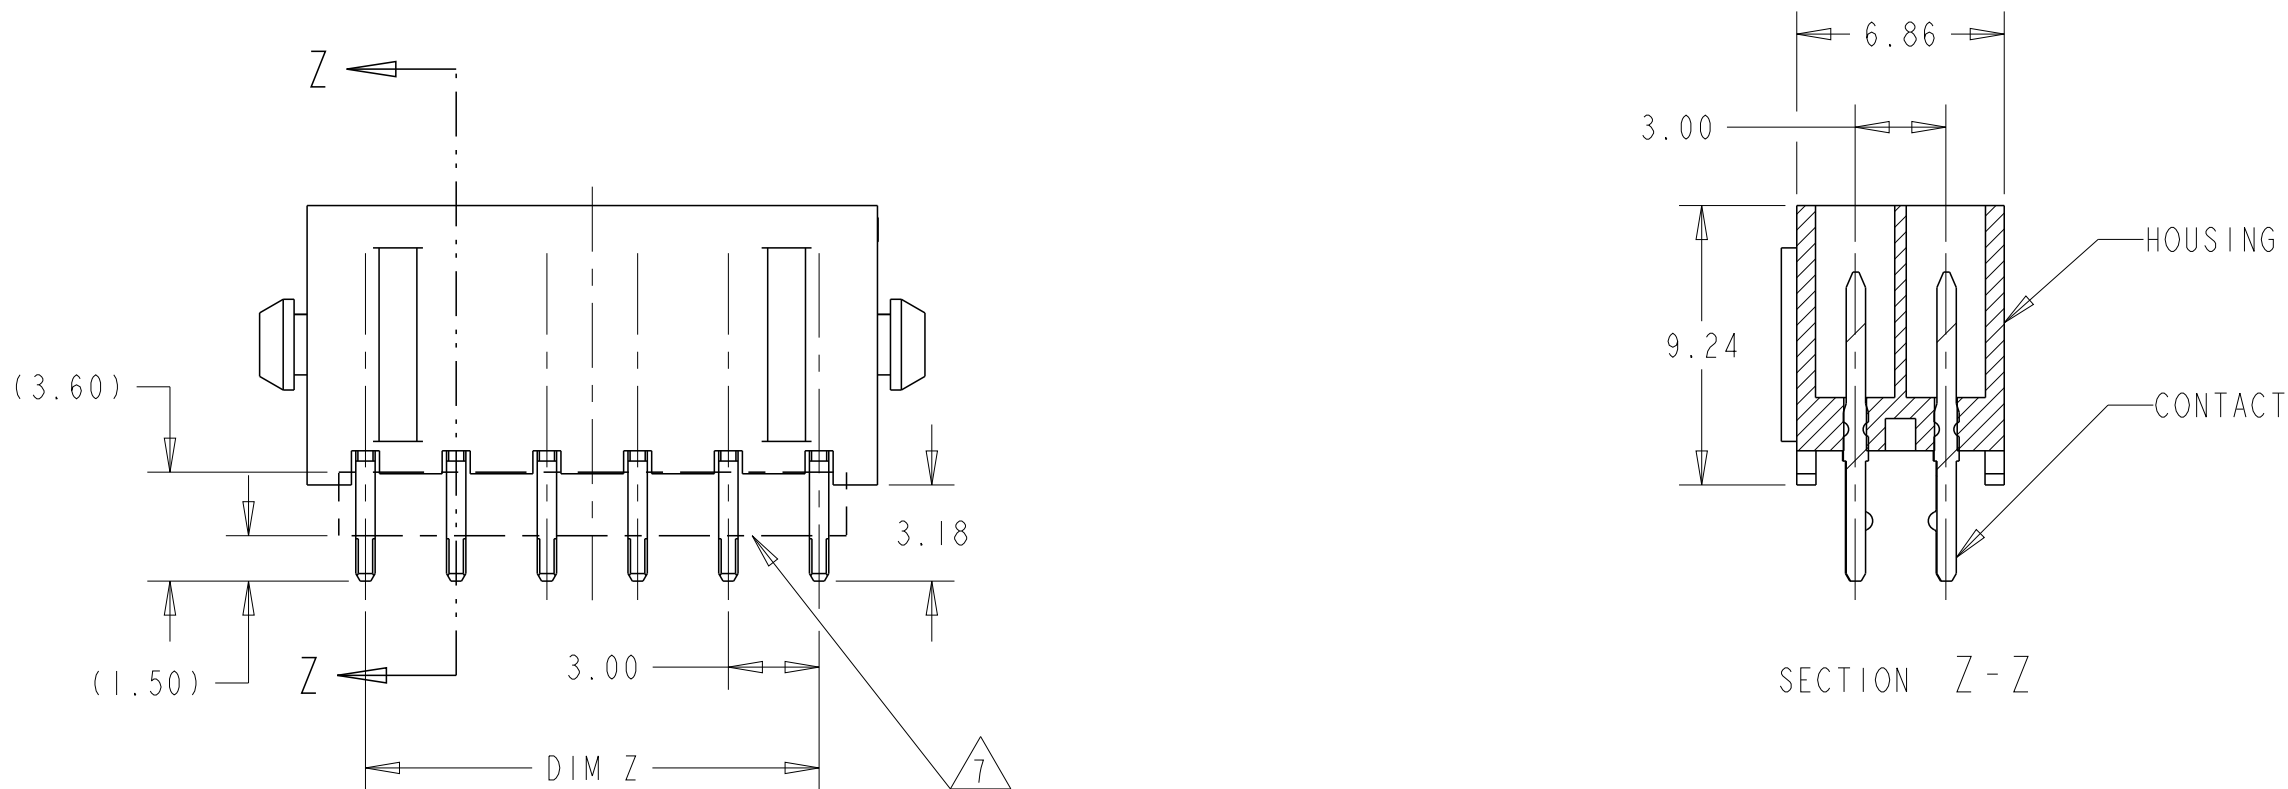

- 1 MATERIAL: HOUSING - UL 94V-0 RATED HIGH TEMP., NYLON, COLOR BLACK.
CONTACT - BRASS.
- 2 MAXIMUM INSERTION 30 LBS.
- 3 RECOMMENDED BOARD THICKNESS 1.57.
- 4 FINISHING: CONTACT - 2.54µm MINIMUM TIN OVER 1.27µm MINIMUM NICKEL.
- 5 COUNTERPART RECOMMENDED IS PN 794617 (DASH ACCORDING TO NUMBER OF POSITION).
- 6 FOR REELING DIRECTION AND PACKAGING TYPE, SEE SPECIFICATION 114-13000.
- 7 CUTTING AREA REGION, NO PLATING IS PRESENT.

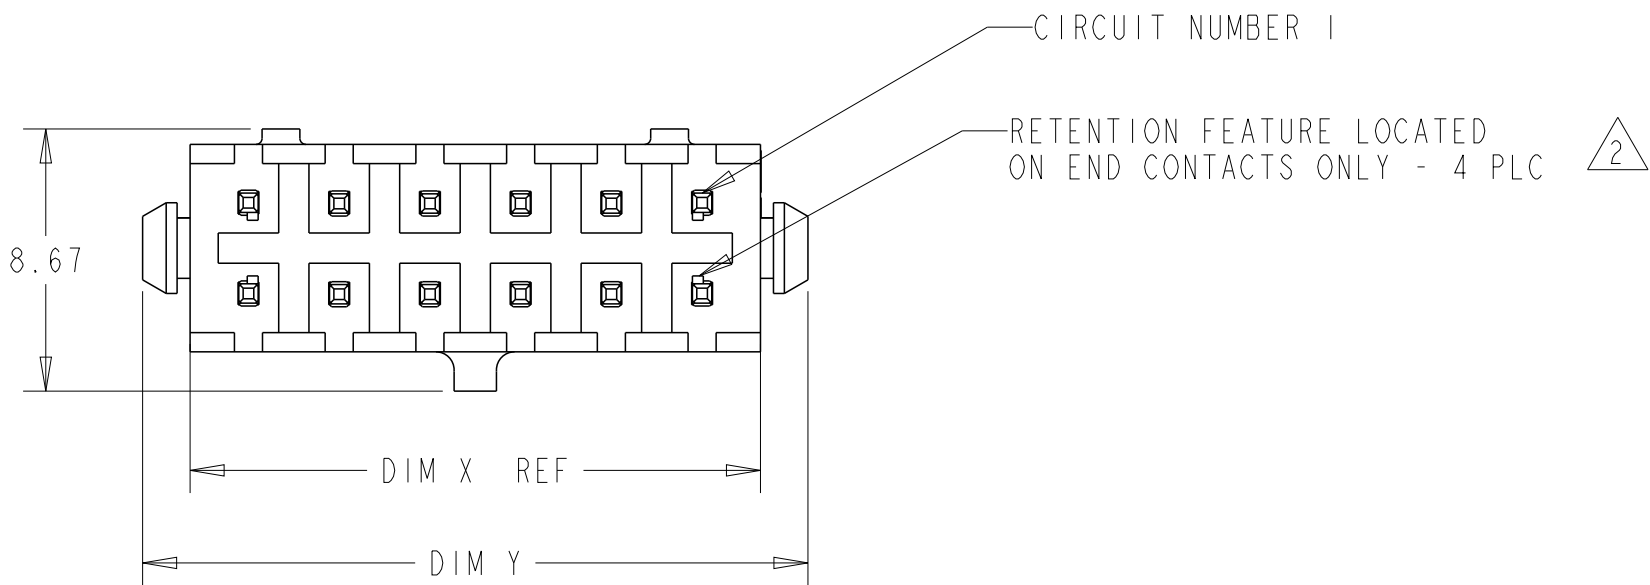

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN RAGHAVENDRA CHK M. SARVER APVD M. SARVER	05APR2010 05APR2010 05APR2010	22.00		15.00	18.86	12	2029304-1
DIMENSIONS: mm[INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DIM Y		DIM Z	DIM X	NO. OF POSN.	ASSEMBLY
		0 PLC ± 1 PLC ± 2 PLC ±0.20[.008] 3 PLC ± 4 PLC ± ANGLES ±1° FINISH		PRODUCT SPEC 108-1836 APPLICATION SPEC 114-13000 WEIGHT -		NAME VERTICAL HEADER ASSEMBLY, THRU HOLE, TIN, DUAL ROW, MICRO MATE-N-LOK(TM)		SIZE A2	CAGE CODE 00779
MATERIAL				DRAWING NO C-2029304		RESTRICTED TO -		SCALE 4:1	
CUSTOMER DRAWING				SHEET 1 OF 2		REV B3			

