

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
IR	-		Y	ADDED 4-215875-1	13JUN2019	IT	SH
			Y1	ADDED REEL PACKAGING	28JUL2024	RK	PSS
			Y2	REACTIVATED P/N 1-215875-3	12AUG2024	RK	RCG
			Y3	REVISED PER ECN-25-333772	21JUL2025	TR	RK

D

D

C


C

B

B






A

A

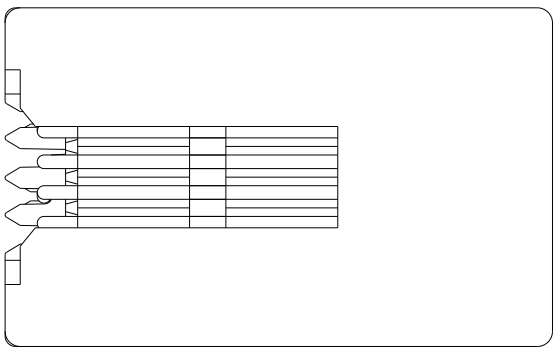


NOTES:

1. TOLERANCE UNLESS OTHERWISE SPECIFIED: 0,15.
- 2 BULK PACKAGING: TRUE POSITIONING OF THE SOLDER TINES IS NOT GUARANTEED.
- 3 SUPERSEDED BY 1-215876-3
- 4 SUPERSEDED BY 215875-1
- 5 OBSOLETE 3-215875-3

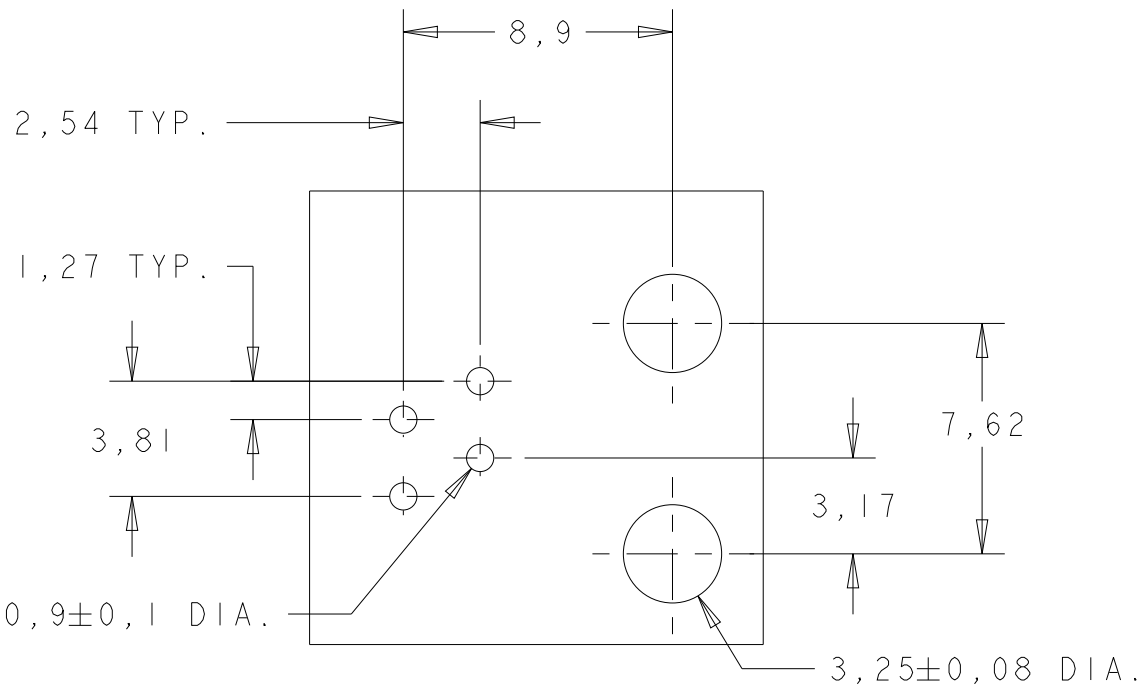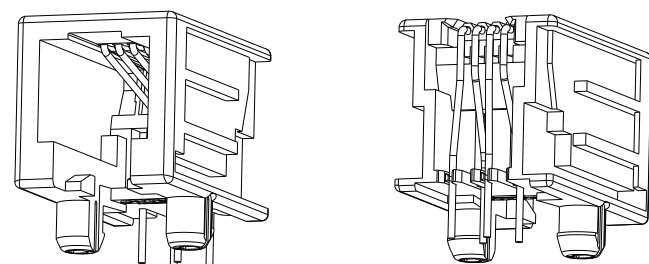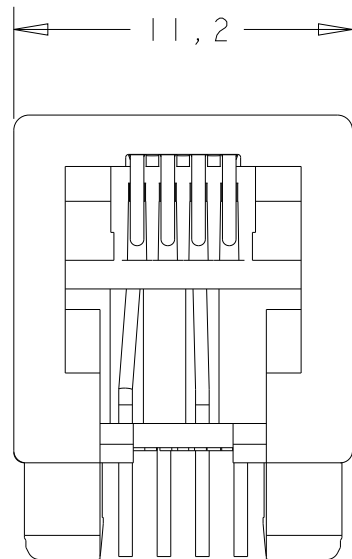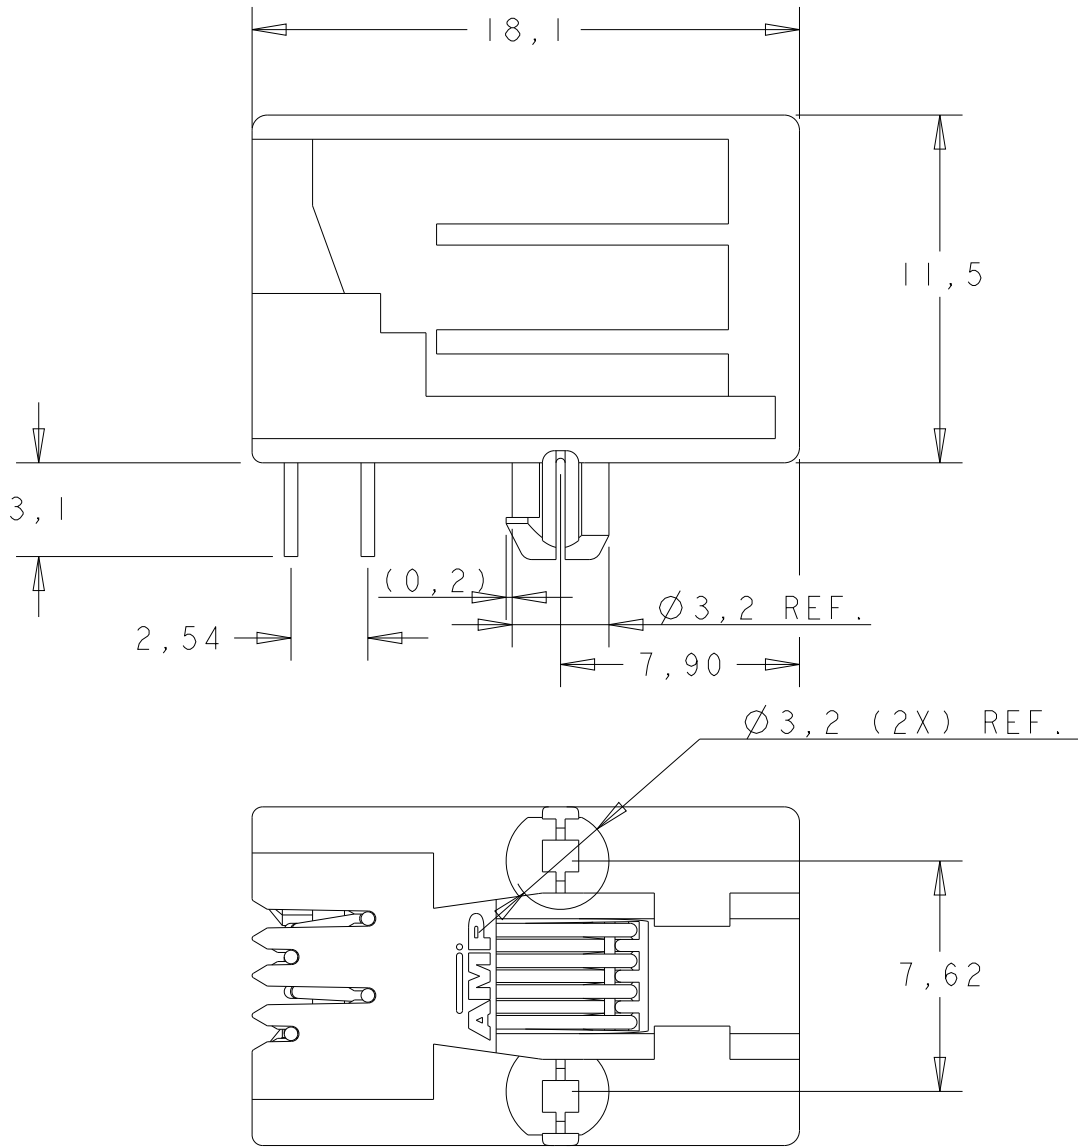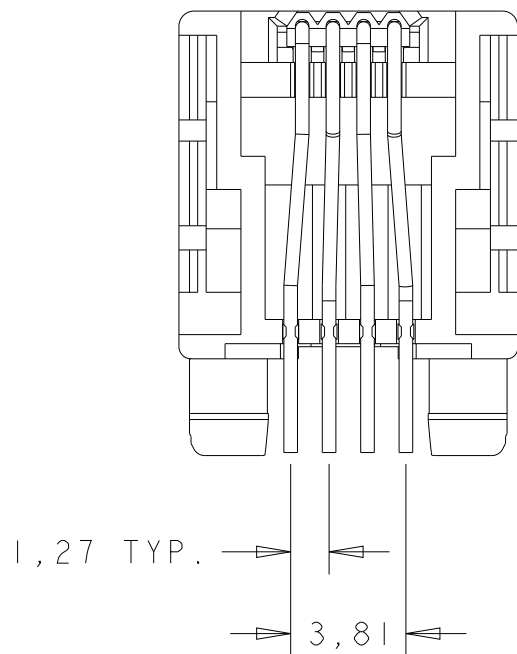

OBSOLETE

OVERALL: Ni 1.27µm MIN. ALL OVER THE CONTACTS SOLDER ZONE: Sn 2.5µm MIN. ON THE SOLDER ZONE OF THE CONTACT MATING ZONE: PLATING CONFIRMS TO PRODUCT REQUIREMENTS AS PER SPECIFICATION 108-19064		HOUSING, COLOR BLACK: PBT 20% GF, UL 94V-0 CONTACT INSERT: PBT, UL 94V-0 CONTACTS: PH, BRONZE	100 PCS IN A TRAY TRAY SIZE 300*150 ESD TYPE TRAY	4-215875-1		
			290 PCS IN A TRAY	1-215875-3		
			50 PCS IN A TUBE (SEE SHEET 2)	△5 3-215875-3		
			BULK PACKAGED IN A BOX	△4 2-215875-1		
			126 PIECES IN MULTI TUBE	△3 1-215875-1		
			TAPE MOUNTED 1000pcs./reel	215875-1		
FINISH		MATERIAL	PACKAGING	PARTNUMBER		
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN E.v.EIJK CHK M.v.ESSSEN APVD R.SMEETS PRODUCT SPEC 108-19064 APPLICATION SPEC 114-19019 WEIGHT -	STE TE Connectivity NAME MODULAR JACK SIDE ENTRY 4/4 FOR PRINTED CIRCUIT BOARD -			
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±1 1 PLC ±0.1 2 PLC ±0.05 3 PLC ± 4 PLC ± ANGLES ± FINISH					
						
MATERIAL			SIZE A2	CAGE CODE 00779	DRAWING NO C-215875	RESTRICTED TO -
CUSTOMER DRAWING			SCALE 4:1	SHEET 1 OF 3	REV Y3	

