

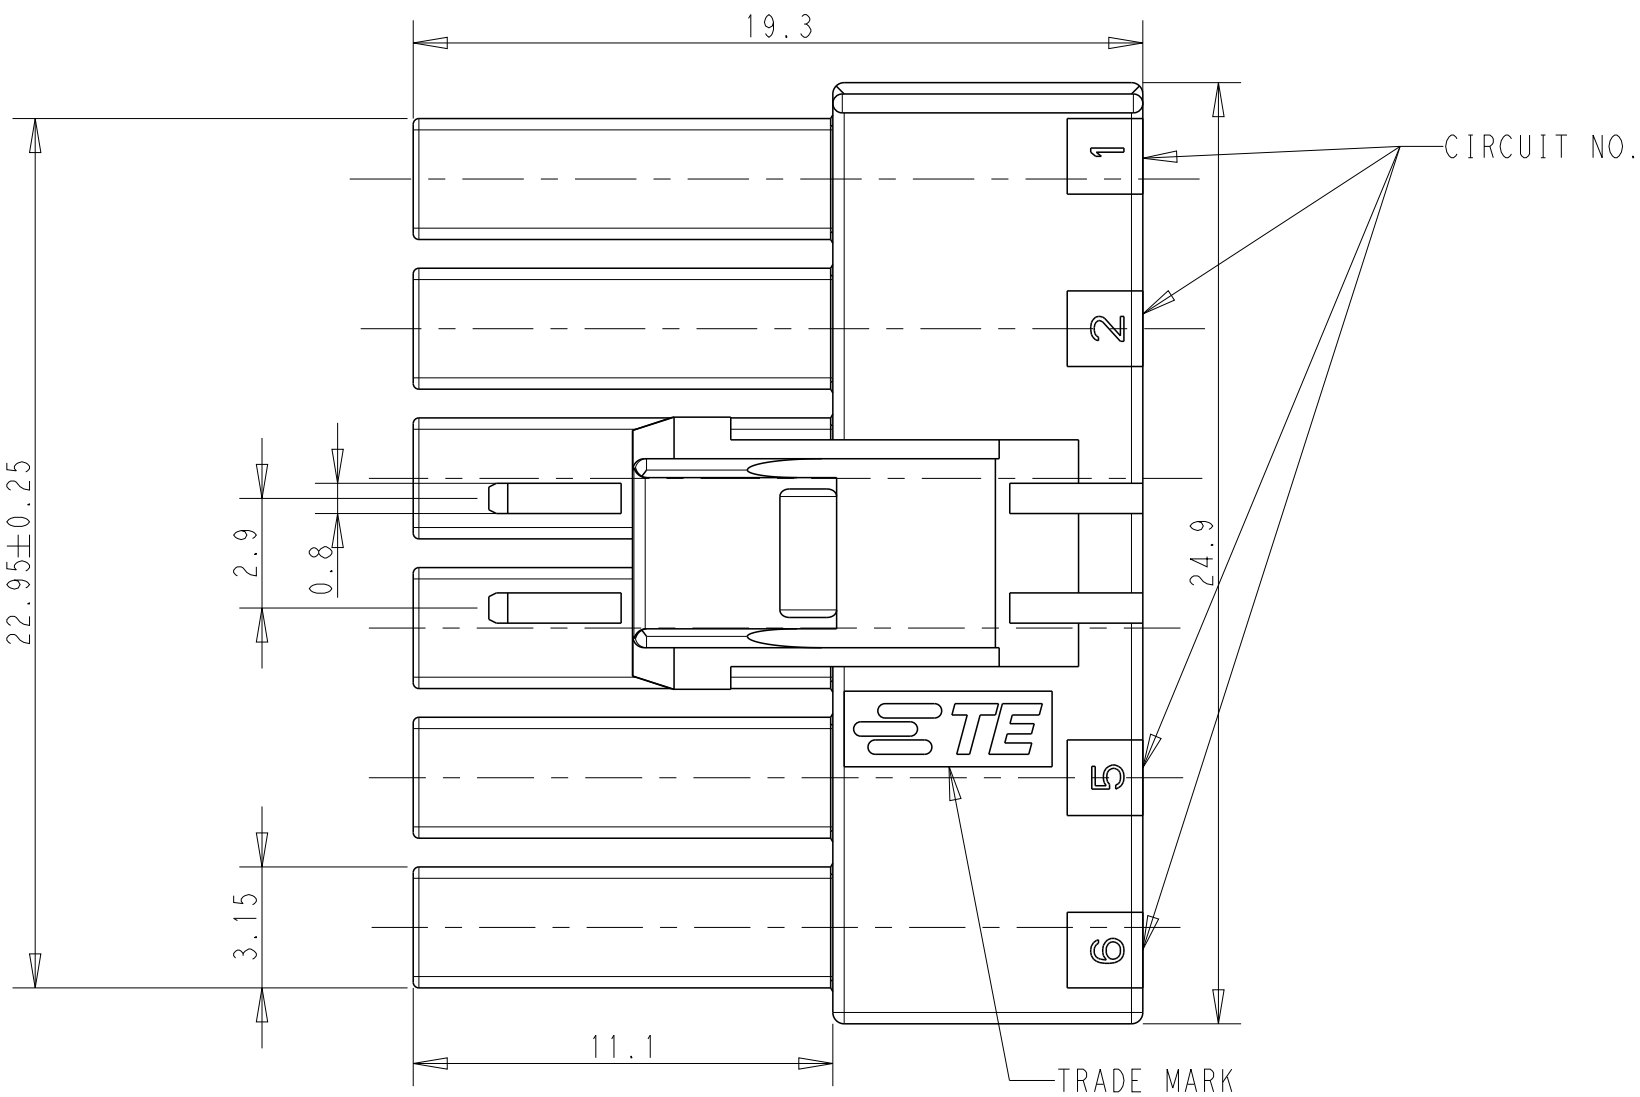
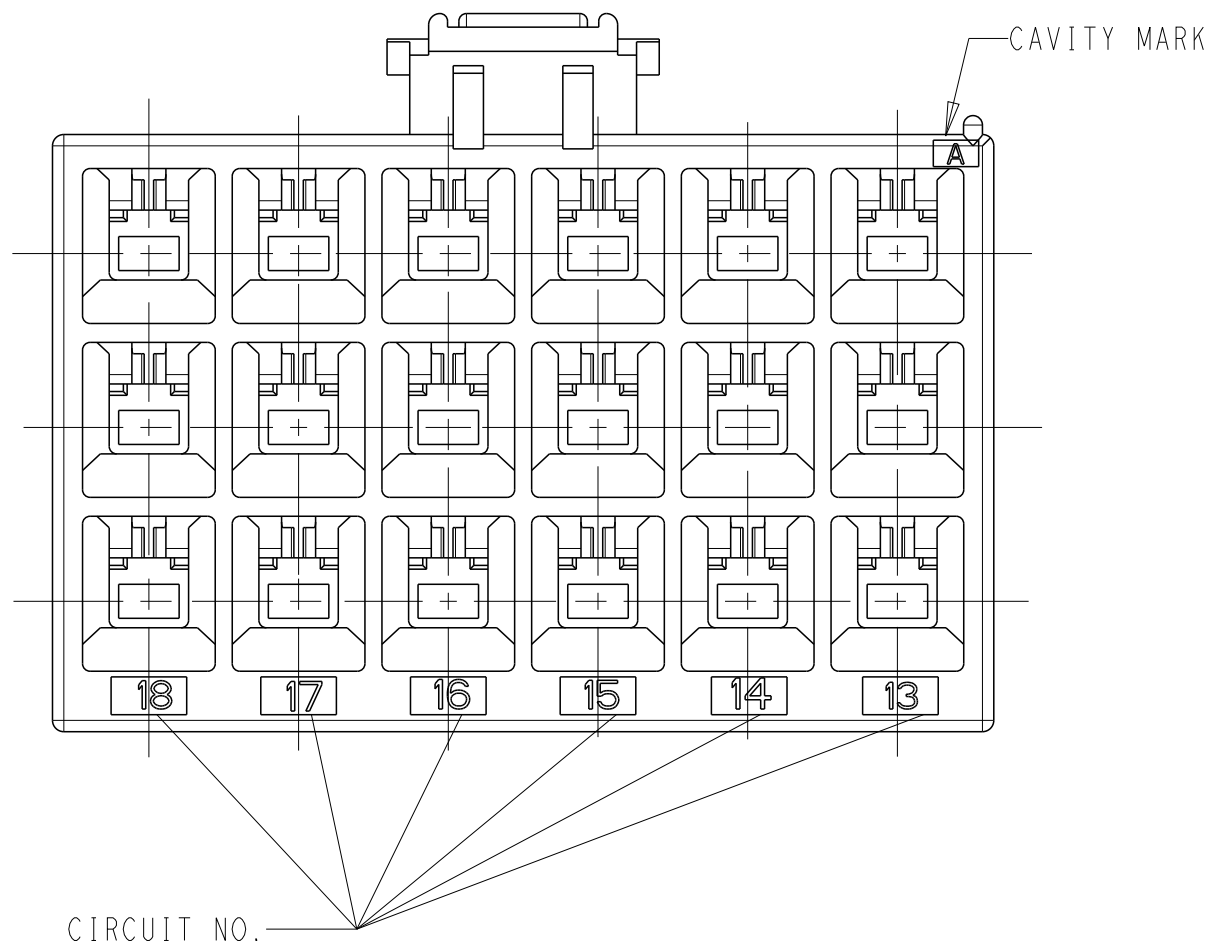


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	REVISED PER ECR-20-100642	19SEP2022	M.G	D.Z

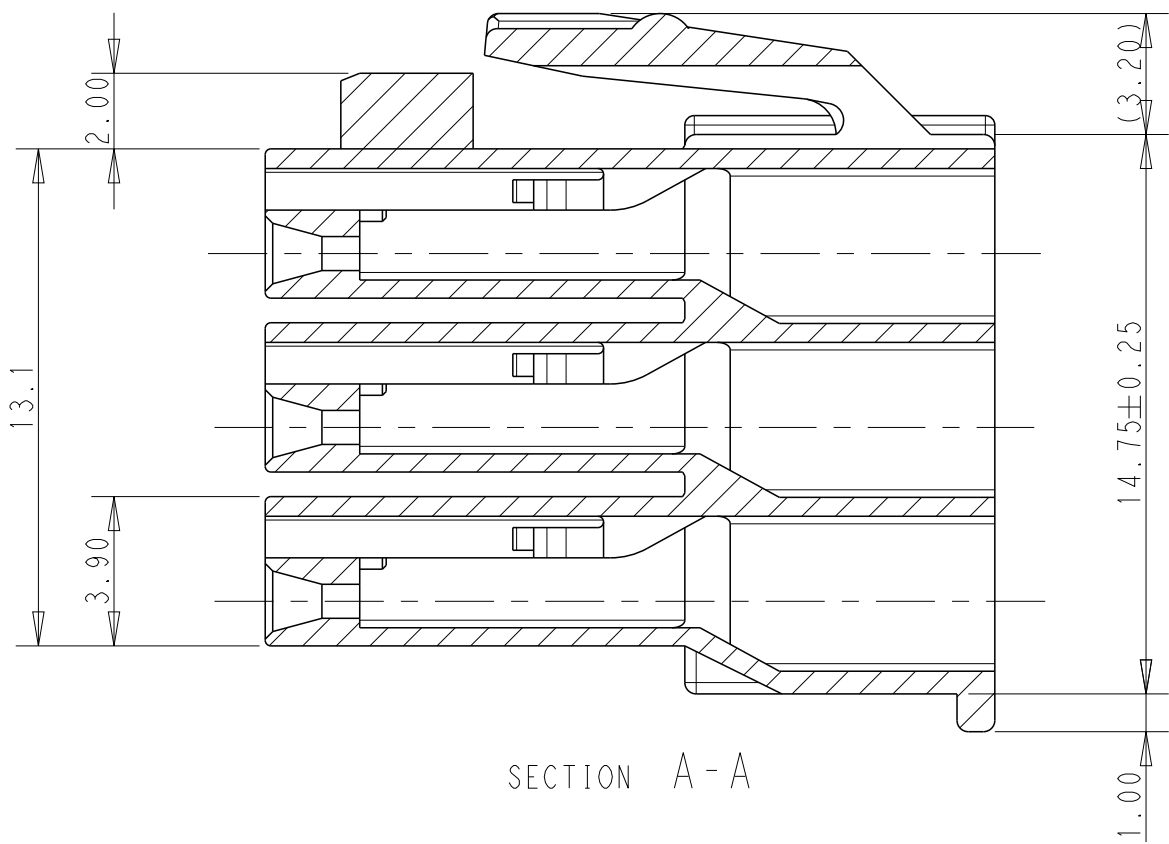

- 1 APPLICABLE CONTACT P/N:
REC CONTACT: 175152- (20-16 AWG)
175151- (26-22 AWG)
- 2 MATING CONN.P/N:
CAP HSG: 176290- (FREE HANGING)
176300- (PANEL MOUNT)
TAB CONTACT: 175150- (20-16 AWG)
175149- (26-22 AWG)
- 3 INSTRUCTION SHEET: IS-503J.

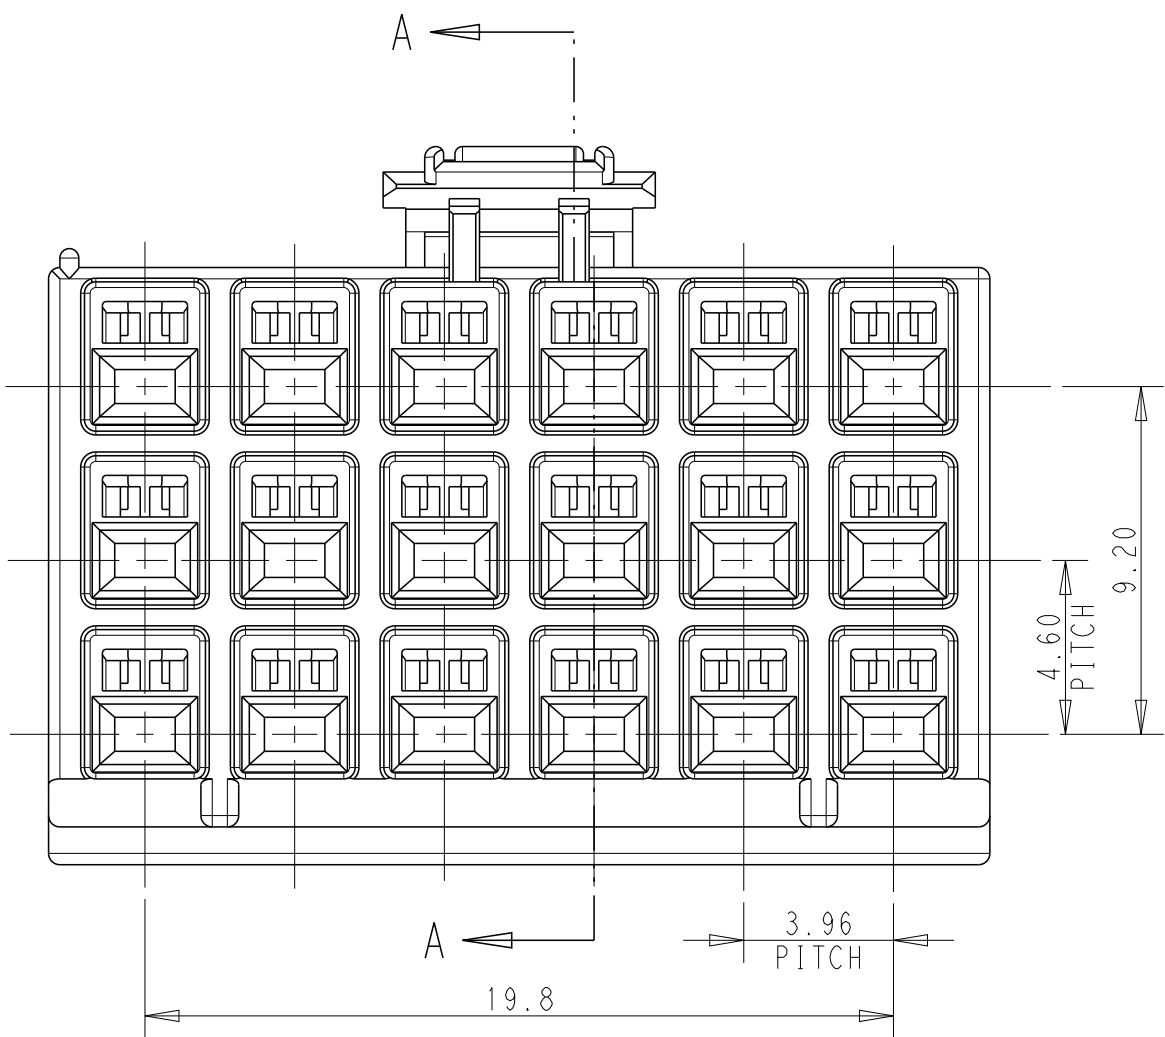

	BLACK	18	176280-9
DEVELOPMENT	BLUE	18	176280-6
DEVELOPMENT	YELLOW	18	176280-4
DISCONTINUED	RED	18	176280-2
	NATURAL	18	176280-1
	HOUSING COLOR	POSITION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. SHINDO CHK Y. FUJITA APVD N. ONOUE	23NOV1989 23NOV1989 23NOV1989	TE Connectivity			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME AMP UNIVERSAL POWER CONN 3.96MM PITCH 18 POS PLUG HSG (TPL ROW)			
0 PLC ± 1 PLC ±0.25 2 PLC ±0.20 3 PLC ± 4 PLC ± ANGLES ±3°		FINISH - -		SIZE A2			
MATERIAL NYLON 6/6 (UL94V-0)		WEIGHT -		CAGE CODE 00779			
		RESTRICTED CUSTOMER		DRAWING NO C-176280			
				RESTRICTED TO			
				SCALE 5:1			
				SHEET 1 OF 1			
				REV C			