
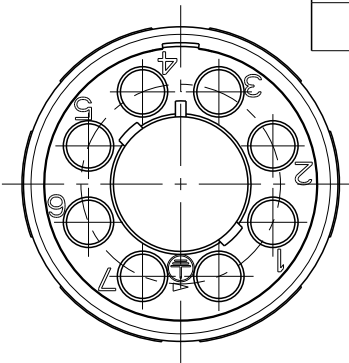
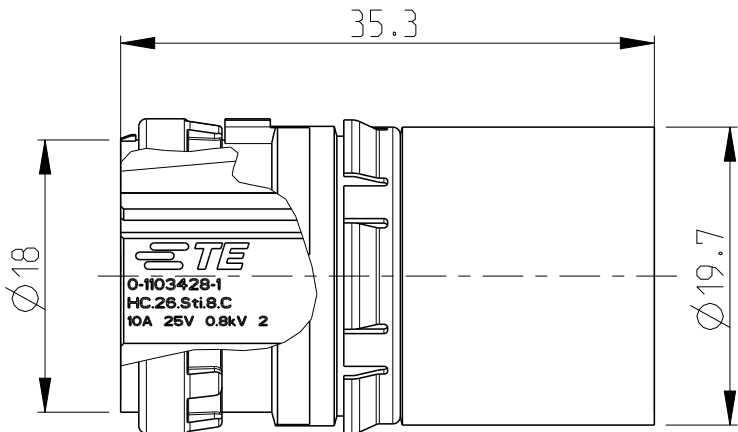


REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	C 3	ECR-15-014241	27OCT2015	RK	JB
	C 4	REV. PER ECR-16-000458	12JAN2016	ER	DO
	C 5	PRINT (PARTIAL) MOVED TO ITEM NO. 1 (PCN E-17-007296)	23MAY2017	ER	DO
	C 6	ECR-26-267636	04FEB2026	AP	RK

Notes



- 1
- SUITABLE HOUSINGS: SERIES HC26
CUSTOMER DRAWING: 1103433, 1103434
- 2
- OUTER DIMENSIONS OF INSULATION: MAX. Ø3.2 MM
- 3
- SUITABLE CRIMP CONTACTS:
CUSTOMER DRAWING: 827040
- 4
- SUITABLE SUB-MIN. COAXICON CONTACTS:
CUSTOMER DRAWING: 51563
- 5
- SUITABLE LWL (OPTICS) CONTACTS:
CUSTOMER DRAWING: 216341
- 6
- SUITABLE INSERTION TOOL:
CUSTOMER DRAWING: 1102855
- 7
- SUITABLE EXTRACTION TOOL:
CUSTOMER DRAWING: 1102855
- 8
- SUITABLE SIGNAL INSERT:
CUSTOMER DRAWING: 1103426
- 9
- STANDARDS:
DIN EN 61984, DIN EN 60664-1
- 10
- POLARIZATION RIPS
- 11
- PACKAGING 0-1 /0-2:
40 SETS IN A CARTON
- 12
- PACKAGING 0-3:
40 PIECE

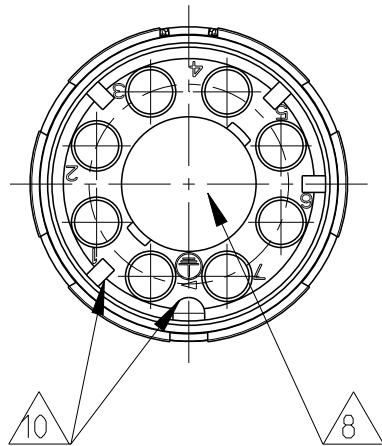


LABELING PN 0-2



LABELING PN 0-3

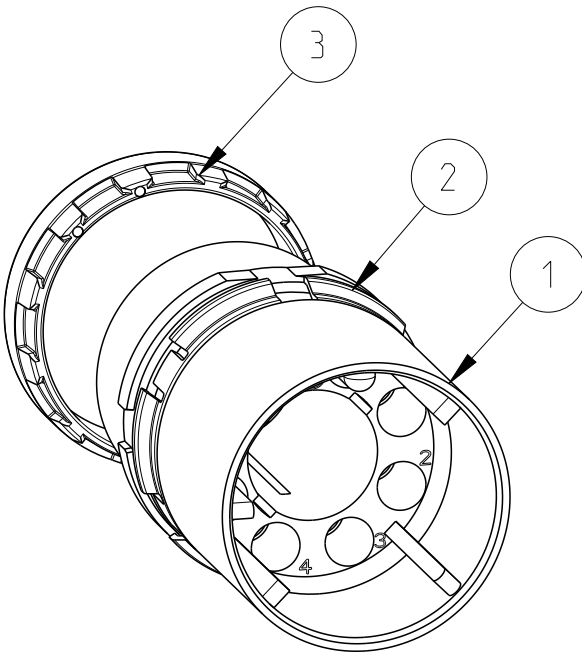

PN 0-1 AS SHOWN

			11 PACKAGING 0-1 70-2: 40 SETS IN A CARTON					
			12 PACKAGING 0-3: 40 PIECE					
-	-	1	ADAPTOR RING	PA-66-GF25	GREY	SERIES HC26, INSERT	3	
-	-	1	RETAINING RING	PA-66-GF25	GREY	SERIES HC26, INSERT	2	
1	1	1	MALE INSERT	PBT-GF10	GREY	SERIES HC26, INSERT	1	
0-3	0-2	0-1	DESCRIPTION	MATERIAL	COLOR	NOTE	ITEM	
PN/QTY								
THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN H.BRAUN 28OCT2008	 TE Connectivity			
				CHK T.VETTER 28OCT2008				
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD T.SCHNURPFEL 28OCT2008	NAME MALE INSERT ASS'Y SERIES HC26, 8-POS., TYPE III+ CIRCULAR HYBRID CONNECTOR			
				PRODUCT SPEC 108-94485				
MATERIAL -		FINISH -		APPLICATION SPEC 114-94369	SIZE A3	CAGE CODE 00779	DRAWING NO C-1103428	RESTRICTED TO -
				CUSTOMER DRAWING		SCALE 2:1	SHEET 1 OF 1	REV C6