
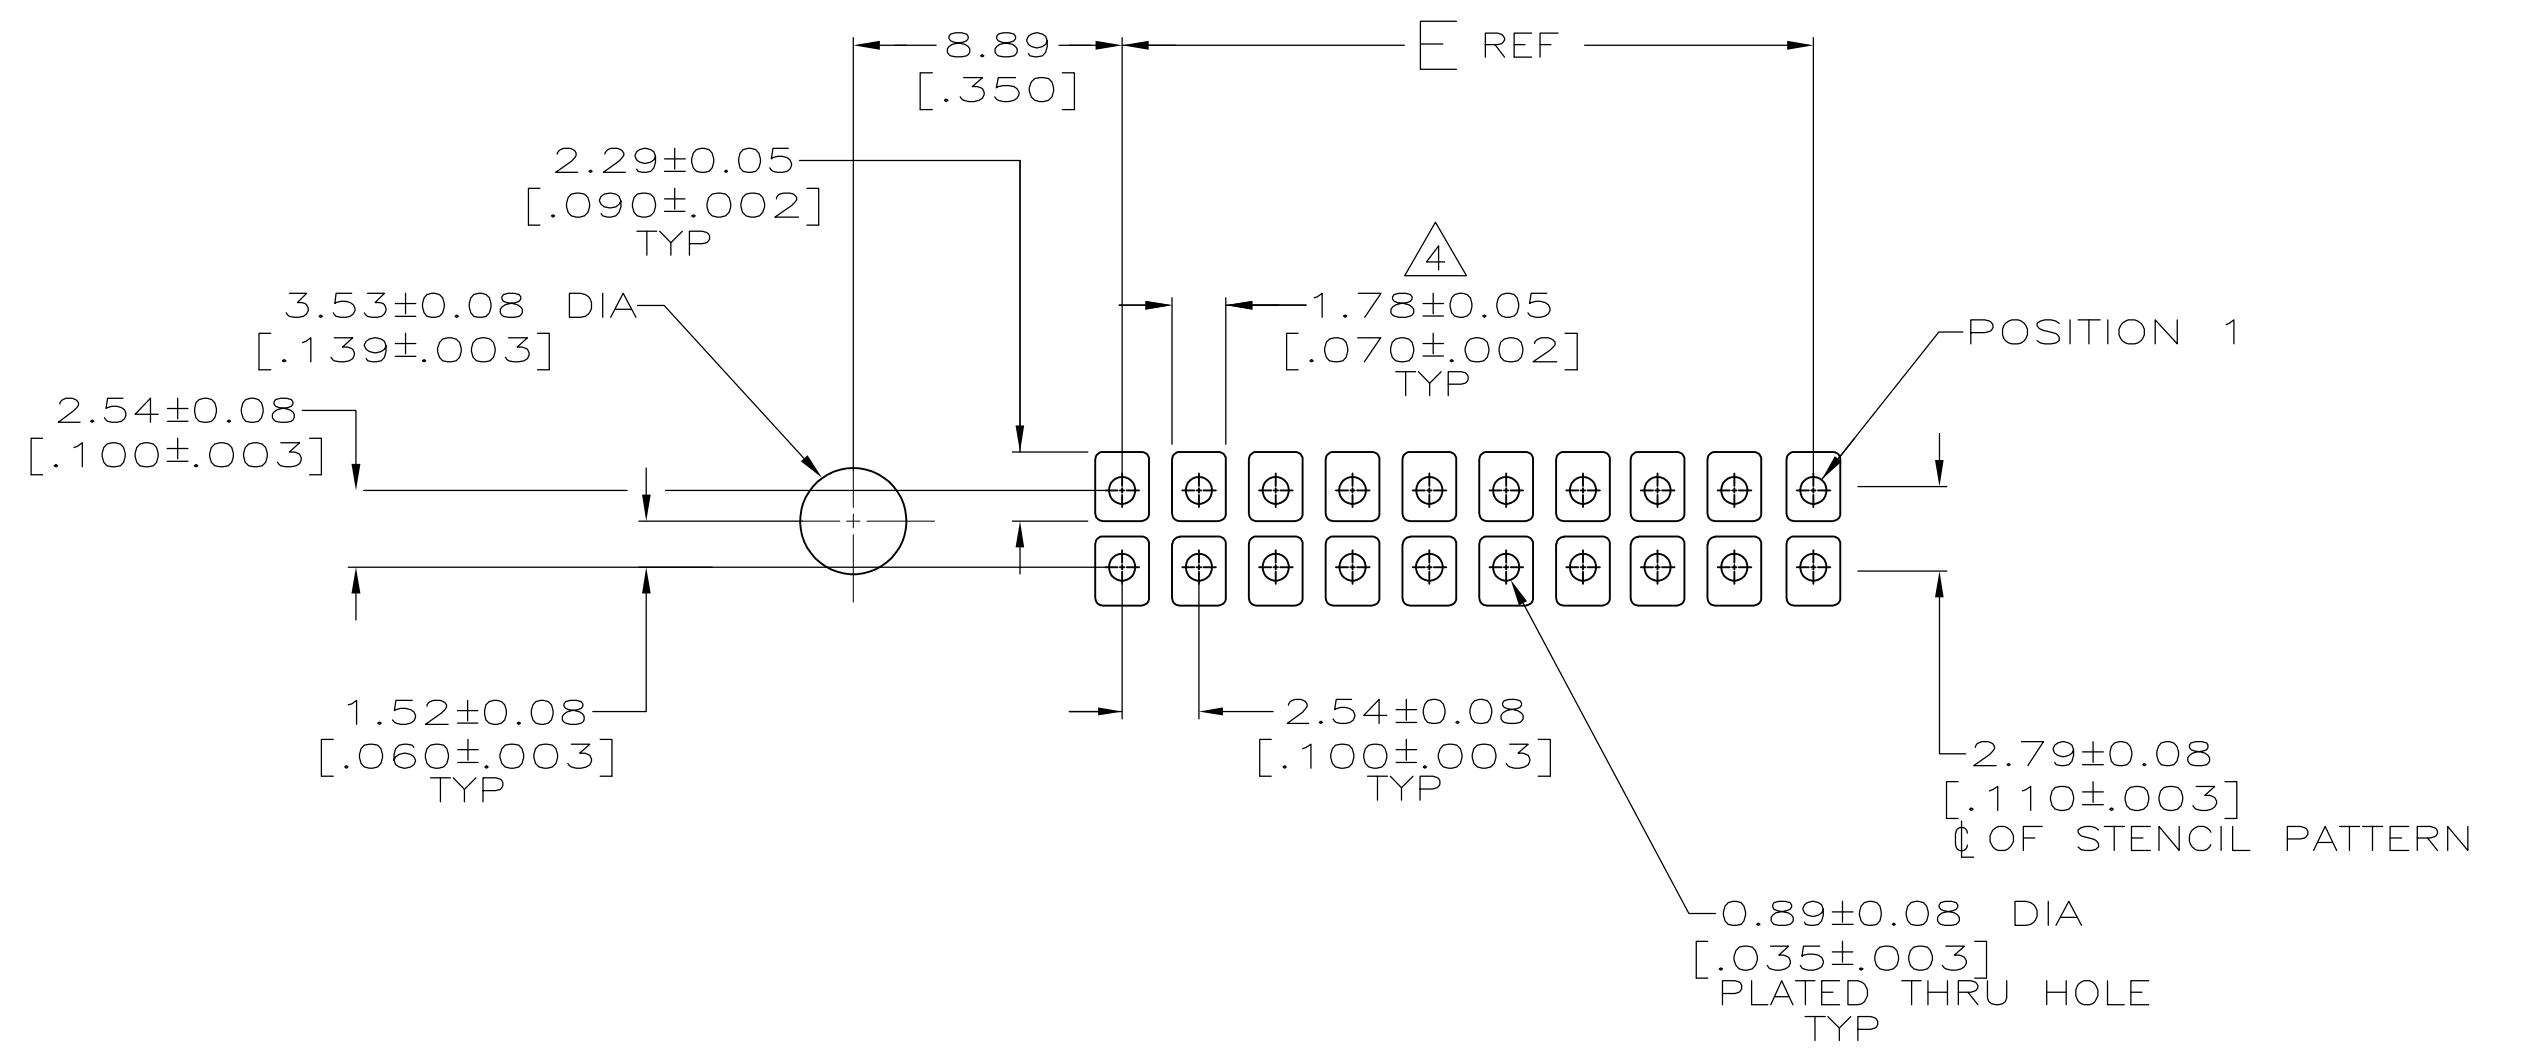


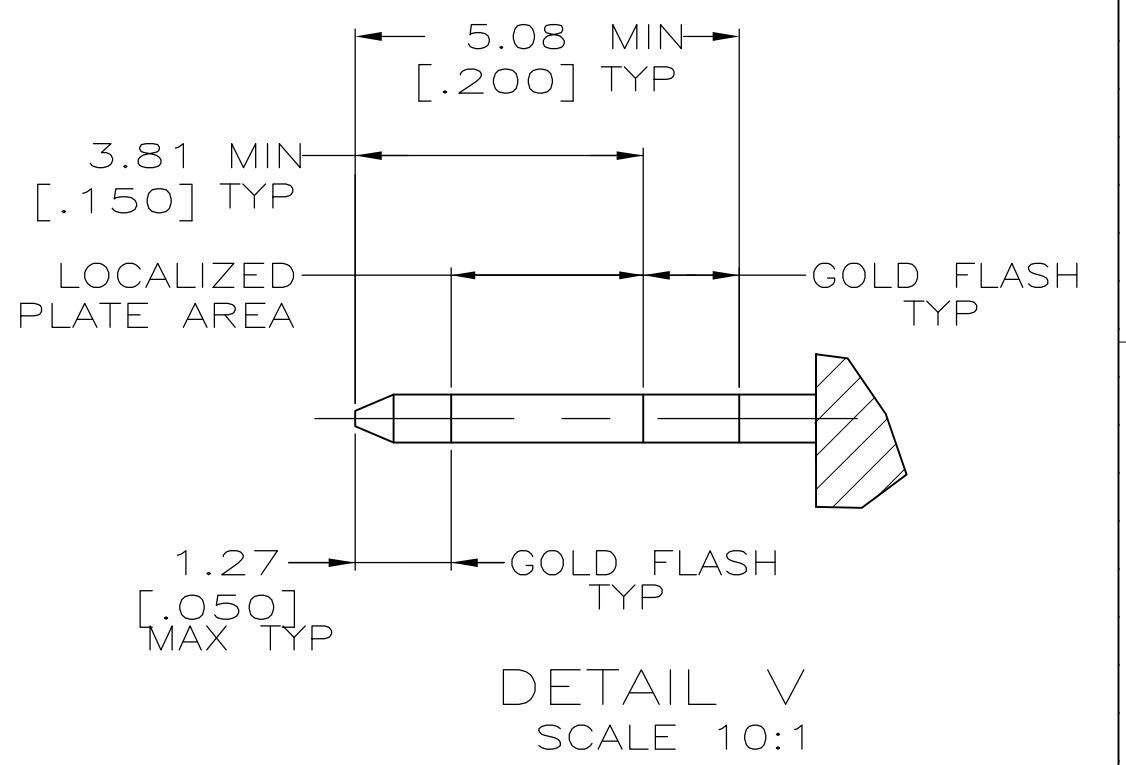

- ① HOUSING AND LATCHES: POLYESTER, FLAME RETARDANT, UL 94V-0 RATED, GLASS FILLED, RED. POSTS: BRASS OR PHOSPHOR BRONZE.
- ② POSTS: GOLD FLASH OVER PALLADIUM-NICKEL PLATE, $0.76\mu\text{m}$ [.000030] MIN TOTAL ON THE LOCALIZED PLATE AREA, $2.54\mu\text{m}$ [.000100] MIN TIN-LEAD PLATE ON THE SOLDER-TAIL, $1.27\mu\text{m}$ [.000050] MIN NICKEL UNDERPLATE ON THE ENTIRE POST.
-OR-
 $0.76\mu\text{m}$ [.000030] MIN GOLD PLATE ON THE LOCALIZED PLATE AREA, $2.54\mu\text{m}$ [.000100] MIN TIN-LEAD PLATE ON THE SOLDER-TAIL, $1.27\mu\text{m}$ [.000050] MIN NICKEL UNDERPLATE ON THE ENTIRE POST.
- ③ COORDINATE DIMENSIONS APPLIES FROM BASIC LOCATION.
- ④ RECOMMENDED STENCIL THICKNESS EQUALS 0.25 [.010].
- ⑤ FOR 10 POSITION HEADER ONLY, ON SLOT LOCATED AS SHOWN.
- ⑥ NO SNAP-IN POLARIZING FEATURE ON THIS END FOR 10 POSITION HEADER.
- ⑦ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- ⑧ ONLY USED IN WAVE SOLDER PROCESS

14.25 [.561]	10.16 [.400]	17.78 [.700]	21.84 [.860]	27.94 [1.100]	32.00 [1.260]	10	9-111948-1 
14.63 [.576]	10.16 [.400]	17.78 [.700]	21.84 [.860]	27.94 [1.100]	32.00 [1.260]	10	111948-1
F	E	D	C	B	A	NUMBER OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG. 25 JAN 96 C. DORWART CHG. 30 JAN 96 R. STONE		 TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0.1 PL/C ± . 1 PL/C ± .015 [1.035] 2 PL/C ± . 4 PL/C ± . ANGLES ± . FINISH		NAME UNIVERSAL HEADER, HIGH TEMPERATURE WITH POLARIZATION PIN, AMP-LATCH —	
		APD. 30 JAN 96 D. MILLER PRODUCT SPEC 108-40018 APPLICATION SPEC		SIZE CAGE CODE DRAWING NO A1 00779 C111948	
MATERIAL 		WEIGHT 0.000000		RESTRICTED TO —	
		CUSTOMER DRAWING		SCALE 4:1 SHEET 1 OF 1 REV L2	