


RJ45 10/100/1000 Base-TX 1x4 Jack with Magnetic Module



ARJ14A Series

Request Samples



Check Inventory



Various sizes

RoHS/RoHS II Compliant

MSL Level = N/A

Features

- Tab down
- Available with or without LED
- Suitable CAT 5 & 6 cable and UTP
- Comply IEEE 802.3ab
- LAN Magnetic with RJ45
- Suitable for RoHS compliant reflow

Applications

- 10, 100 and 1000 Base-T LAN
- NIC, LoM and PC

Electrical Specifications

Part Number	Turns Ratio $\pm 5\%$		Tab Option	EMI Fingers (see Mechanical)	LEDs	Insertion Loss (dB typ)	Return Loss (dB typ @100 Ω $\pm 15\%$)		
	TX	RX			L/R	0.3- 100 MHz	1- 10 MHz	30 MHz	60-80 MHz
ARJ14A-M□SA-MU2	1CT:1CT	1CT:1CT	DOWN	Yes/No	-	-1.2	-18	-16	-12
ARJ14A-M□SB-MU2	1CT:1CT	1CT:1CT	DOWN	Yes/No	-	-1.2	-18	-16	-12
ARJ14A-M□SC-MU2	1CT:1CT	1CT:1CT	DOWN	Yes/No	-	-1.2	-18	-16	-12
ARJ14A-M□SD-A-B-ΔMU2	1CT:1CT	1CT:1CT	DOWN	Yes	G/Y	-1.2	-18	-16	-12
ARJ14A-M□SD-MU2	1CT:1CT	1CT:1CT	DOWN	Yes/No	-	-1.2	-18	-16	-12

Part Number	Crosstalk (dB TYP)			Common Mode Rejection (dB TYP)		Hipot (Vrms)
	1 - 10 MHz	30 - 60 MHz	60 - 100 MHz	1 - 50 MHz	50 - 130 MHz	
ARJ14A-M□SA-MU2	-40	-35	-30	-30	-20	1500
ARJ14A-M□SB-MU2	-30	-30	-30	-30	-20	1500
ARJ14A-M□SC-MU2	-40	-35	-30	-30	-20	1500
ARJ14A-M□SD-A-B-ΔMU2	-40	-35	-30	-30	-20	1500
ARJ14A-M□SD-MU2	-40	-35	-30	-30	-20	1500

□: Mechanical option: E, F or I for non- LED; A or B for LED.

Δ: LED polarity option E or F

Contact Abracon for more custom configurations. See options to build a custom configuration.




12117 Bee Caves Rd, Bldg-3, Suite 200
Bee Cave, TX 78738
Phone: 512-371-6159 Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISION D : 3/20/2026

ABRACON IS
ISO9001-2015
CERTIFIED

RJ45 10/100/1000 Base-TX 1x4 Jack with Magnetic Module



ARJ14A Series

Request Samples



Check Inventory



Various sizes

RoHS/RoHS II Compliant

MSL Level = N/A

Environmental Specifications

- Storage Temp: -40°C TO +85°C.
- Operating Temp: 0°C TO +70°C.
- JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F

Part Identification

ARJ14A - - - -

Mechanical	Schematic	Left LED color	Right LED color	LED polarity	Turns Ratio (Tx)	Turns Ratio (Rx)	Gold plating
MA ~ MI (Please see mechanical section)	SA ~ SZ (Please see schematic section)	(e.g. B for Yellow,	(e.g. B for Yellow,	Blank: No LED (ME ~ MI)	K: 1CT:1.41	S: 1CT:1.41	1: 3u “
		AB for Green-Yellow)	AB for Green-Yellow)	E ~ H (Please see 7.0 LED polarity section)	L: 1CT:1	T: 1CT:1	2: 6u “
		Blank: No LED (ME ~ MI)	Blank: No LED (ME ~ MI)		M: 1CT:1CT	U: 1CT:1CT	3: 15u “
		A: Green	A: Green		N: 1.414:1CT	V: 1.414:1CT	4: 30u “
		B: Yellow	B: Yellow		O: 1CT:1.41CT	W: 1CT:1.41CT	5: 50u “
		C: Amber	C: Amber		P: 1:2CT	X: 1:2CT	
		D: Orange	D: Orange		Q: 1:1.414CT	Y: 1:1.414CT	
					R: 1CT:2.5	Z: 1CT:2.5	

RJ45 10/100/1000 Base-TX 1x4 Jack with Magnetic Module



ARJ14A Series

Request Samples



Check Inventory




Various sizes

RoHS/RoHS II Compliant

MSL Level = N/A

Marking

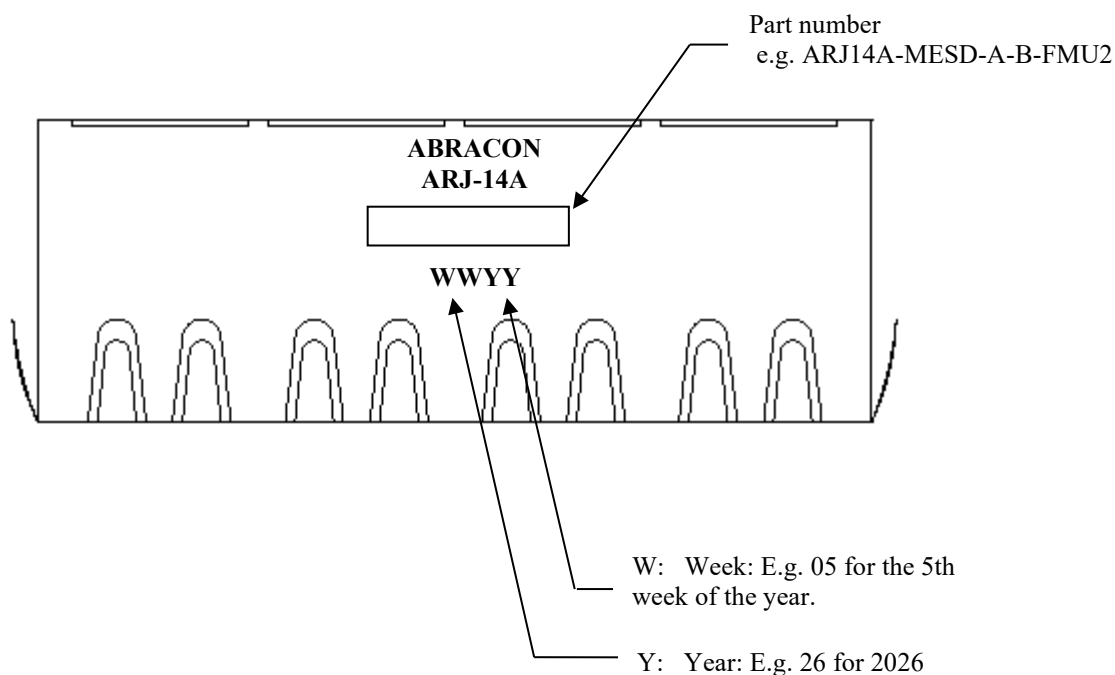

Marking Method = Laser Marking




12117 Bee Caves Rd, Bldg-3, Suite 200
Bee Cave, TX 78738
Phone: 512-371-6159 Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISION D : 3/20/2026

ABRACON IS
ISO9001-2015
CERTIFIED

RJ45 10/100/1000 Base-TX 1x4 Jack with Magnetic Module



ARJ14A Series

Request Samples



Check Inventory



Various sizes

RoHS/RoHS II Compliant

MSL Level = N/A

Materials

1. **Housing Material:**
MATERIAL: NYLON GF (Fr50) UL94V-0

STANDARD COLOR: BLACK
2. **Insert Material:**
MATERIAL: Phos-Bronze C5210 EH---0.35mm Thickness.

Insert -PBT GF UL94V-0

1.PLATING(1) NICKEL

2.PLATING (2) 100%Sn


3.PLATING (3) GOLD (3u " ~50u ") (see options)
3. **Plate Material:**
PBT GF UL 94V-0
4. **Contact pin Material:**
MATERIAL: Phos-Bronze C5191---0.35mm Thickness

1.PLATING (1) NICKEL

2.PLATING (2) 100%Sn
5. **Shielding Material:**
BRASS C2680 PLATING NICKEL
6. **Operating life:**
750 Cycles min

Note: No material substitutions allowed without prior approval by customers in writing

RJ45 10/100/1000 Base-TX 1x4 Jack with Magnetic Module



ARJ14A Series

Request Samples



Check Inventory



Various sizes


RoHS/RoHS II Compliant

MSL Level = N/A

Mechanical Dimensions

MA (10/100 Base-T)


(8 EMI Fingers)

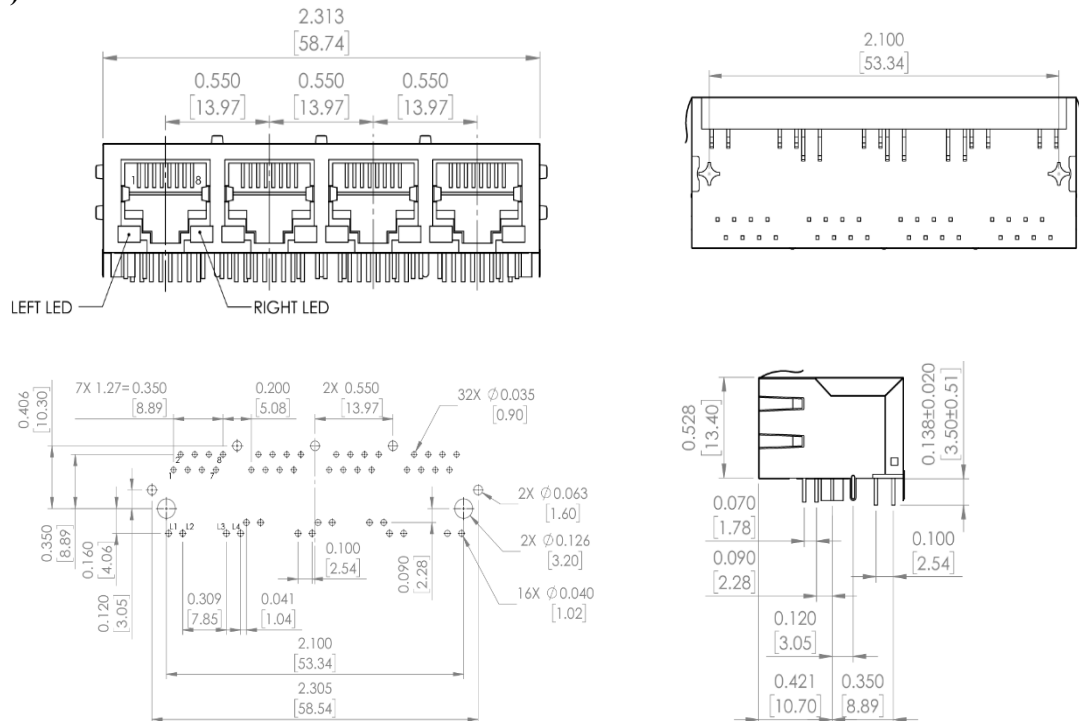

DIMENSIONS: INCHES [mm]

MB (10/100 Base-T)

(3 EMI Fingers)

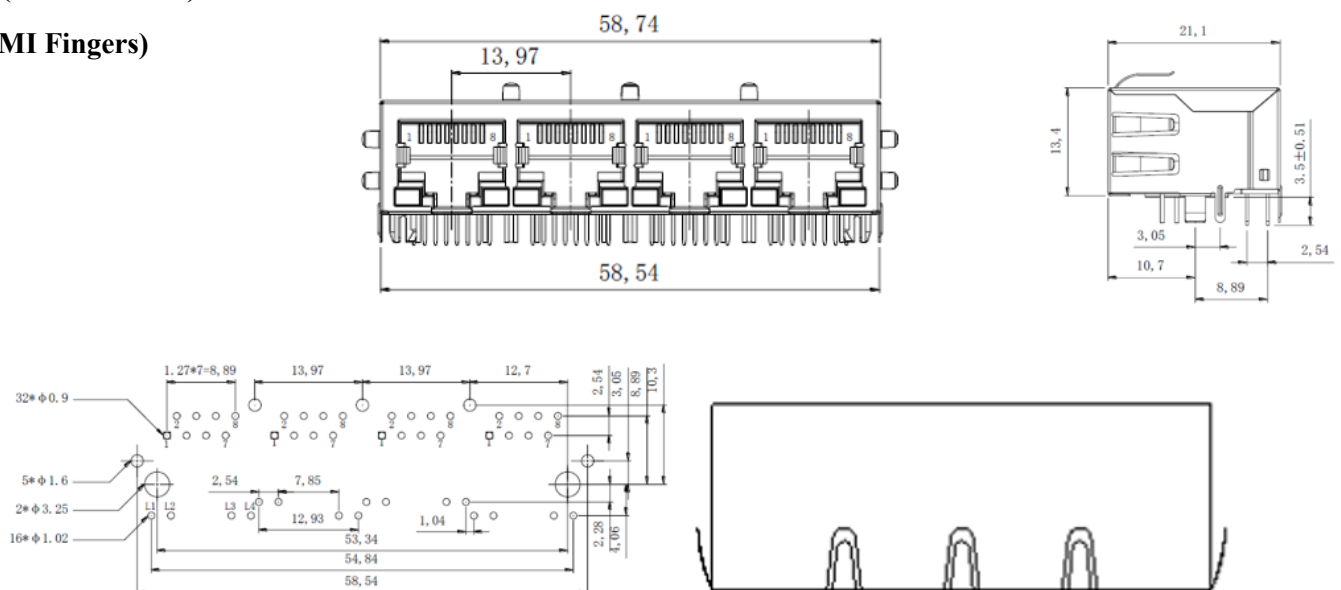

12117 Bee Caves Rd, Bldg-3, Suite 200
Bee Cave, TX 78738
Phone: 512-371-6159 Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISION D : 3/20/2026

ABRACON IS
ISO9001-2015
CERTIFIED

Request Samples



Check Inventory




MSL Level = N/A



ABRACON IS
ISO9001-2015
CERTIFIED

RJ45 10/100/1000 Base-TX 1x4 Jack with Magnetic Module



ARJ14A Series

Request Samples



Check Inventory



Various sizes

RoHS/RoHS II Compliant


MSL Level = N/A

ME (10/100 Base-T)

8 EMI Fingers,

No LED options


No LED options

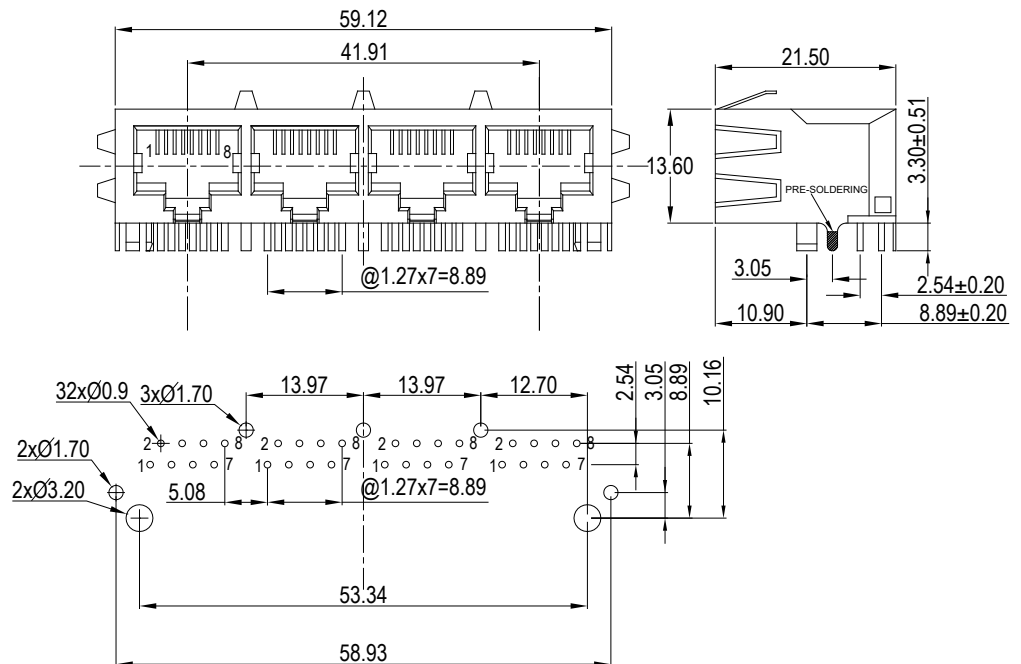

MG (1000 Base-T)

8 EMI Fingers,

No LED options

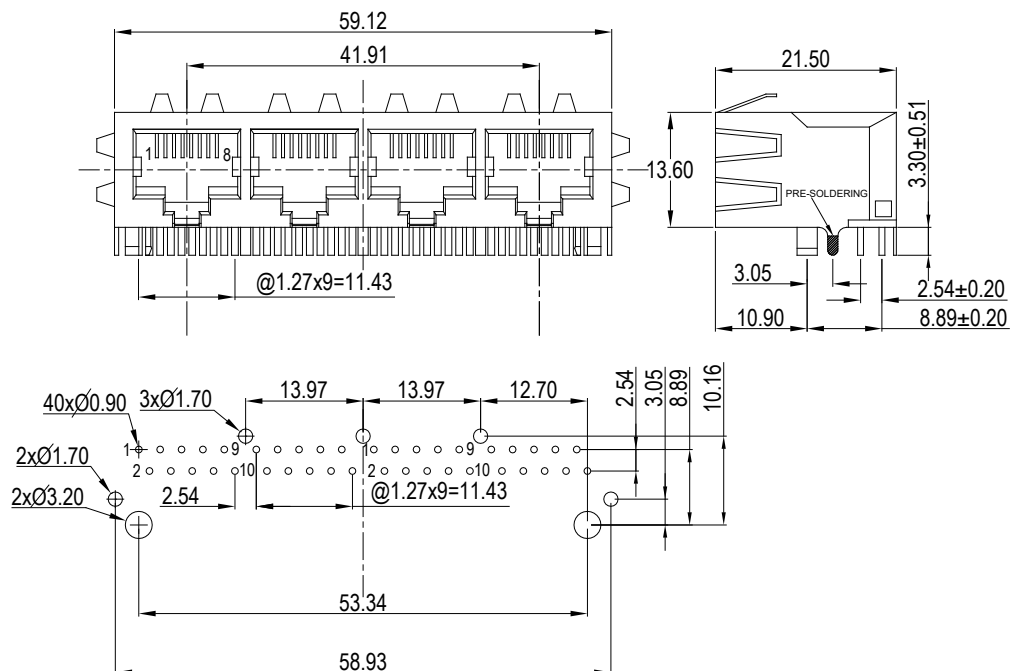

12117 Bee Caves Rd, Bldg-3, Suite 200
Bee Cave, TX 78738
Phone: 512-371-6159 Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISION D : 3/20/2026

ABRACON IS
ISO9001-2015
CERTIFIED

Request Samples




Check Inventory




MSL Level = N/A

No LED options

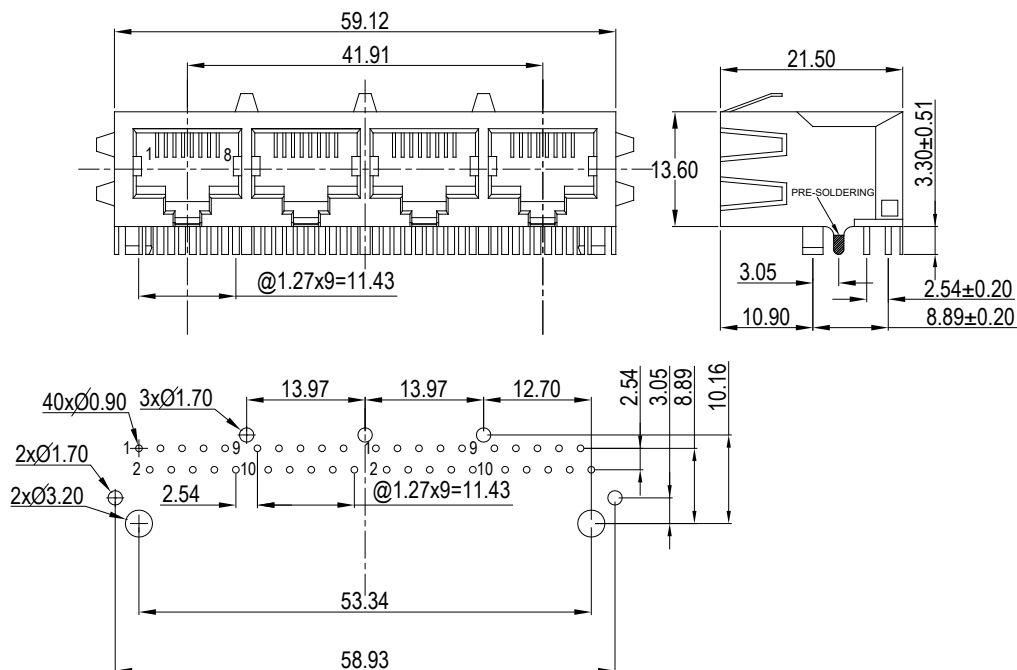


No LED options

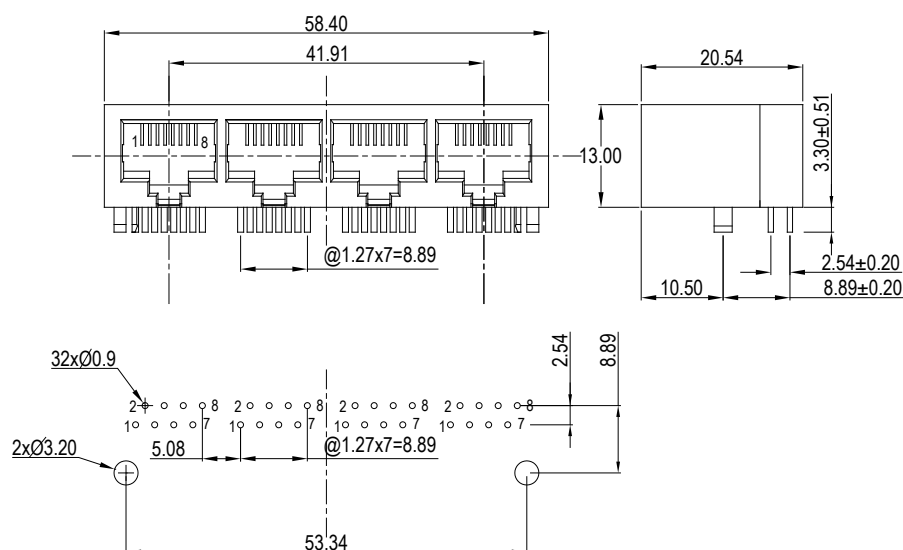

REVISION D : 3/20/2026

ABRACON IS
ISO9001-2015
CERTIFIED

RJ45 10/100/1000 Base-TX 1x4 Jack with Magnetic Module



ARJ14A Series

Request Samples



Check Inventory




Various sizes


RoHS/RoHS II Compliant

MSL Level = N/A

Schematics

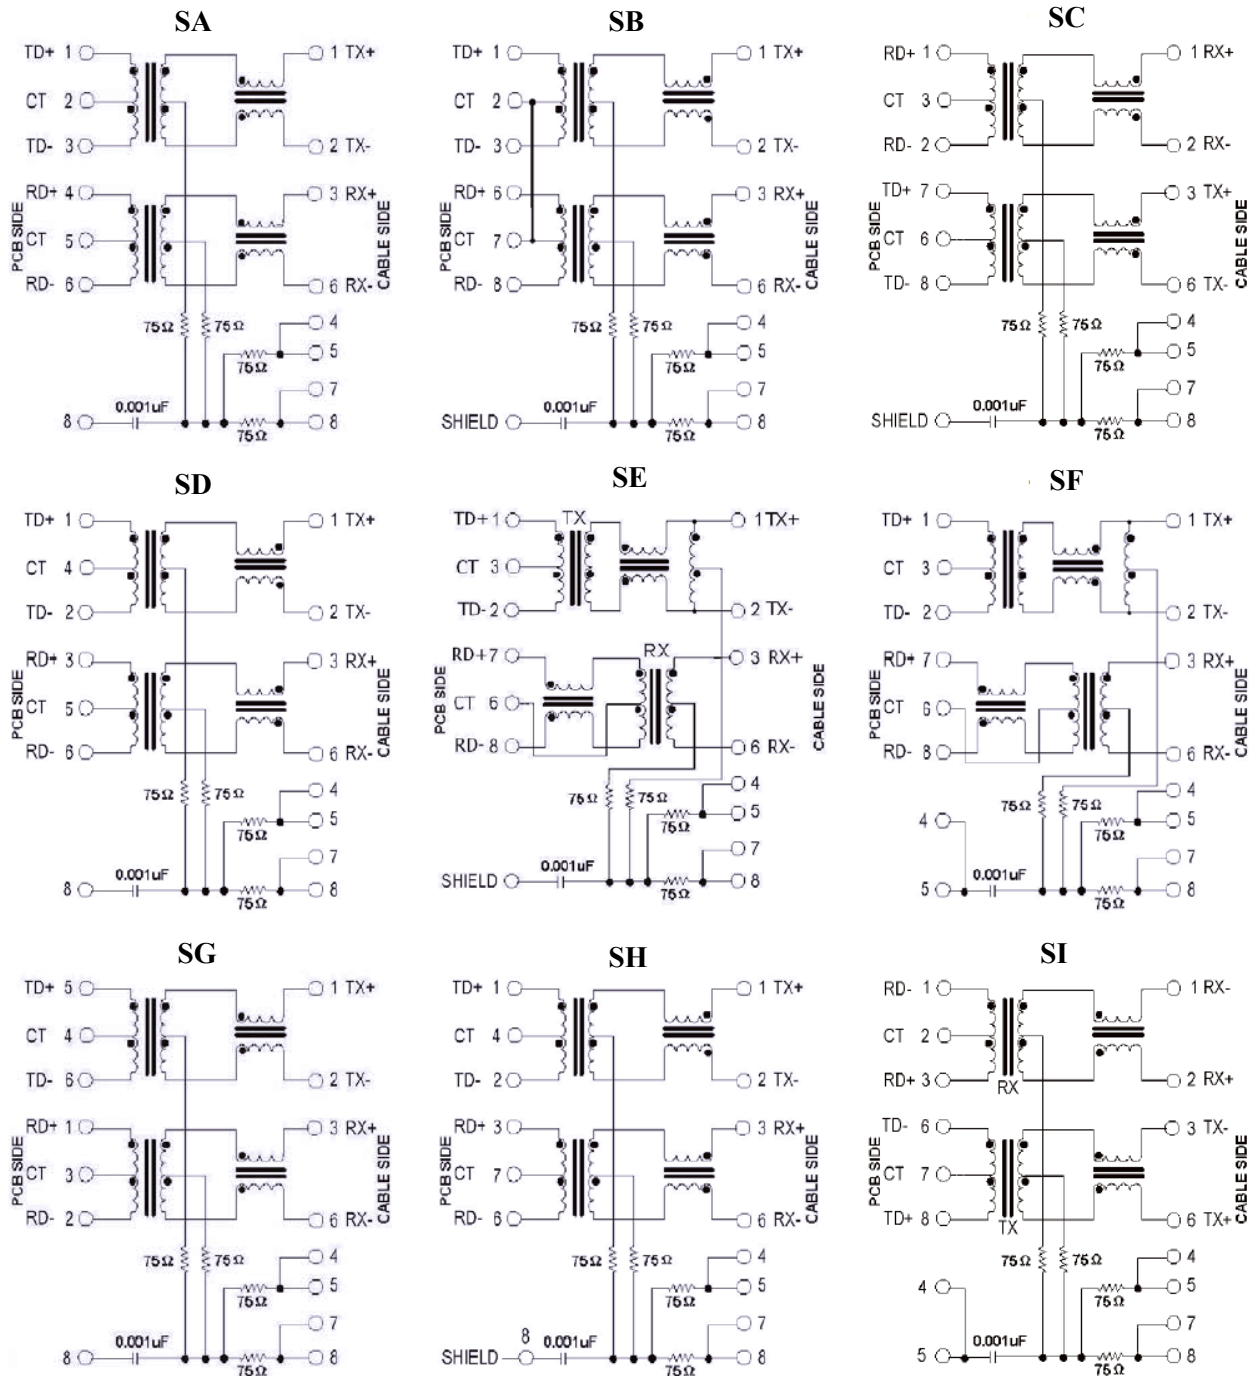

RJ45 10/100/1000 Base-TX 1x4 Jack with Magnetic Module



ARJ14A Series

Request Samples












Check Inventory




Various sizes

RoHS/RoHS II Compliant

MSL Level = N/A

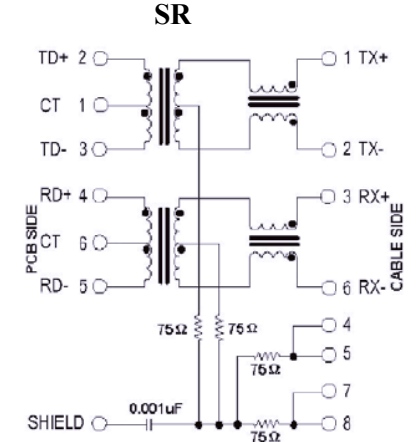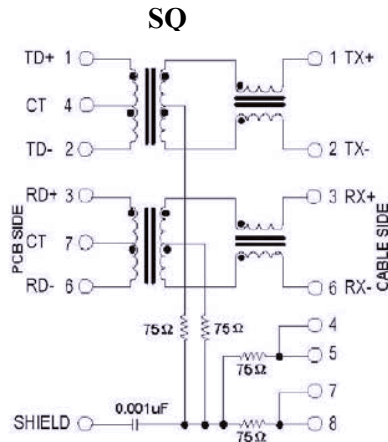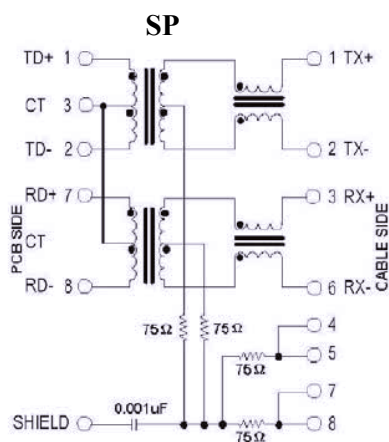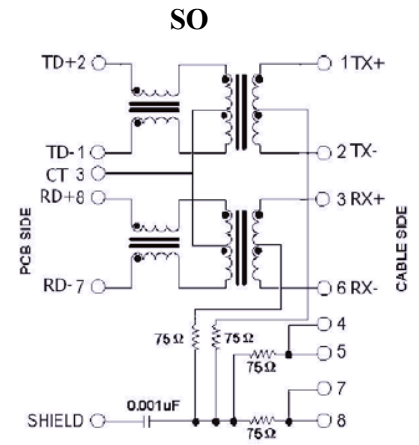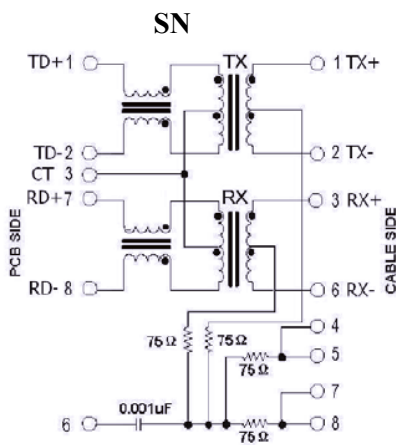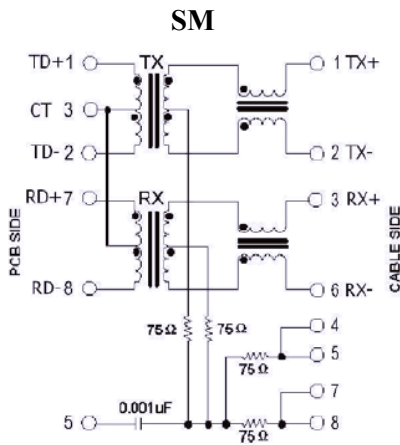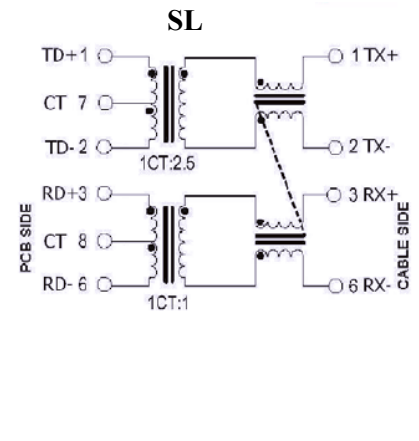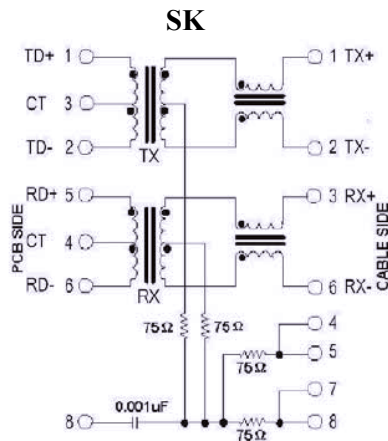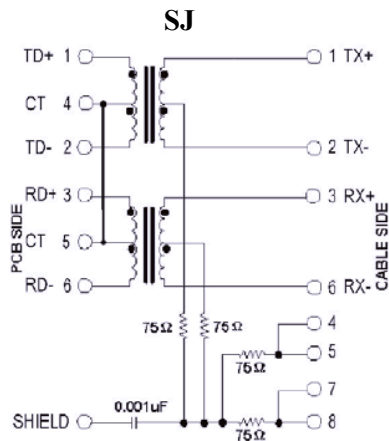

RJ45 10/100/1000 Base-TX 1x4 Jack with Magnetic Module



ARJ14A Series

Request Samples











Check Inventory



Various sizes

RoHS/RoHS II Compliant

MSL Level = N/A

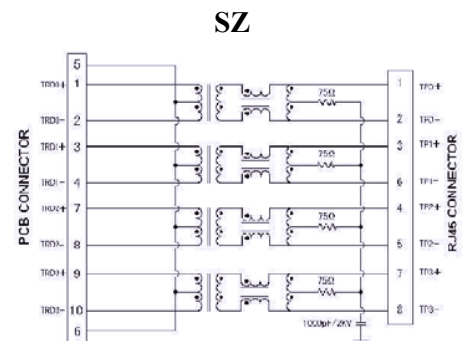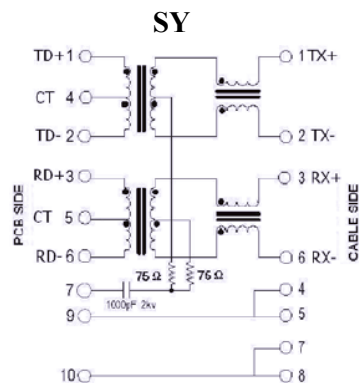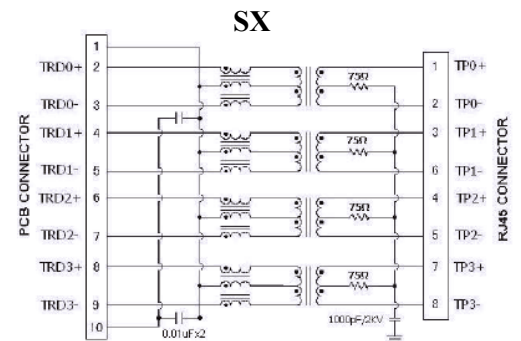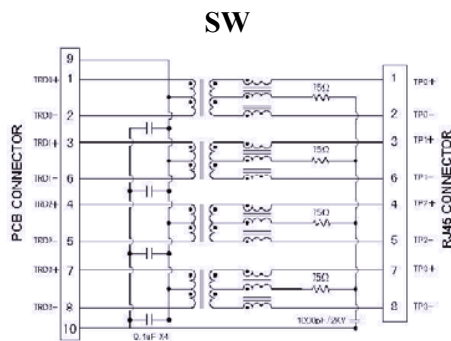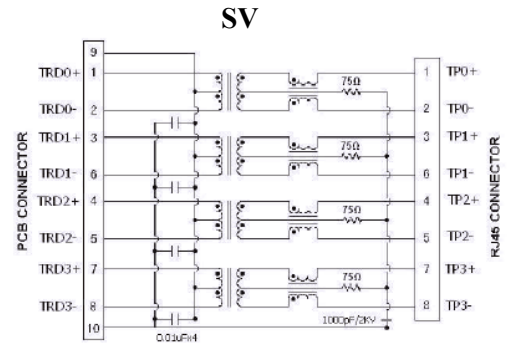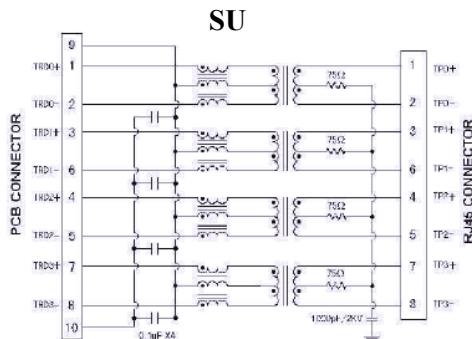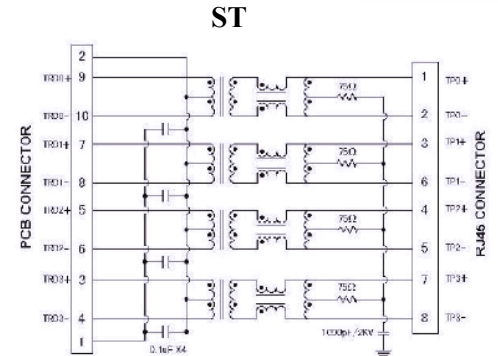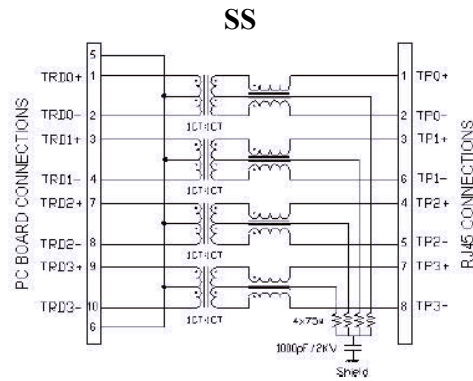

RJ45 10/100/1000 Base-TX 1x4 Jack with Magnetic Module



ARJ14A Series

Request Samples



Check Inventory



Various sizes


RoHS/RoHS II Compliant

MSL Level = N/A


LED polarity

8PIN:

E




F




10PIN:

G



H



RJ45 10/100/1000 Base-TX 1x4 Jack with Magnetic Module



ARJ14A Series

Request Samples



Check Inventory




Various sizes

RoHS/RoHS II Compliant

MSL Level = N/A

Reflow Profile

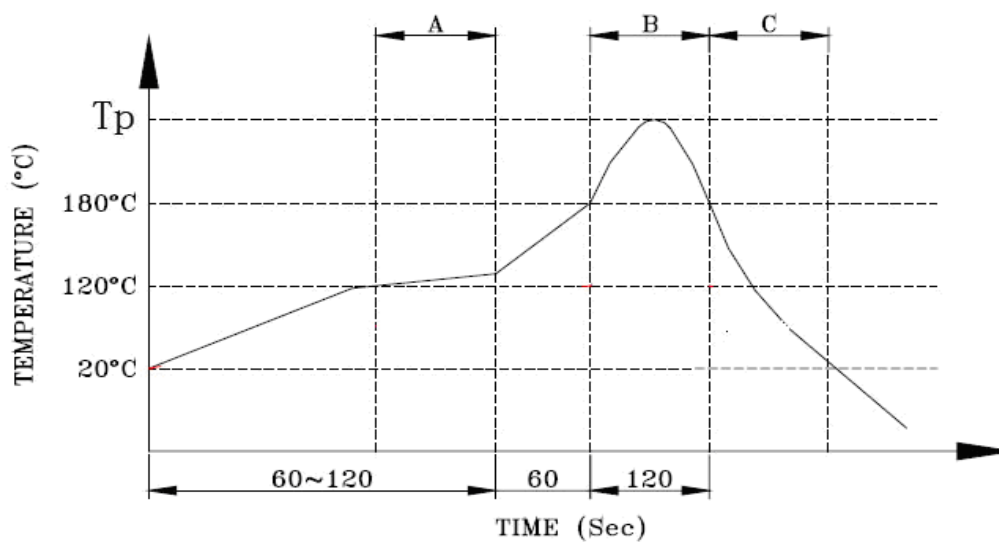

—— PIN TEMPERATURE

A. Preheating B. Soldering C. Gradual Cooling

Zone	Description	Temperature	Times
1	Preheat	150°C ~ 180°C	60 ~ 120 sec.
2	Peak heat	Tp 250°C±10°C	5 sec. MAX

Ref.

Solder paste: Sn/3.0Ag/0.5Cu

Ramp up rate: 3°C/s Max.

Ramp down rate: 6°C/s Max.



12117 Bee Caves Rd, Bldg-3, Suite 200
Bee Cave, TX 78738
Phone: 512-371-6159 Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISION D : 3/20/2026

ABRACON IS
ISO9001-2015
CERTIFIED

RJ45 10/100/1000 Base-TX 1x4 Jack with Magnetic Module



ARJ14A Series

Request Samples



Check Inventory



Various sizes


RoHS/RoHS II Compliant

MSL Level = N/A


Packing

20pcs/tray

Packaging material: PET

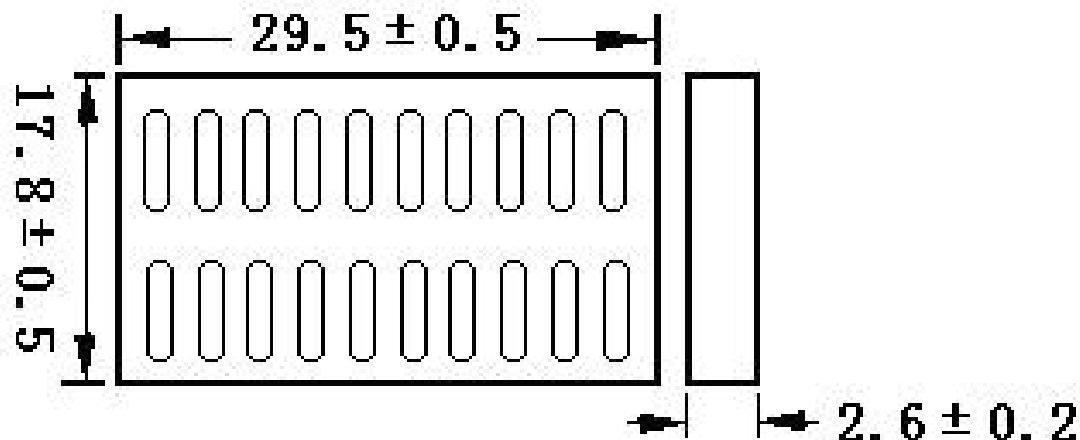

Outer carton unit : 400 pcs/ 20 Trays/box

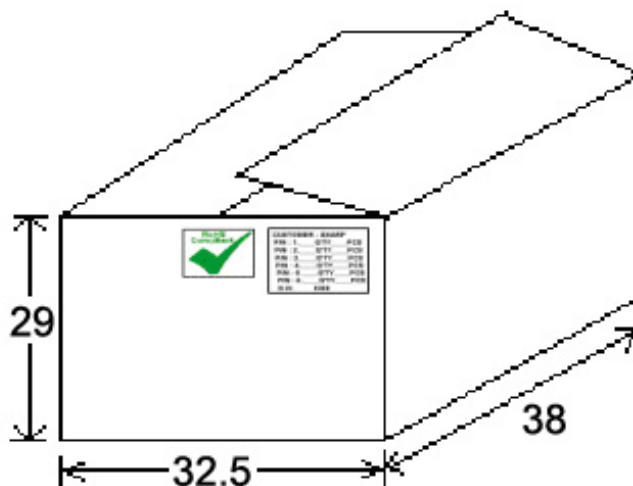

Dimensions: cm

ATTENTION: Abracon LLC's products are Commercial-Off-The-Shelf (COTS, which are designed, intended and validated for use in commercial, industrial and automotive applications. The customer is responsible for testing and verifying the performance of an Abracon solution to meet their system-level requirements.



12117 Bee Caves Rd, Bldg-3, Suite 200
Bee Cave, TX 78738
Phone: 512-371-6159 Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISION D : 3/20/2026

ABRACON IS
ISO9001-2015
CERTIFIED