

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT

ALL RIGHTS RESERVED.

LOC
GPDIST
00

REVISIONS

P LTR

DESCRIPTION

DATE

DWN

APVD

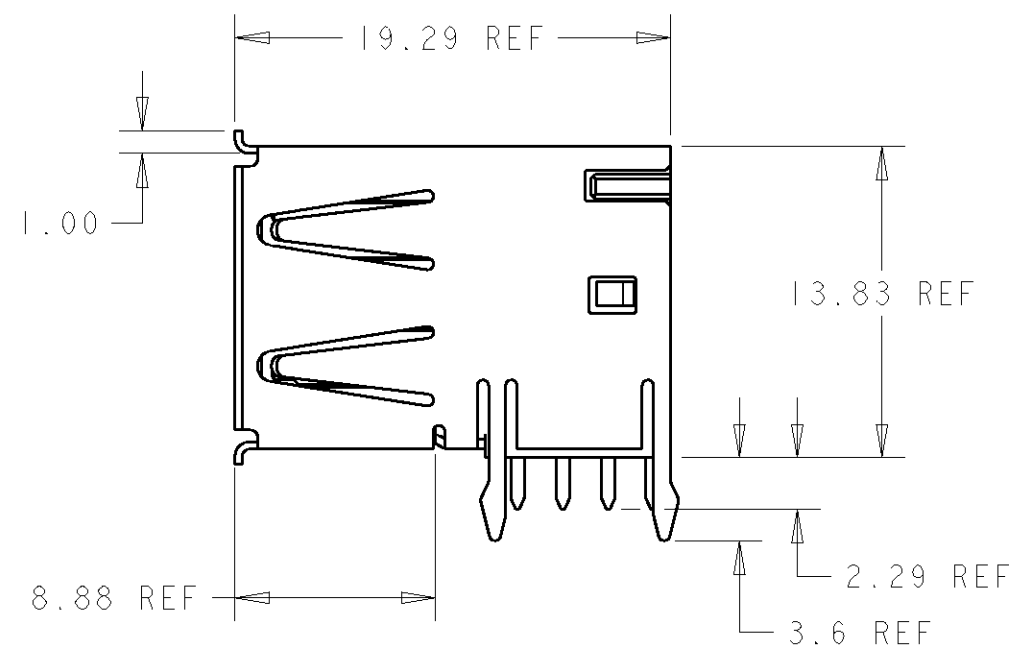
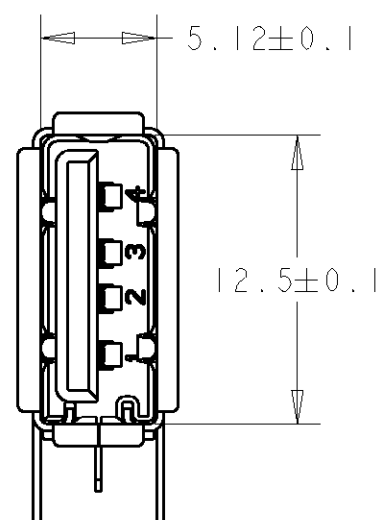
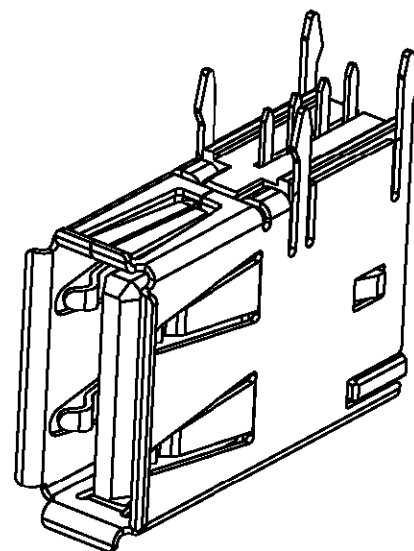
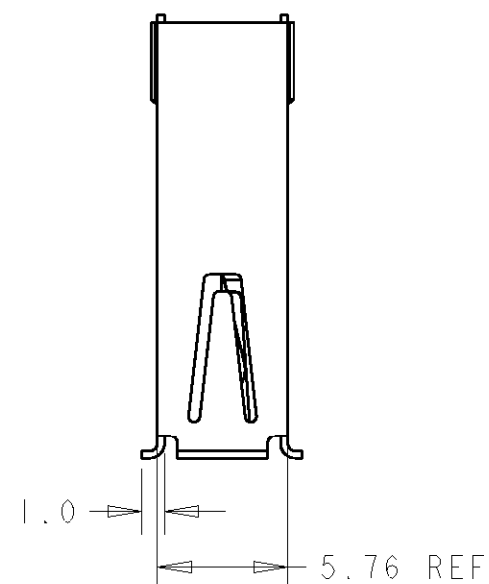
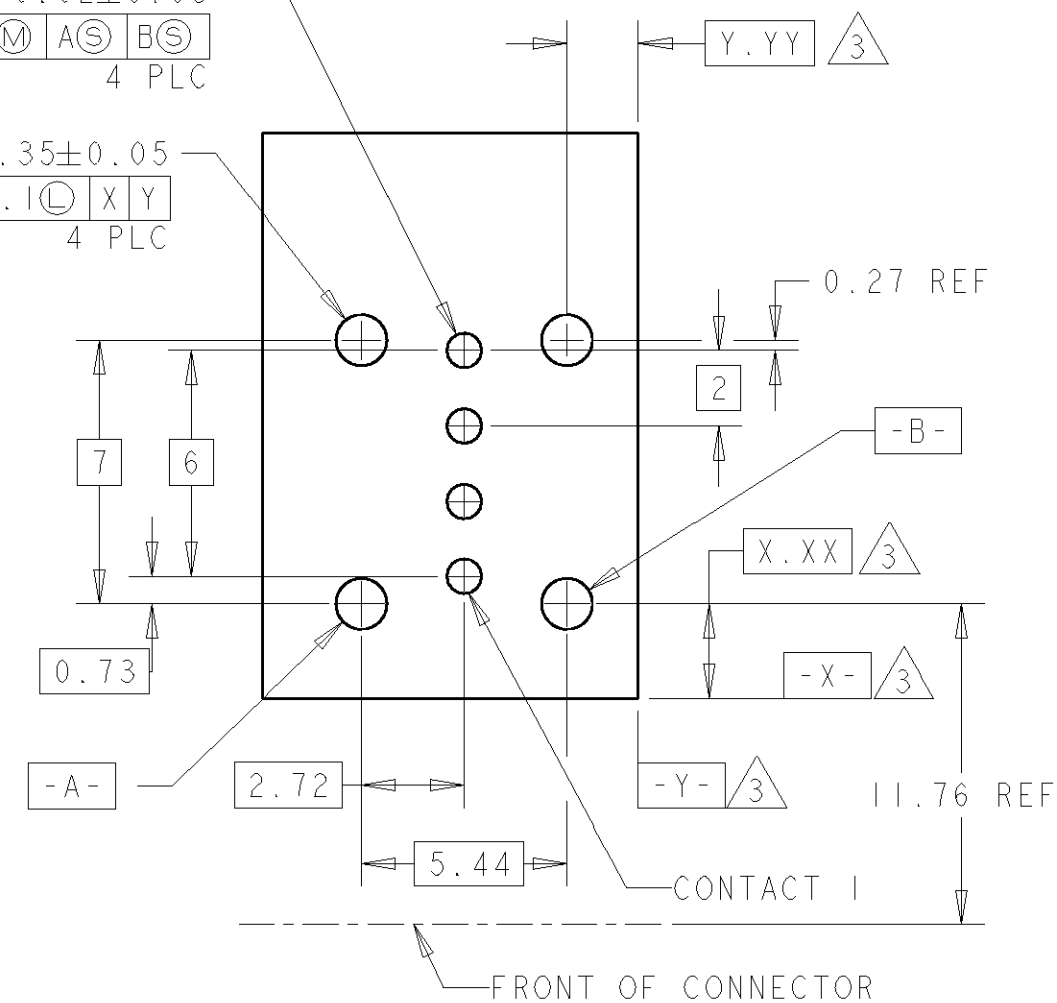
C1

REVISED PER ECO-11-005294

11APR11

RK

HMR

 $\varnothing 0.92 \pm 0.08$
 $\varnothing 0.1 \text{ (M)} \text{ A (S)} \text{ B (S)}$
4 PLC $\varnothing 1.35 \pm 0.05$
 $\varnothing 0.1 \text{ (L)} \text{ X (Y)}$
4 PLC

PC BOARD MOUNTING DIMENSIONS 4

1

MATERIAL:
CONTACTS- PHOSPHOR BRONZE.
SHELL- COPPER ALLOY.

2

PLATING:
CONTACTS- 0.076µm MINIMUM GOLD OVER 0.76µm MINIMUM
PALLADIUM-NICKEL ON MATING AREA, 3.8µm MINIMUM TIN-LEAD
ON SOLDER TAILS, BOTH OVER 1.27µm MINIMUM NICKEL.
SHELL- 5µm MINIMUM BRIGHT TIN.
CONTACT ALTERNATE PLATING: 0.76µm MINIMUM GOLD ON
MATING AREA.

3

DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.

4

RECOMMENDED PC BOARD THICKNESS OF 1.57±0.18.

5

HOUSING- UL 94V-O RATED THERMOPLASTIC, NATURAL.

6

HOUSING- UL 94V-O RATED, THERMOPLASTIC, BLACK.

1 5

440260-2

1 6

440260-1

MATERIAL

PART NUMBER

DWN 28FEB2003

CHK J.Reitzel 28FEB2003

APVD J.GERACE 28FEB2003

M.WALMSLEY

PRODUCT SPEC

APPLICATION SPEC

WEIGHT -

CUSTOMER DRAWING

TE

TE Connectivity

NAME
RECEPTACLE ASSEMBLY.
RIGHT ANGLE FLAG, 4 POSITION,
THRU-HOLE, USB

SIZE CAGE CODE DRAWING NO RESTRICTED TO

A3 00779 C=440260 -

SCALE 5:1 SHEET 1 OF 1 REV C1