



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	H	REVISED PER ECR-24-213591	28JUN2024	RK	FJS



ACCOMODATES
1.57 DIA PIN
[.062]

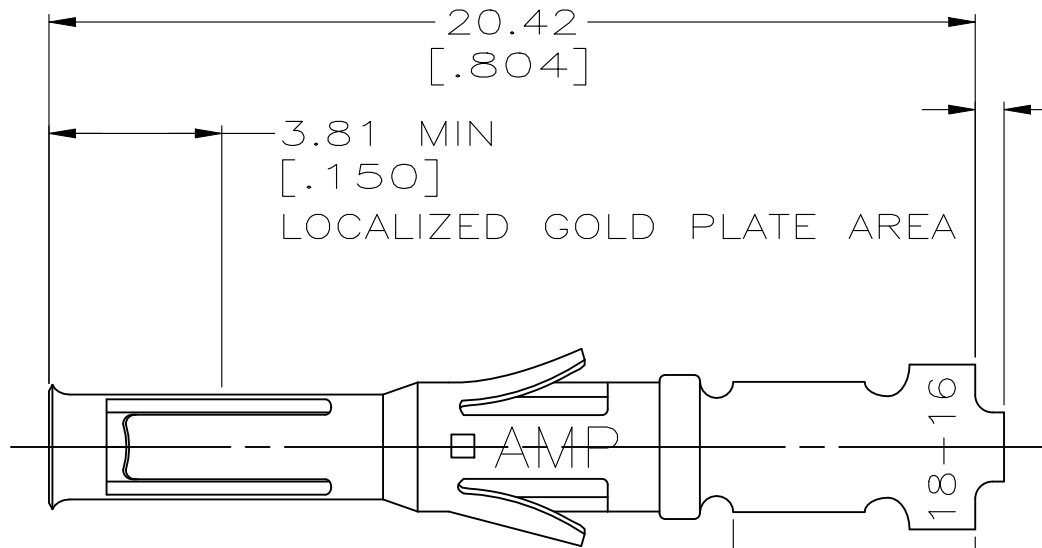

LOCALIZED TIN-LEAD,
OR TIN, PLATE AREA

1. WIRE RANGE 18-16 AWG.
2. INSULATION RANGE 2.03-2.54[.080-.100] DIA.
3. 0.76µm [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA,
1.27µm [.000050] MIN TIN-LEAD IN LOCALIZED TIN-LEAD PLATE AREA,
BOTH OVER 1.27µm [.000050] MIN NICKEL.
4. TIN PLATED.
5. GOLD PLATING PER MIL-G-45204, TIN PER MIL-T-10727
AND NICKEL PER QQ-N-290.
6. 0.76µm [.000030] MIN PRECIOUS METAL PLATE IN LOCALIZED GOLD PLATE AREA,
1.27µm [.000050] MIN TIN IN LOCALIZED TIN PLATE AREA,
BOTH OVER 1.27µm [.000050] MIN NICKEL.
CONFORMS TO THE REQUIREMENTS OF TE PRODUCT SPEC 108-10042,
BASED ON EIA-364-1000.01 (CONTROLLED ENVIRONMENT APPLICATIONS).

66580-7	6	66590-4
66580-4	3	66590-2
66580-2	4	66590-1
STRIP REF	FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D.HARDY 06/15/94	TE Connectivity			
		CHK R.STONE 06/22/94				
		APVD G.STEINHAUER 06/27/94	NAME			
DIMENSIONS: mm [INCHES]		PRODUCT SPEC	CONTACT, SOCKET, LOOSE PIECE, TYPE VI, MULTIMATE			
		APPLICATION SPEC				
		WEIGHT	SIZE A3	CAGE CODE 00779	DRAWING NO C-66590	RESTRICTED TO
MATERIAL BRS PER MIL-C-50		FINISH 5 SEE TABLE	CUSTOMER DRAWING			
			SCALE 6:1	SHEET 1 OF 1	REV H	