


4

3


2

1

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AF	50		S2	REV PER ECR-25-256719	26-09-25	AG	BW

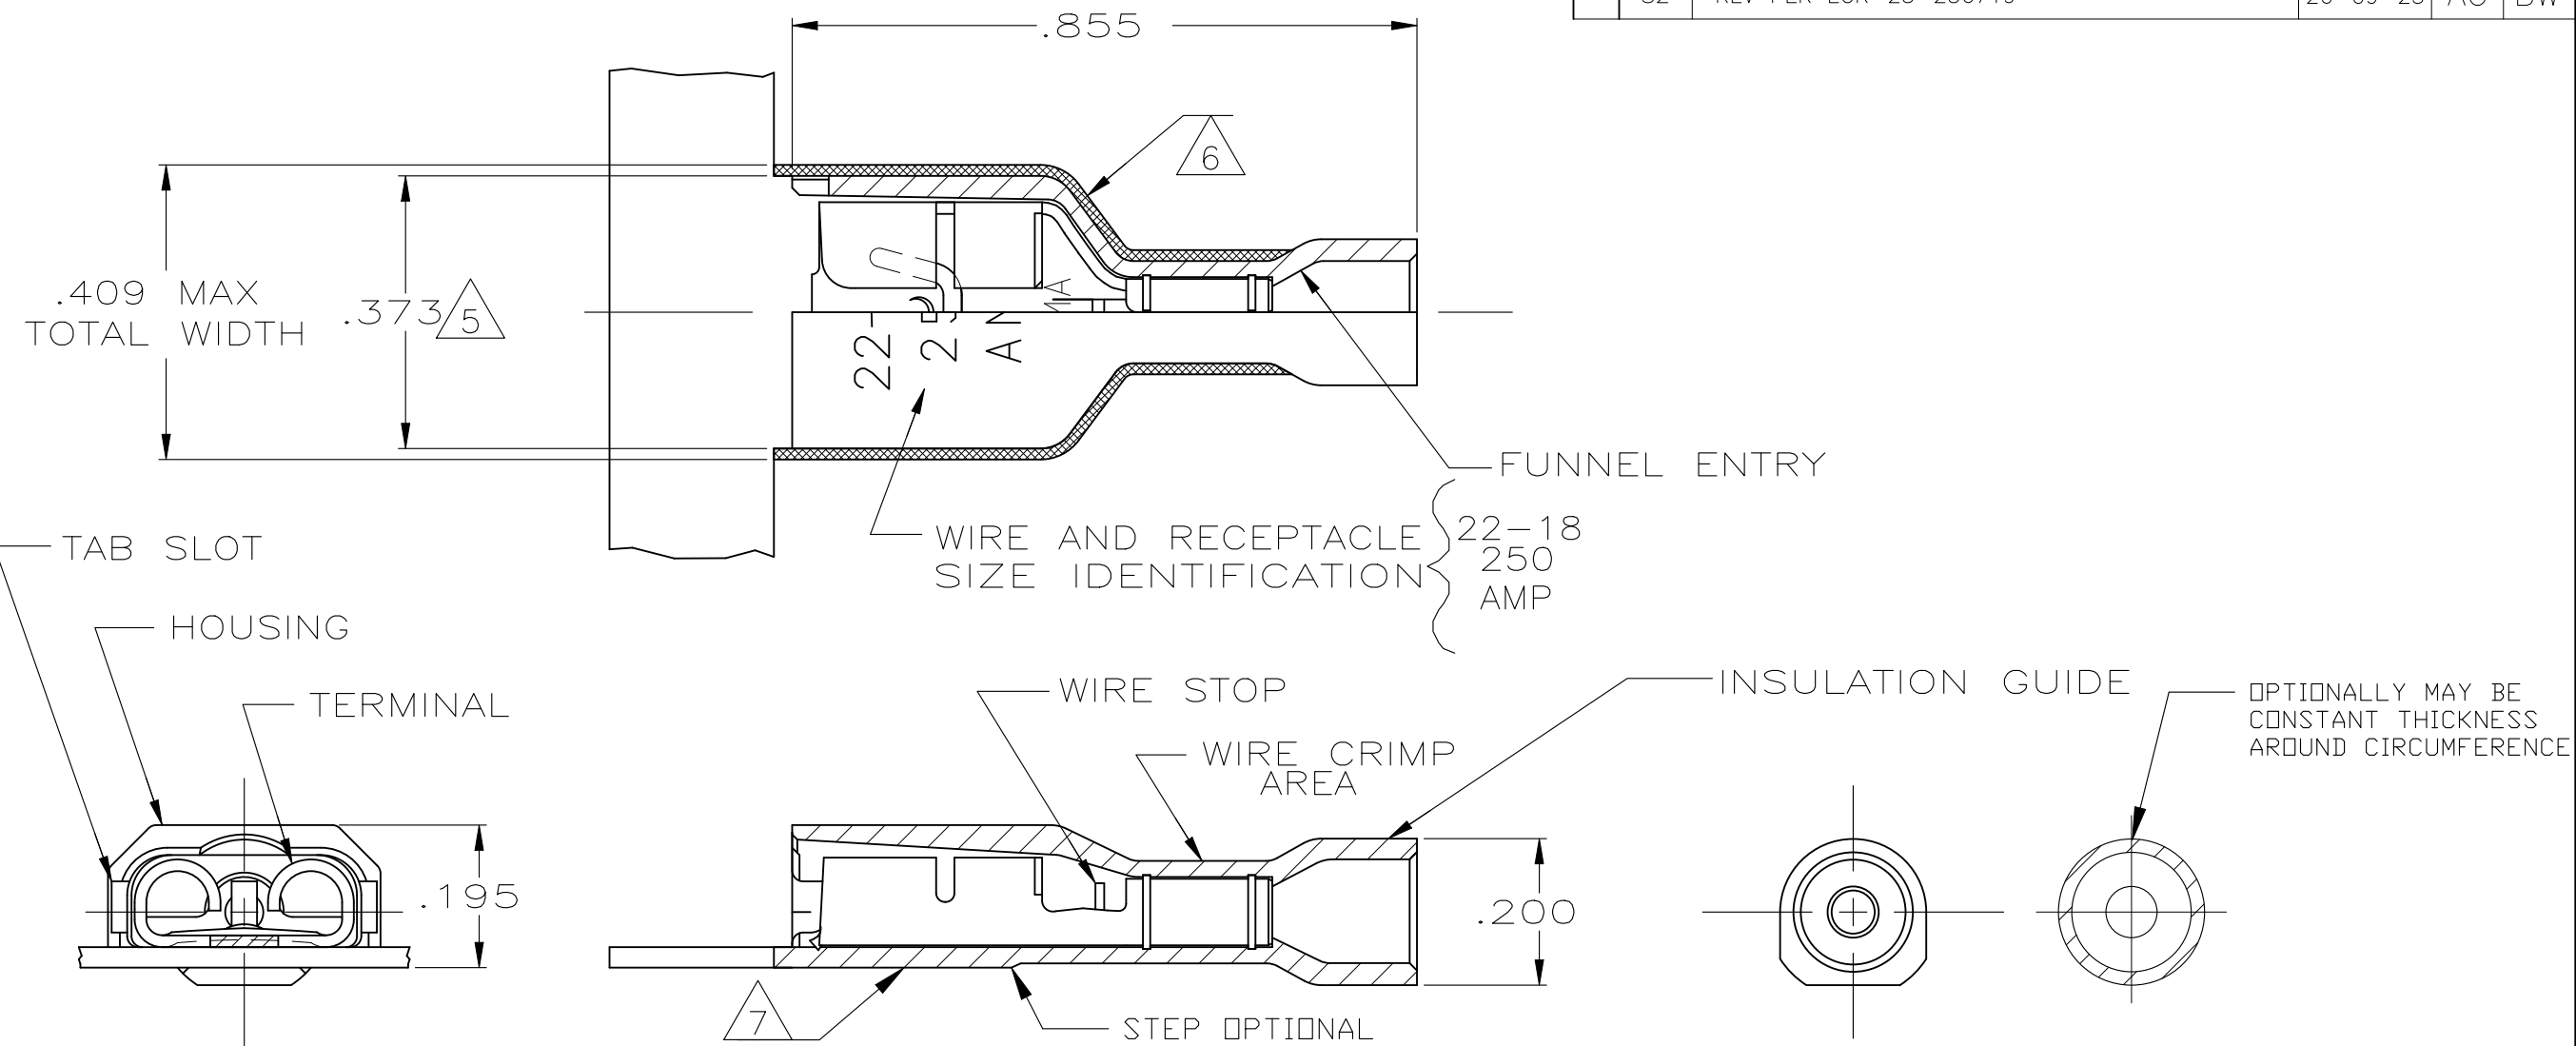

- 1 MATES WITH .032±.001x.250 TAB
- 2 WIRE STRIP LENGTH .281
- 3 INSULATION SIZE .135 MAX DIA
- 4 CONTINUOUS STRIP ON REELS
- 5 DIMENSION DOES NOT INCLUDE TRIM BURR
- 6 .015 MAX CARRIER TRIM BURR PER SIDE IS ALLOWABLE IN THE SHADED AREA
- 7 MOLD GATE LOCATED IN THIS AREA. GATE AREA MAY BE DISCOLORED WITH A SLIGHT DIMPLE.

STANDARD		HOUSING:NYLON,COLOR-BLACK TRANSLUCENT RECEPTACLE:BRASS, TIN			9-520183-2				
BULK		HOUSING:NYLON,COLOR-RED TRANSLUCENT RECEPTACLE:BRASS, TIN			5-520183-2				
STANDARD		HOUSING:NYLON,COLOR-RED TRANSLUCENT RECEPTACLE:#3 HARD PH BRONZE, TIN			2-520183-4				
		HOUSING:NYLON,COLOR-RED TRANSLUCENT RECEPTACLE:BRASS, TIN			2-520183-2				
PACKAGING		MATERIAL & FINISH			PART NO				
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN P FORTNEY 10/18/88 CHK JR RUTH 10/18/88 APVD K RANDOLPH 10/21/88		TE Connectivity NAME RECEPTACLE ASSY,ULTRA-FAST, .250 SERIES,22-18 AWG -					
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .015 4 PLC ± - ANGLES ± -							
		PRODUCT SPEC 108-2043 APPLICATION SPEC 114-2123 WEIGHT -		SIZE A3 CAGE CODE 00779 DRAWING NO C-520183		RESTRICTED TO -			
MATERIAL SEE TABLE		FINISH SEE TABLE		CUSTOMER DRAWING			SCALE 4:1	SHEET 1 OF 1	REV S2