


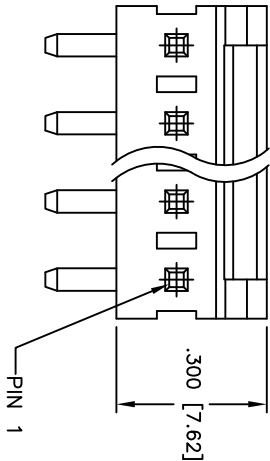


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/18/10	
A		ECN	12/8/10	
B		REVISED DIM.	2/17/14	AY/MY

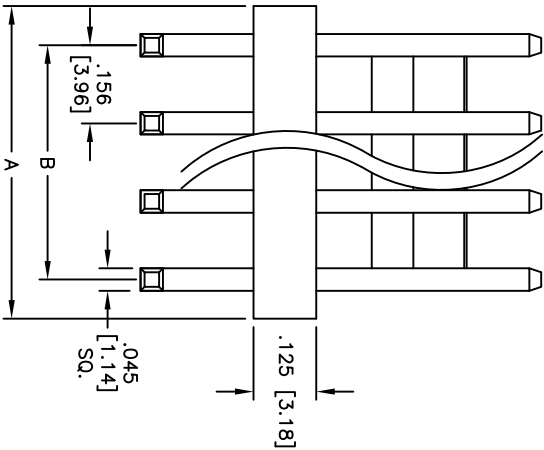

RECOMMENDED PCB LAYOUT

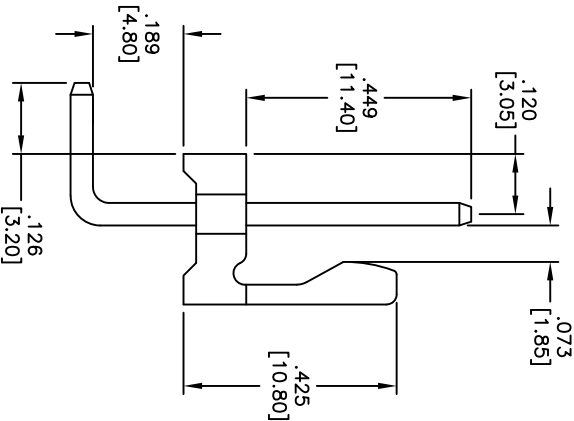

SPECIFICATIONS:

Material: Insulator: PA66, glass reinforced, rated UL 94V-2
Insulator color: White
contact: Brass, Tin or Ni plated
Electrical: Current rating: 7 Amps max
Contact resistance: 20mohms max
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating: Operating temperature: -40°C to +85°C
Environmental: Lead free, RoHS compliant

Positions: 2 thru 20
A = .156 [3.96] x No. of Positions
B = .156 [3.96] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				ADAM TECH 909 Railway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710			
INCHES				TITLE			
Holes				.156 [3.96] HEADER, RIGHT ANGLE			
.X ± .10				SIZE			
.XX ± .020				X			
.XXX ± .015				PART NO.			
.XXX ± .010				LHD-XX-TRA			
APPROVALS				SCALE: NTS			
DATE				SHEET 1 OF 1			
DRAWN				REV. B			
DY							
CHECKED							
APPROVED							
6/18/10							
REF: S00019C							