
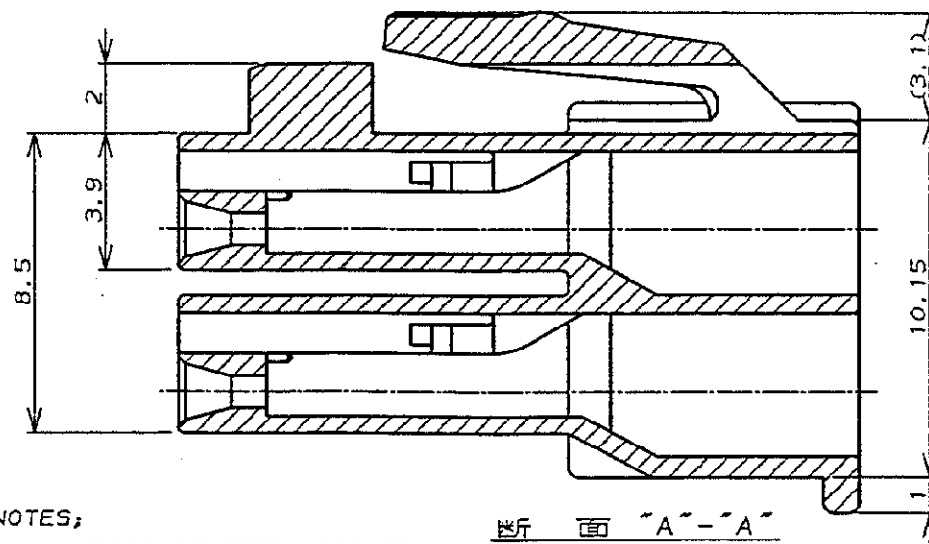
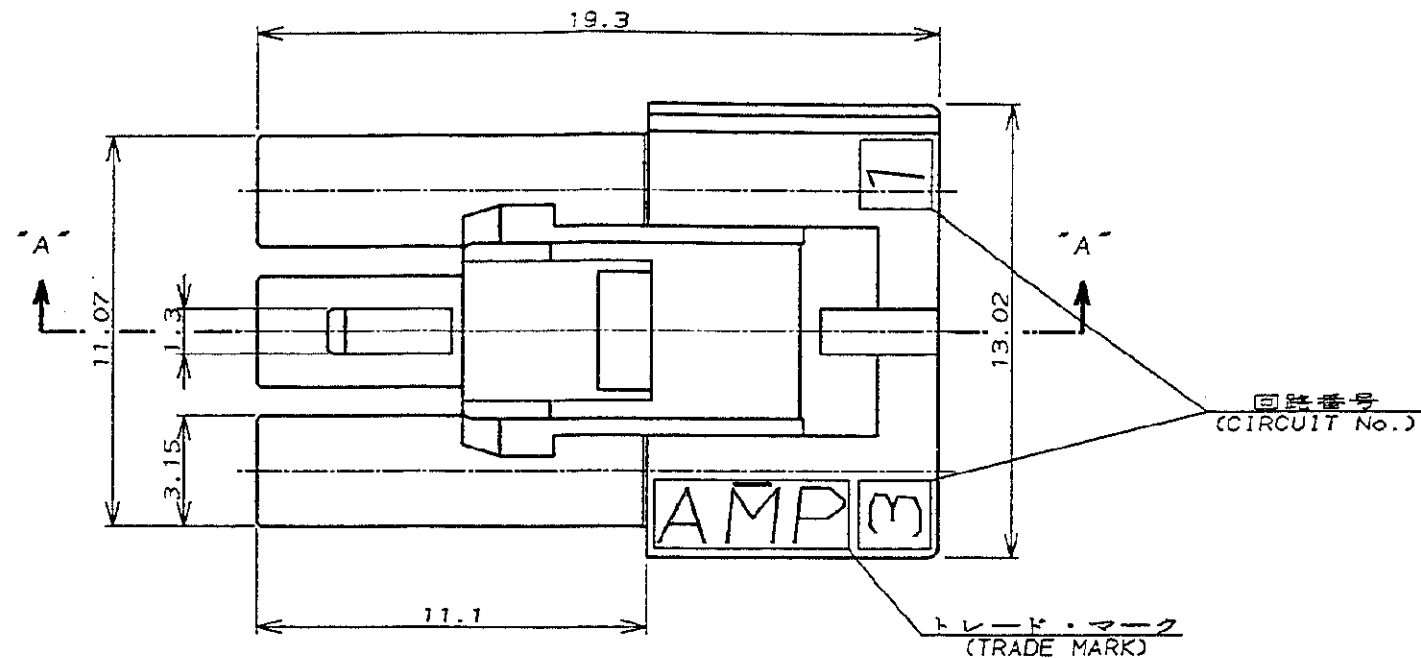


NUMBER
C-176274METRIC
三角板 (3-d ANGLE PROJECTION)

METRIC

PRINT DIST
単位, 寸法 DIMENSIONS IN MM. DO NOT SCALE PRINT

PRINT DIST

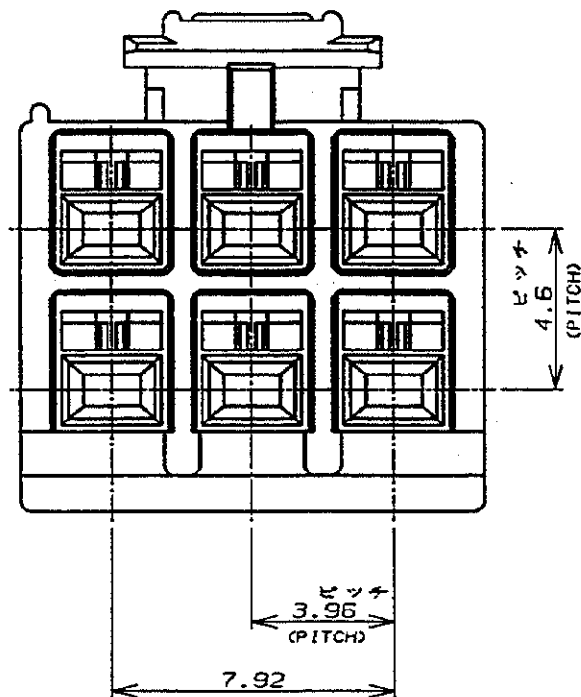


NOTES:

- PRODUCT SPEC.: 108-5302
REC CONTACT: 175152-□ (20-16AWG)
175151-□ (26-22AWG)
- MATING CONN. P/N
CAP HSG: 176285-□ (FREE HANGING)
176295-□ (PANEL MOUNT)
TAB CONTACT: 175150-□ (20-16AWG)
175149-□ (26-22AWG)

- INSTRUCTION SHEET: IS-503J
- APPLICATION SPEC: 114-5142

注:

- 通用製品規格: 108-5302
- 通用コンタクト型番
リセ・コンタクト: 175152-□ (20-16AWG)
175151-□ (26-22AWG)
- 嵌合相手側製品型番
キャップ・ハウジング: 176285-□ (宙吊りタイプ)
176295-□ (パネル取付タイプ)
タブ・コンタクト: 175150-□ (20-16AWG)
175149-□ (26-22AWG)
- 取扱説明書: IS-503J

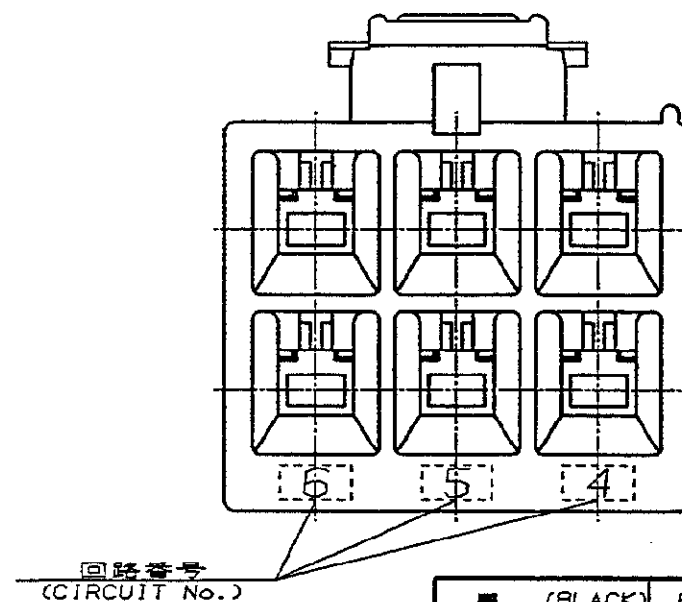

黒 (BLACK)	6	176274-9
青 (BLUE)	↑	↑ -6
黄 (YELLOW)	↑	↑ -4
赤 (RED)	↓	↓ -2
自然色 (NATURAL)	6	176274-1
ハウジング色調 (HOUSING COLOR)	極数 (Pos.)	型番 (P/N)

C				REVISED PER ECR-19-017623				M.G.	D.Z.	20AUG 2021
B1				REVISED PER ECO-11-005924				RK	HMR	08APR11
LTR				変更 (REVISION RECORD)				DR	CHK	DATE
DR.				M. SHINDO				'89	11/8	'89
CHK.				Y. FUJITA				'89	11/8	'89
DE.				M. SHINDO				'89	11/8	'89
APP.				N. ONOUE				'89	11/8	'89

組合電線断面積 (WIRE RANGE)		被覆外径 (INSULATION DIA.)		名称 (NAME)	
mm ² (AWG)		mmφ		AMPユニバーサルパワーコネクタ 6極	
6/6 ナイロン (UL94V-0)		6/6 NYLON (UL94V-0)		3.96mmピッチ プラグハウジング (2列タイプ)	
6/6 ナイロン (UL94V-0)		6/6 NYLON (UL94V-0)		AMP UNIVERSAL POWER CONN. 3.96mm PITCH PLUG HOUSING 6 Pos (DBL ROW)	
一般公差		公差 (TOLERANCE)		公差 (TOLERANCE)	
10mm以下: ±0.2		10mm以下: ±0.2		10mm以下: ±0.2	
10mm以上 30mm以下: ±0.25		10mm以上 30mm以下: ±0.25		10mm以上 30mm以下: ±0.25	
30mm以上 100mm以下: ±0.3		30mm以上 100mm以下: ±0.3		30mm以上 100mm以下: ±0.3	
角 度: ±3°		角 度: ±3°		角 度: ±3°	

SIZE	LOC	番号 (No.)
A3	J	C-176274
尺度 (SCALE)	REV.	SHEET
1:1	C	1 OF 1

(CUSTOMER DRAWING) 参 考 図 面