

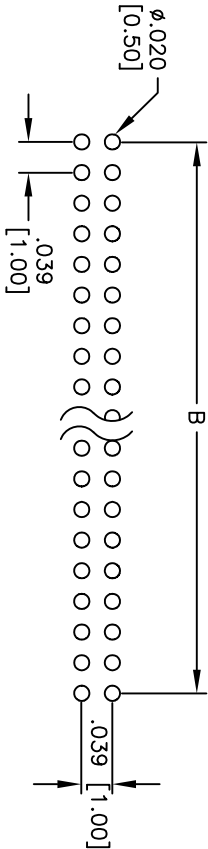
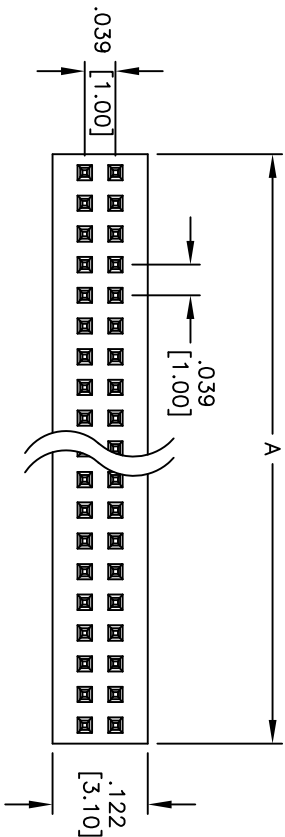


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/5/05	
A		REDRAWN	12/9/14	AY/LL



RECOMMENDED PCB LAYOUT

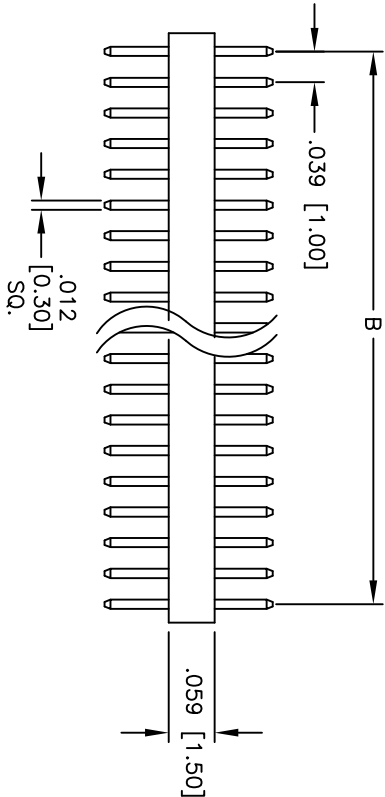

Positions: 04 thru 80
A = .039 [1.00] x No. of Positions Per Row
B = .039 [1.00] x No. of Spaces

PART NUMBER	PLATING
MPH2-XX-U	GOLD FLASH OVER NICKEL UNDERPLATE
MPH2-XX-SG	GOLD FLASH OVER NICKEL UNDERPLATE ON CONTACT AREA, TIN OVER COPPER ON TAILS
MPH2-XX-T	TIN OVER COPPER UNDERPLATE OVERALL

ADAM TECH

909 Railway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

SPECIFICATIONS:
Material:
Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Plating:
See chart.
Electrical:
Current rating: 1 Amp max.
Contact resistance: 15 mohms max. initial
Insulation resistance: 5,000 Mohms min.
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES		TITLE	
.X ± .10	ØXX ± .10	.039 [1.00] DUAL ROW MICRO PIN HEADER	
.XX ± .020	ØXX ± .015	909 Railway Avenue, Union, NJ 07083	
.XXX ± .015	ØXXX ± .010	Phone: 908-687-5000 Fax: 908-687-5710	
APPROVALS	DATE	REV. A	
DRAWN	SS	1/5/05	
CHECKED		MPH2-XX-XX	
APPROVED		SCALE: NTS	
REF: S00039T		SHEET 1 OF 1	