

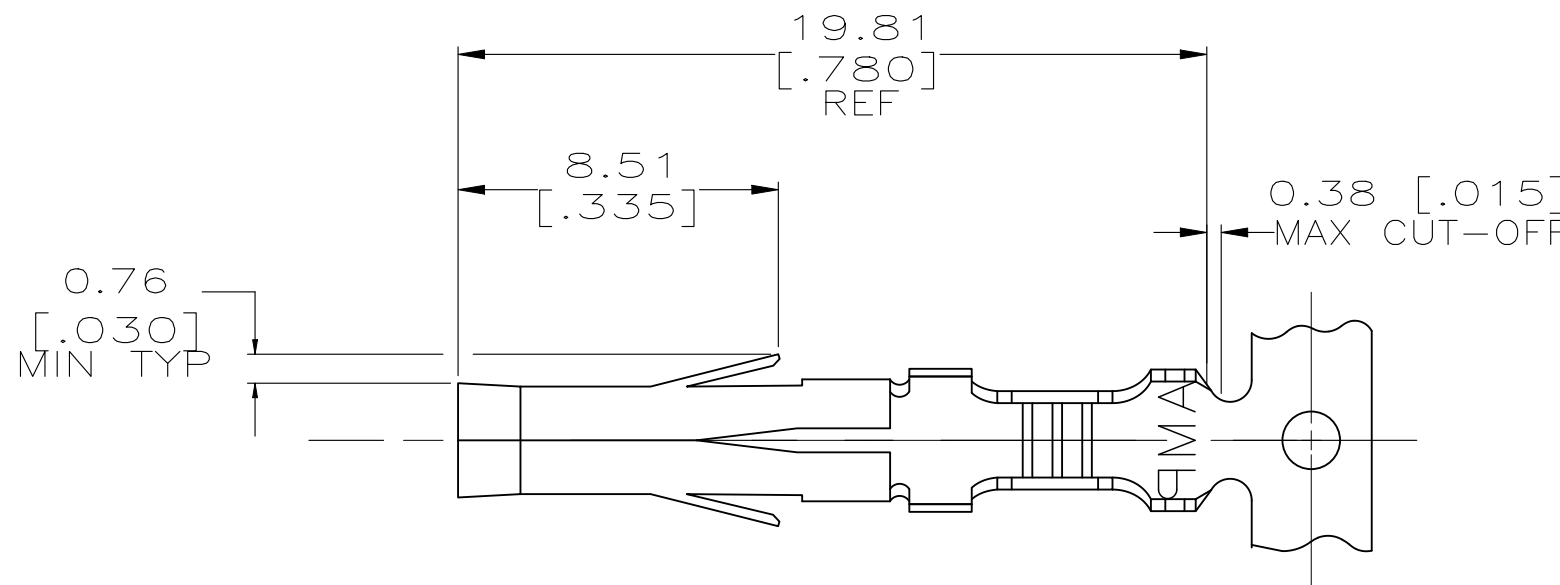
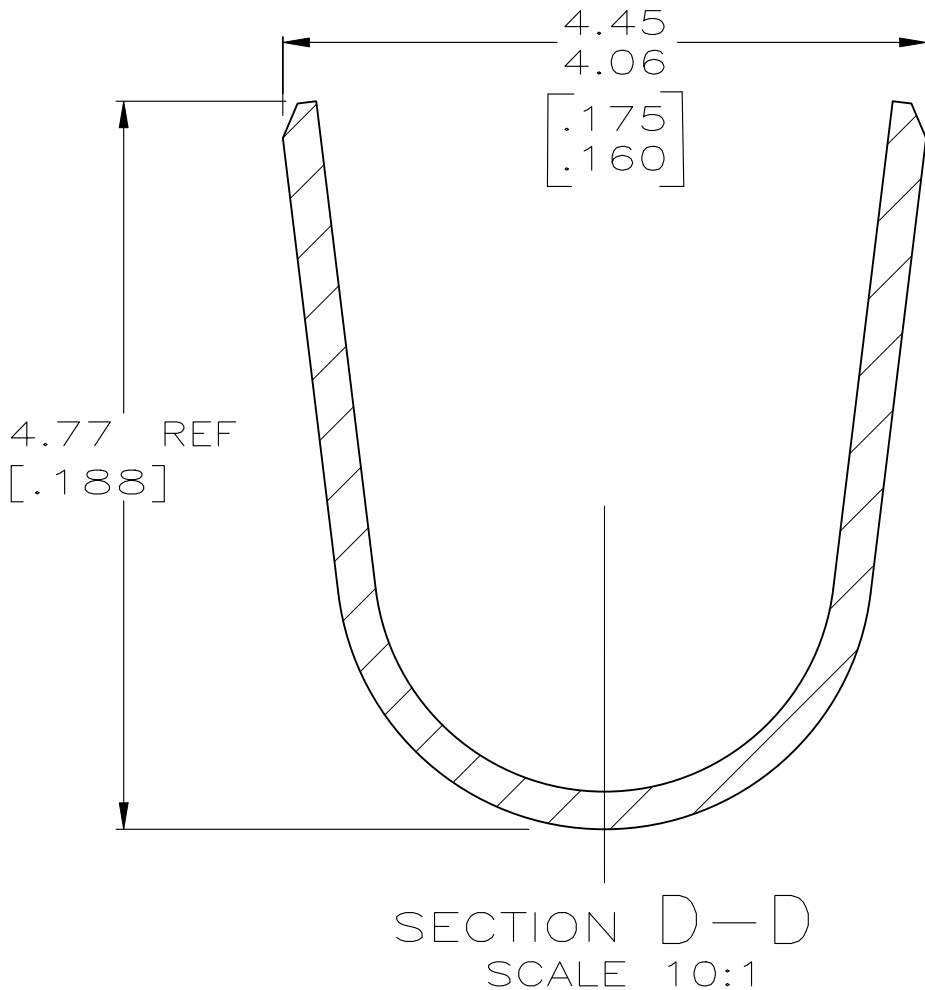
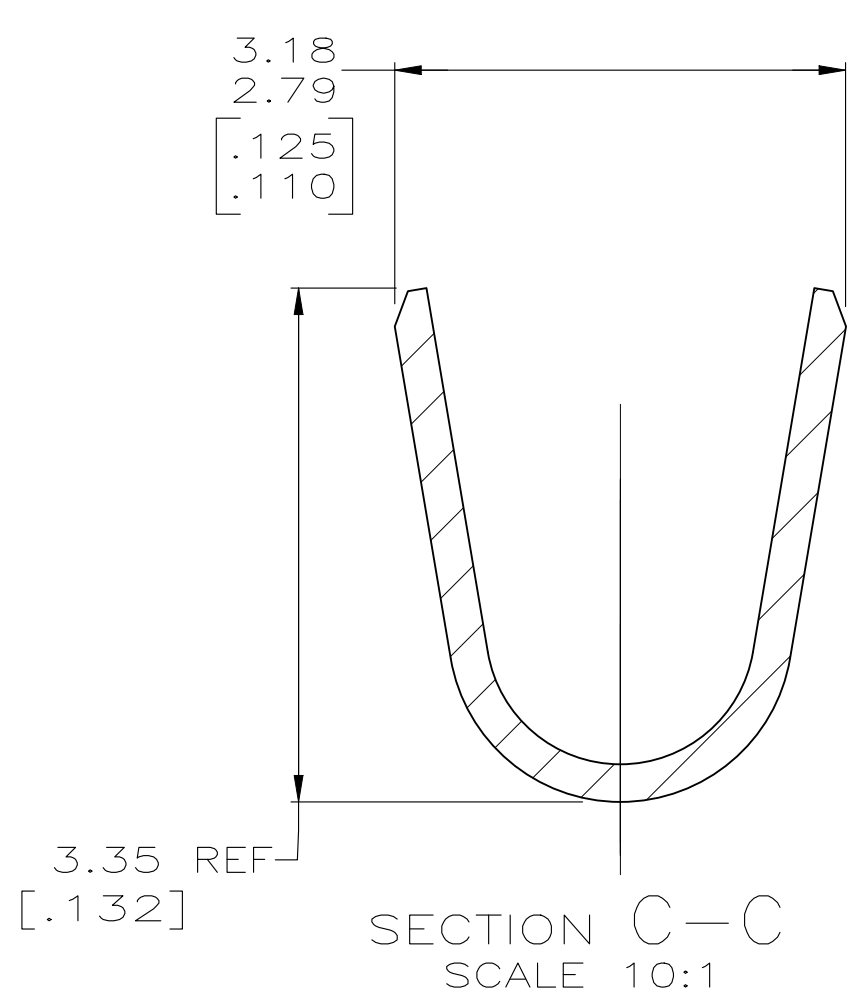
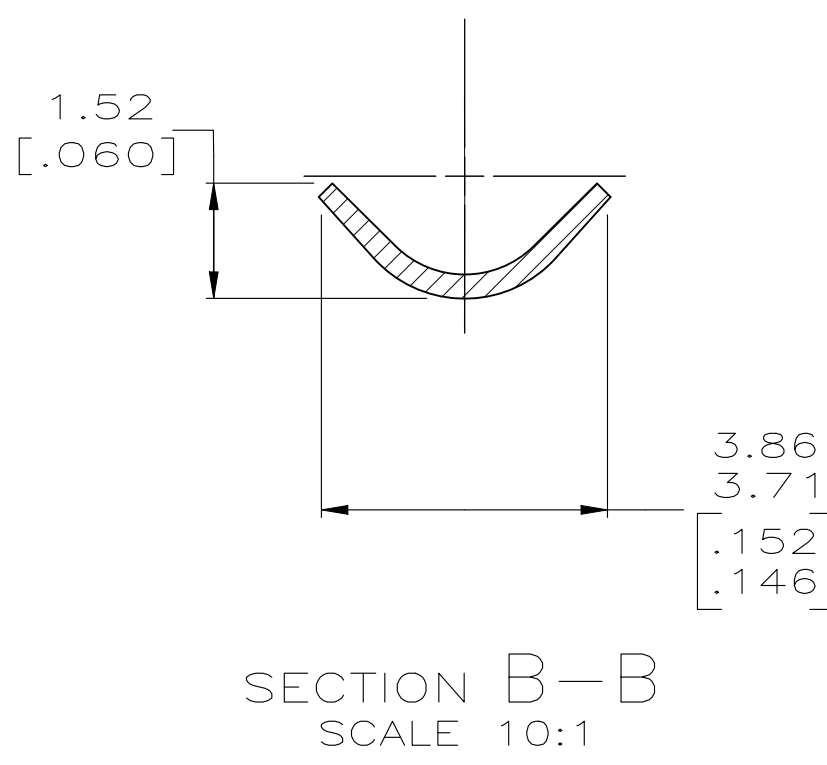
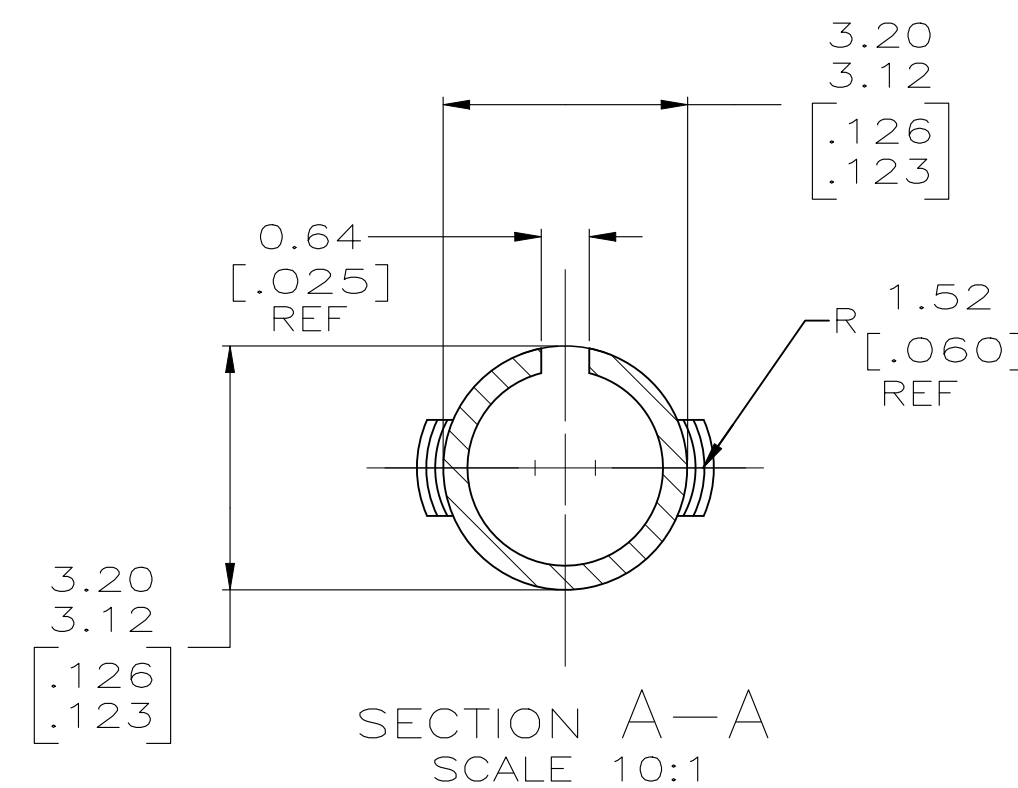


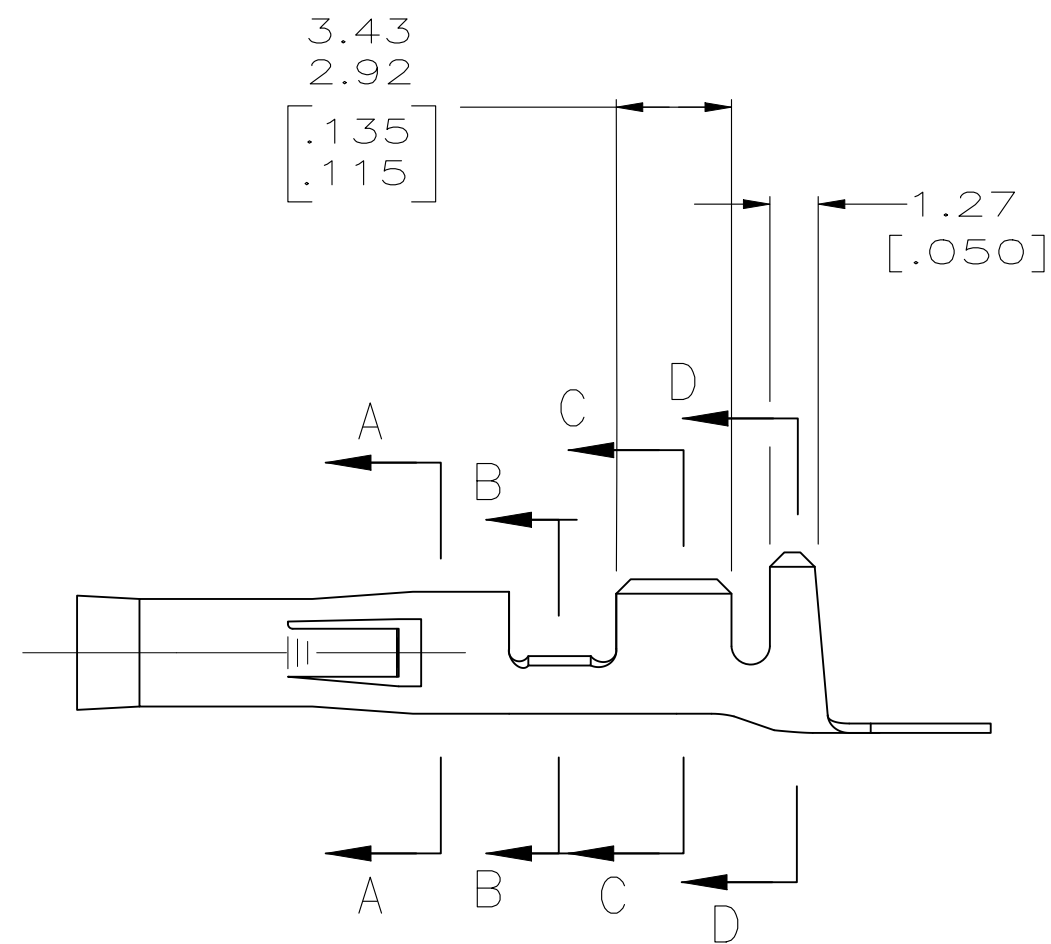

- 1 WIRE RANGE: 0.5-2mm² (20-14 AWG).
- 2 INSULATION RANGE: 3.56 [.140] MAX. DIA.
- 3 DIMENSIONS IN BRACKETS ARE IN INCHES.
- 4

0.00076 [.000030] MIN GOLD STRIPE OVER 0.00127 [.000050] MIN NICKEL ON INSIDE OF SOCKET.
- 5

.00127 [.000050] MIN NICKEL

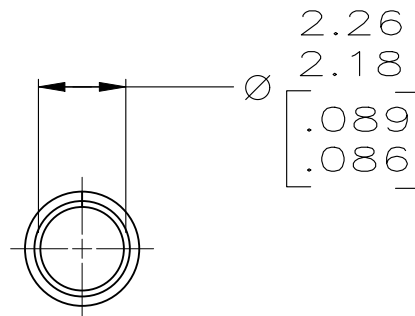

PRELIMINARY PART NUMBER NOT IN PRODUCTION	5	0.25 [.010] PHOS BRZ	350415-8
	PRE-TIN	0.25 [.010] PHOS BRZ	350415-6
OBSOLETE	4	0.25 [.010] BRASS	350415-5
	PRE-TIN	0.25 [.010] BRASS	350415-1
	FINISH	MATERIAL	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 22NOV2005	TE Connectivity	
		CHK D. COLEY 22NOV2005		
DIMENSIONS: mm (INCHES)	TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME .093 SOCKET COMMERICAL PIN AND SOCKET	
	0. PLC ± -		PRODUCT SPEC	
	1. PLC ± -		APPLICATION SPEC	
MATERIAL SEE TABLE	2. PLC ± -		SIZE A1	
	3. PLC ± 0.13 [.005]		CAGE CODE 00779	
	4. PLC ± -		DRAWING NO 350415	
	ANGLES ± 0°30'		RESTRICTED TO -	
FINISH SEE TABLE		WEIGHT 0.000000	REV AL3	
CUSTOMER DRAWING		SCALE 5:1	SHEET 1 OF 1	