

6

5

4

3








2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/7/05	
A		REVISED INSULATOR MATERIAL	10/25/11	
B		REVISED SPEC.	11/20/12	
C		UPDATE DRAWING	3/24/21	LH/LW

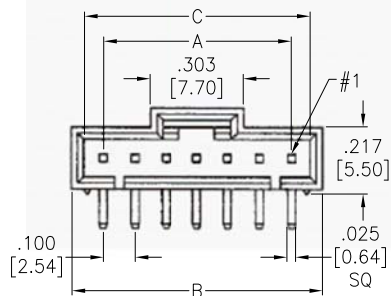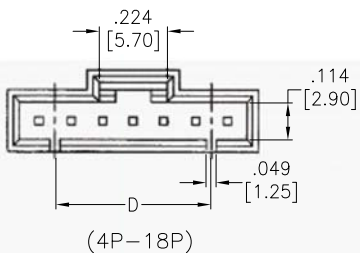

SPECIFICATIONS:

Material:
 Insulator: PBT, glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Plating:
 Tin over Copper underplate overall
 Electrical:
 Operating voltage: 250 V AC/DC
 Current rating: 2.5 A AC/DC
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 600 VAC for 1 minute
 Temperature Rating:
 -25°C to +85°C
 Environmental:
 Lead free, RoHS compliant



Positions: 2 thru 18

- A = .100 [2.54] x No. of Spaces
- B = .100 [2.54] x No. of Positions + .100 [2.54]
- C = .100 [2.54] x No. of Positions + .025 [0.64]
- D = (4P-18P) .100 [2.54] x No. of Positions - .200 [5.08]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLES

.X ± .10	∅.X ± .10
.XX ± .020	∅.XX ± .015
.XXX ± .015	∅.XXX ± .010



909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

APPROVALS		DATE
DRAWN	SS	4/7/05
CHECKED		
APPROVED		

TITLE .100 [2.54] LATCHING HEADER RIGHT ANGLE, PCB		
SIZE X	PART NO. CDR-XX-TR	REV. C
REF: S00016T	SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1