

PRODUCT NUMBER

73398-YXXXLF

RoHS COMPATIBLE, SEE NOTE 6
 PACKAGING OPTIONS, SEE NOTE 3
 (MAY BE SUBJECT TO TOOLING FEES)

EXTENDED RANGE

- TOOLING FEASIBILITY CONFIRMED
- SAMPLES ON DEMAND
- AVAILABILITY ON DEMAND

PIN STYLE
 (AS AVAILABLE)

PLATING
 (AS AVAILABLE)

1= 0.76µm GOLD/GXT ON CONTACT
 AREA, 2µm TIN MIN ON TAILS

4= 2.0µm TIN MIN FULL PLATED




8= 0.38µm GOLD/GXT ON CONTACT
 AREA, 2µm TIN MIN ON TAILS

1.27µm NICKEL MIN UNDERLAYER FOR
 ALL PLATING VERSIONS

NOTES:

- HOUSING MATERIAL : HIGH TEMPERATURE THERMOPLASTIC. UL94V-0 COLOR: BLACK
- PIN MATERIAL : PHOSPHOR BRONZE
- PACKAGING OPTIONS:
 = POLY BAGS
 B = TUBE + CAP / ONLY AVAILABLE UPON REQUEST
 A = TAPE & REEL WITH CAP, AS AVAILABLE
 TR = CUSTOM TAPE & REEL WITH CAP, ONLY FOR PIN STYLE 01
 PRODUCT 180° ROTATED VERSUS PACKAGING "A"
- 9N MIN RETENTION IN EITHER DIRECTION
- TO DETERMINE DIMENSIONS :
 N = NUMBER OF POSITIONS PER ROW
 EXAMPLE : 8 POS N x 2.54 = 20.32mm
- RoHS COMPATIBLE PRODUCT SPECIFICATIONS
 - PLATING:
 - "LF" MEANS THE PRODUCT IS LEAD-FREE, 2µm MINIMUM MATTE TIN OVER 1.27µm MINIMUM NICKEL UNDERPLATE.
 - MANUFACTURING PROCESS COMPATIBILITY
 - THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 30 SECONDES IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.
 - LABELING:
 - MEETS PACKAGING SPECS AS PER GS-14-920
 - LEGAL STATEMENT: SEE GS-47-0004
- THIS PART SERIES IS NOT INITIALLY INTENDED FOR AUTOMOTIVE APPLICATIONS. ADDITIONAL FEES ARE CHARGEABLE FOR ANY ADDITIONAL QUALIFICATION AND TEST REPORTS PERFORMED OUTSIDE THE SCOPE OF THE STANDARD PRODUCT SPECIFICATIONS.
- UNLESS OTHERWISE APPROVED BY AMPHENOL, ALL PARTS AND COMPONENTS ARE DESIGNED & BUILT ACCORDING TO AMPHENOL'S SPECIFICATIONS WHICH ARE SUBJECT TO CHANGE WITHOUT NOTICE.

STYLE	SIZE	DIM"A"	OMIT PINS
01	2x05	5.84	A5
02	2x03	5.84	B2
03	2x04	5.84	B1
04	2x11	8.38	A6
05	2x20	8.38	B10
06	2x05	8.38	A5
07	2x08	5.84	B7
08	2x04	5.84	B4
09	2x20	5.84	A11
10	2x07	5.84	A4-B7
11	2x13	5.84	A3-B1
12	2x12	5.84	A2
13	2x05	5.84	B5
14	2x05	5.84	B4
15	2x03	5.84	A2-B2
16	2x03	16.40	A2
17	2x05	5.84	A4
18	2x05	5.84	A2,3,4 B2,3,4
19	2x04	8.08	B2

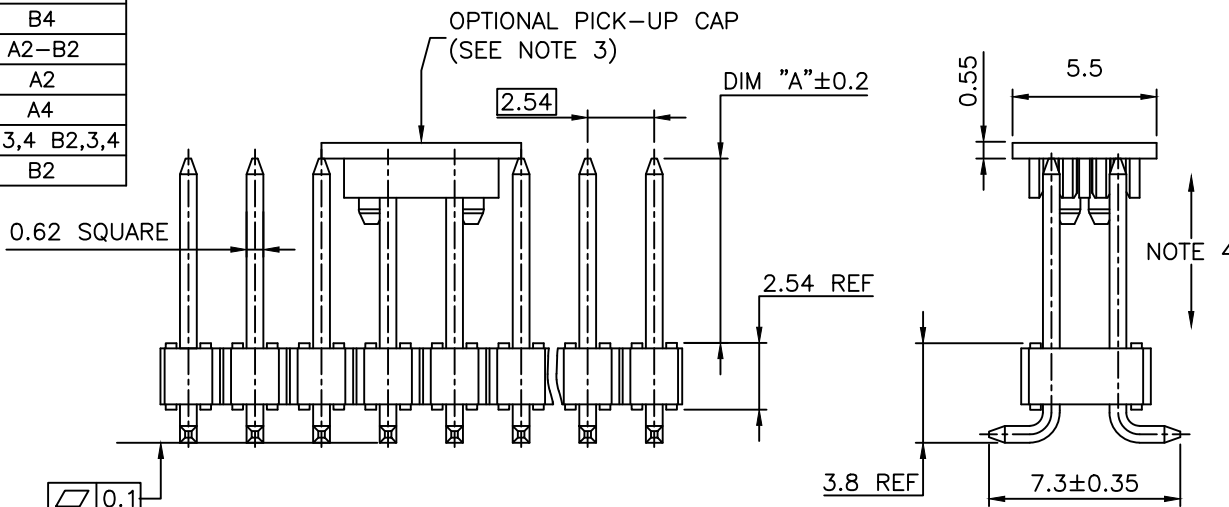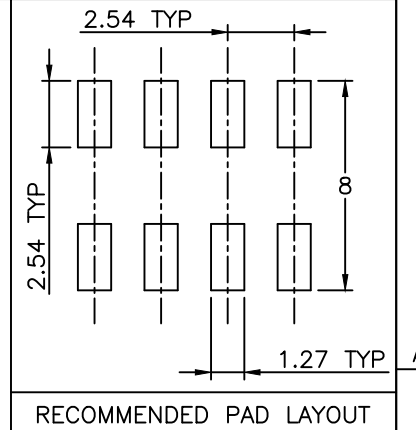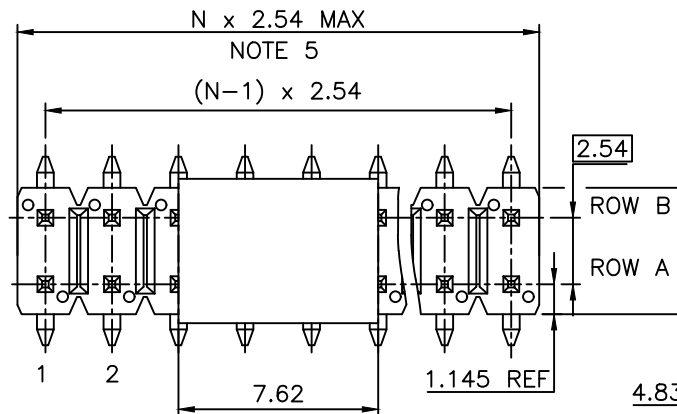

mat'l. code		surface		tolerance		projection		product family	
		ISO 1302		ISO 406 ISO 1101		mm		HEADER	
ltr		ecn no		dr		date		title	
Y		F-47086		DDE		23.01.20		HEADER DR	
AA		F-47114		DDE		23.01.25		DUPLX SMT POLARIZED	
AB		F-55070		DDE		25.03.20		dwg no sheet 1 of 1 size	
				dr		L.MULIN 99.04.12		73398 A3	
V		F-28256		LMU		17.10.25 engr J.COMPAGNON 99.04.12		Amphenol FCI	
W		F-31154		DDE		18.09.04 chr		type CUSTOMER Drawing	
X		F-46844		DDE		22.12.21 appd J.COMPAGNON 99.04.12			
sheet		revision							
index		sheet							