


DRAWING MADE IN AMERICAN PROJECTION

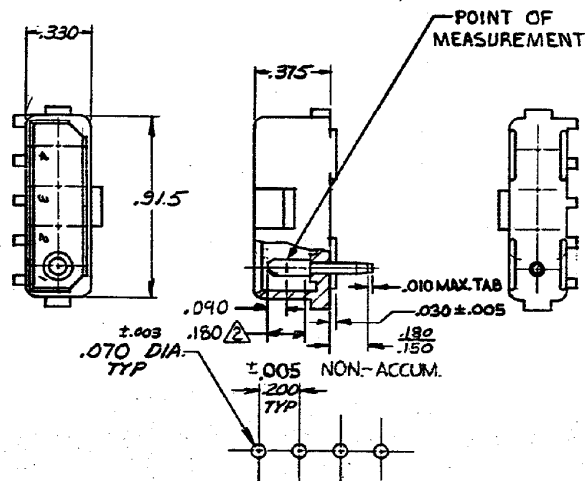

RECOMMENDED LAYOUT FOR
.062 THICK P.C. BOARD

- PARTS COMPLY WITH TE SOLDERABILITY SPEC. 109-11-3
- CONTACT IS PLATED OVERALL WITH .000050 NICKEL, THEN .000030 GOLD OVER CONTACT LENGTH INDICATED AND TIN PLATED ON SOLDER TAIL END.
- DIMENSION SHOWN REPRESENT PRODUCT IN DRY CONDITION. ADDITIONAL 2% GROWTH DUE TO END USE LOCATION MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.

SUPERSEDED BY
1586534-2

5-350543-2	NYLON - GREEN	COPPER ALLOY - GOLD
350543-2	NYLON - NATURAL	COPPER ALLOY - GOLD
350543-1	NYLON - NATURAL	COPPER ALLOY - PRE-TIN
ASSEMBLY NO. HSG. MATL & COLOR		PIN MATL & FINISH
REQUIRED PER ASSEMBLY		CUSTOMER COPY REFERENCE ONLY
OR 3-30-73	MATERIAL AND FINISH	TE Connectivity
Q. Eshman	SEE TABLE	CLASS .062 DIA. PIN
CHK 4/11/73	WIRE RANGE - INSULATION	TYPE POSITIVE LOCK
CM A. H. H. H.	TOLERANCE EXCEPT AS NOTED	NO 350543
DE 4-10-73	SCALE 1" = 10"	NAME 4 CIRCUIT MATE-N-LOK P.C. BOARD HEADER
APP 4-10-73		

N4	REVISED PER ECR-21-117185	VS	PJ	200CT020
N3	REVISED PER ECR-18-008156	JB	DZ	12NOV 2013
N2	REVISED PER ECR-13-008342	AV	RP	12NOV 2013
N1	REVISED PER ECO-11-005294	RK	HMR	12APR 11
LTR	REVISION RECORD	DR	GSK	DATE

WAS P-73-6103

33 (S) DIMENSIONS IN INCHES. DO NOT SCALE PRINT.

350543-2