



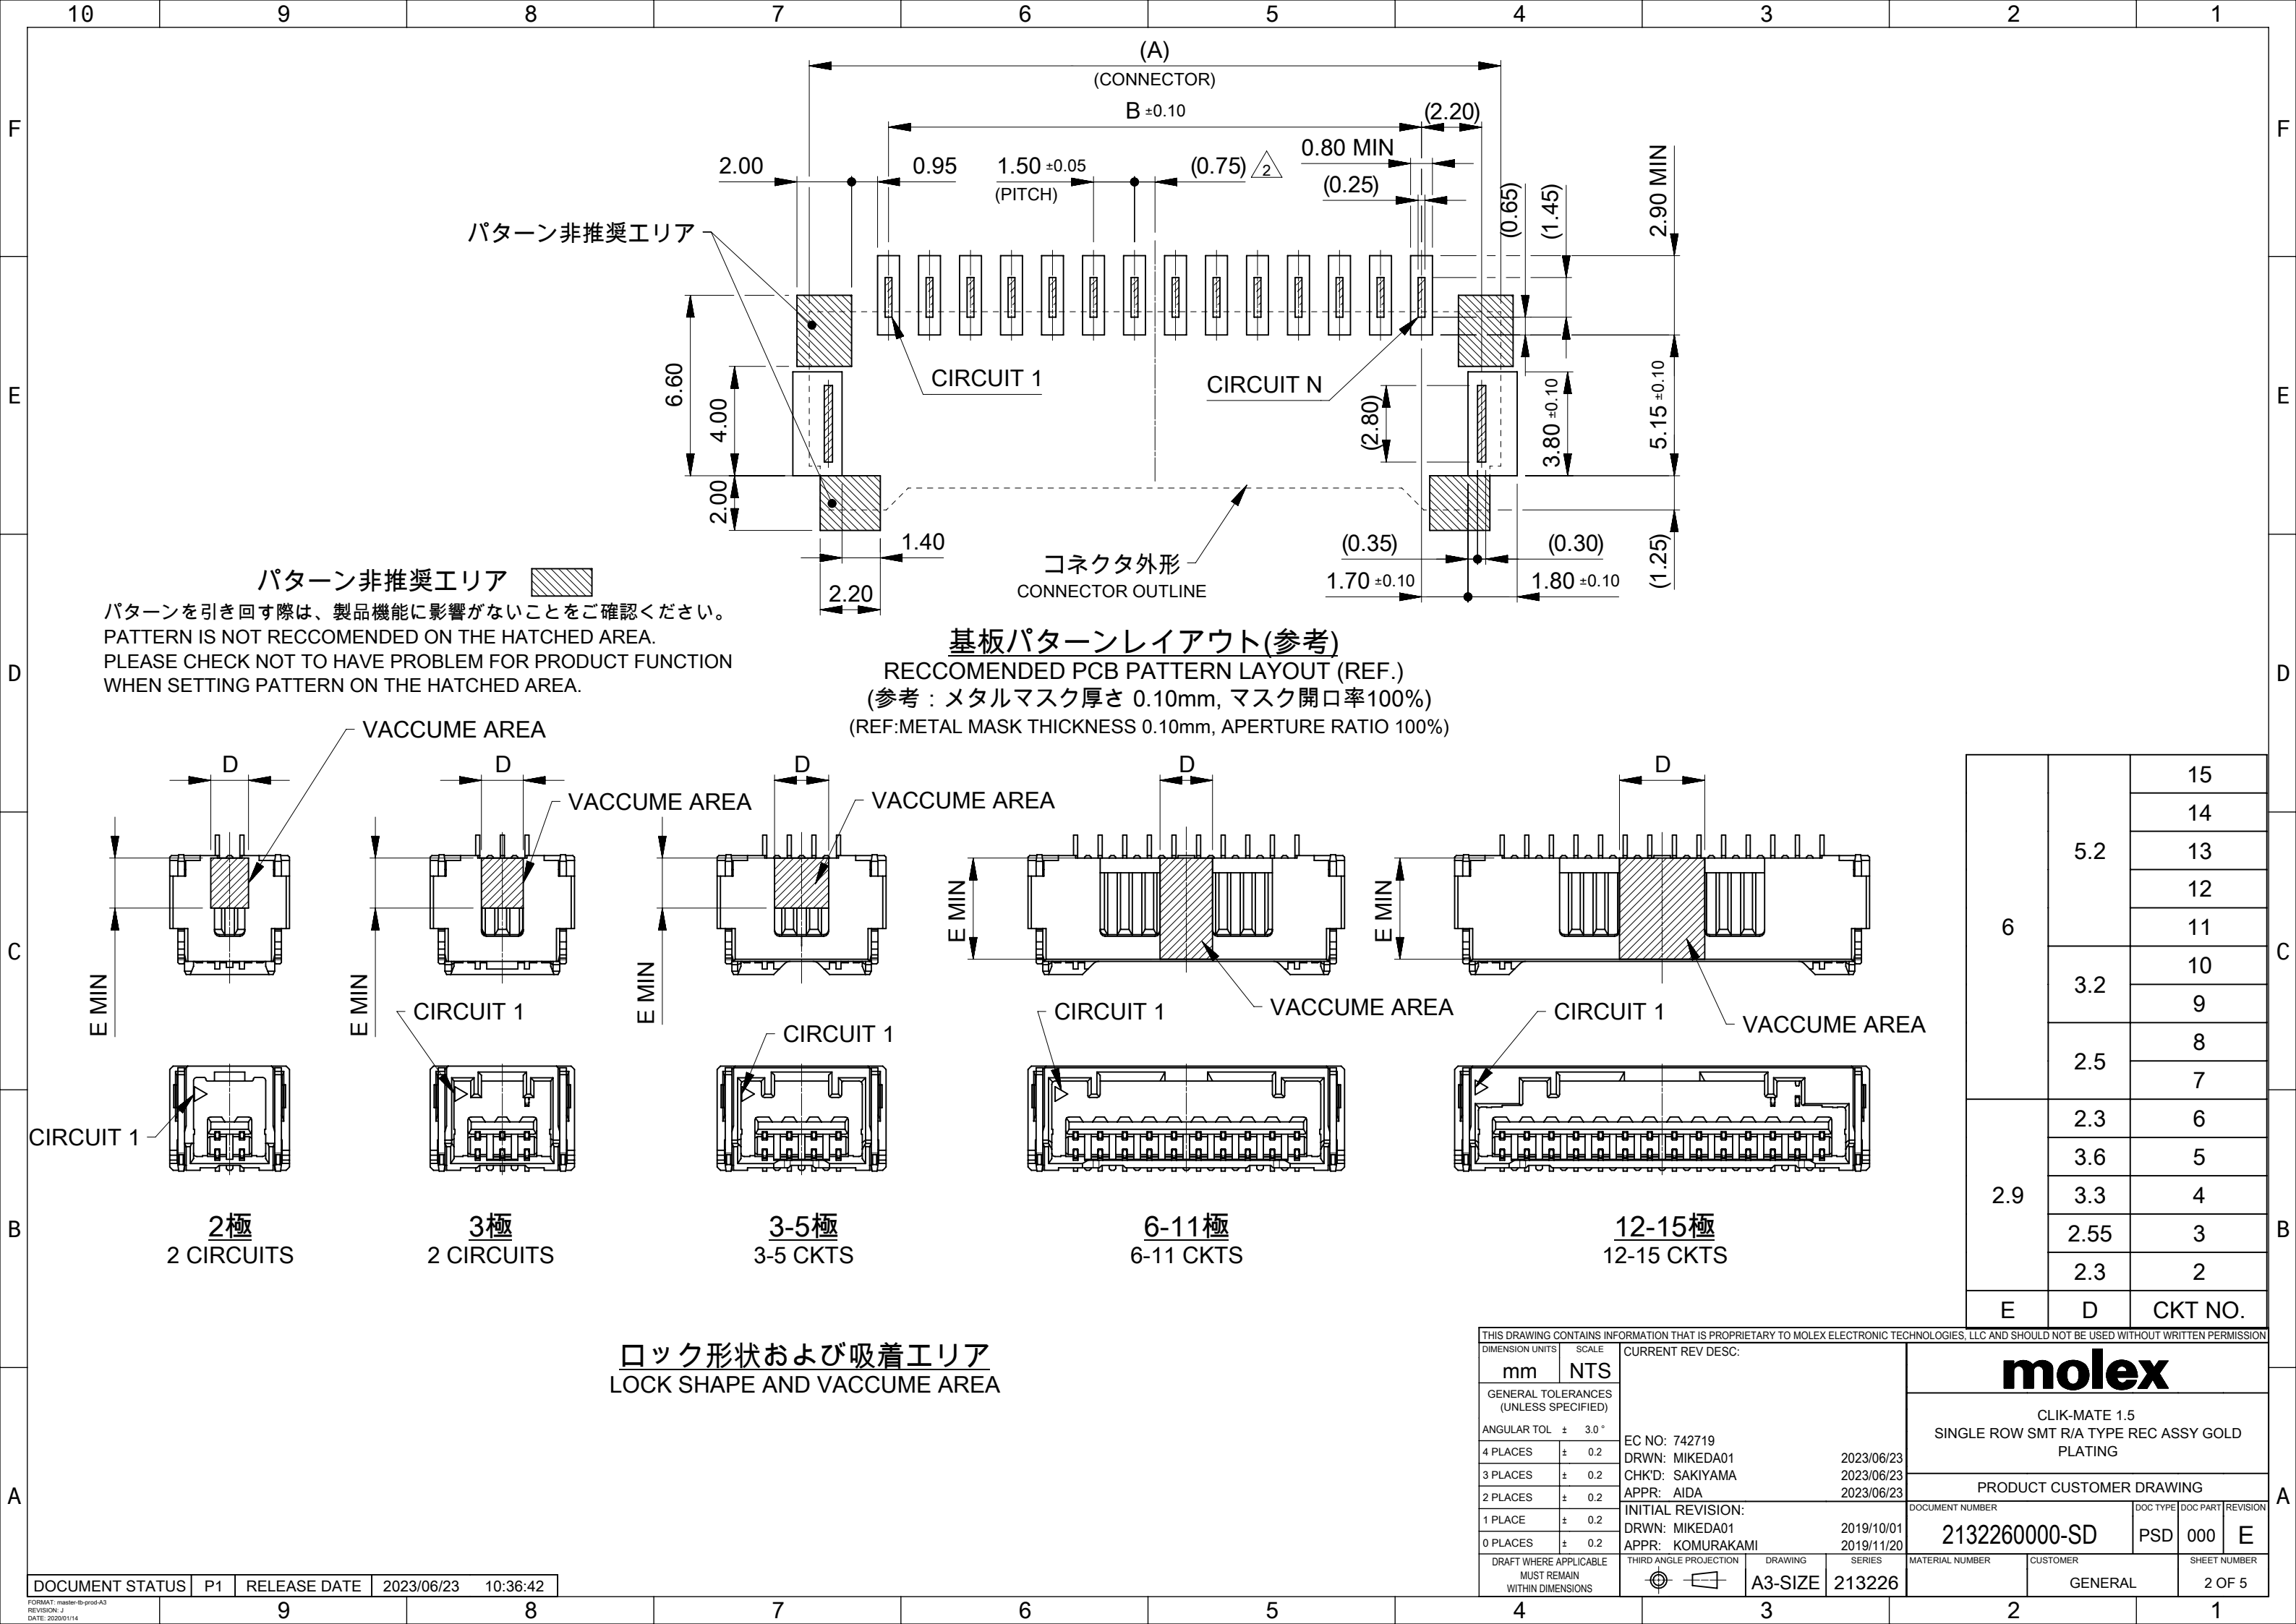

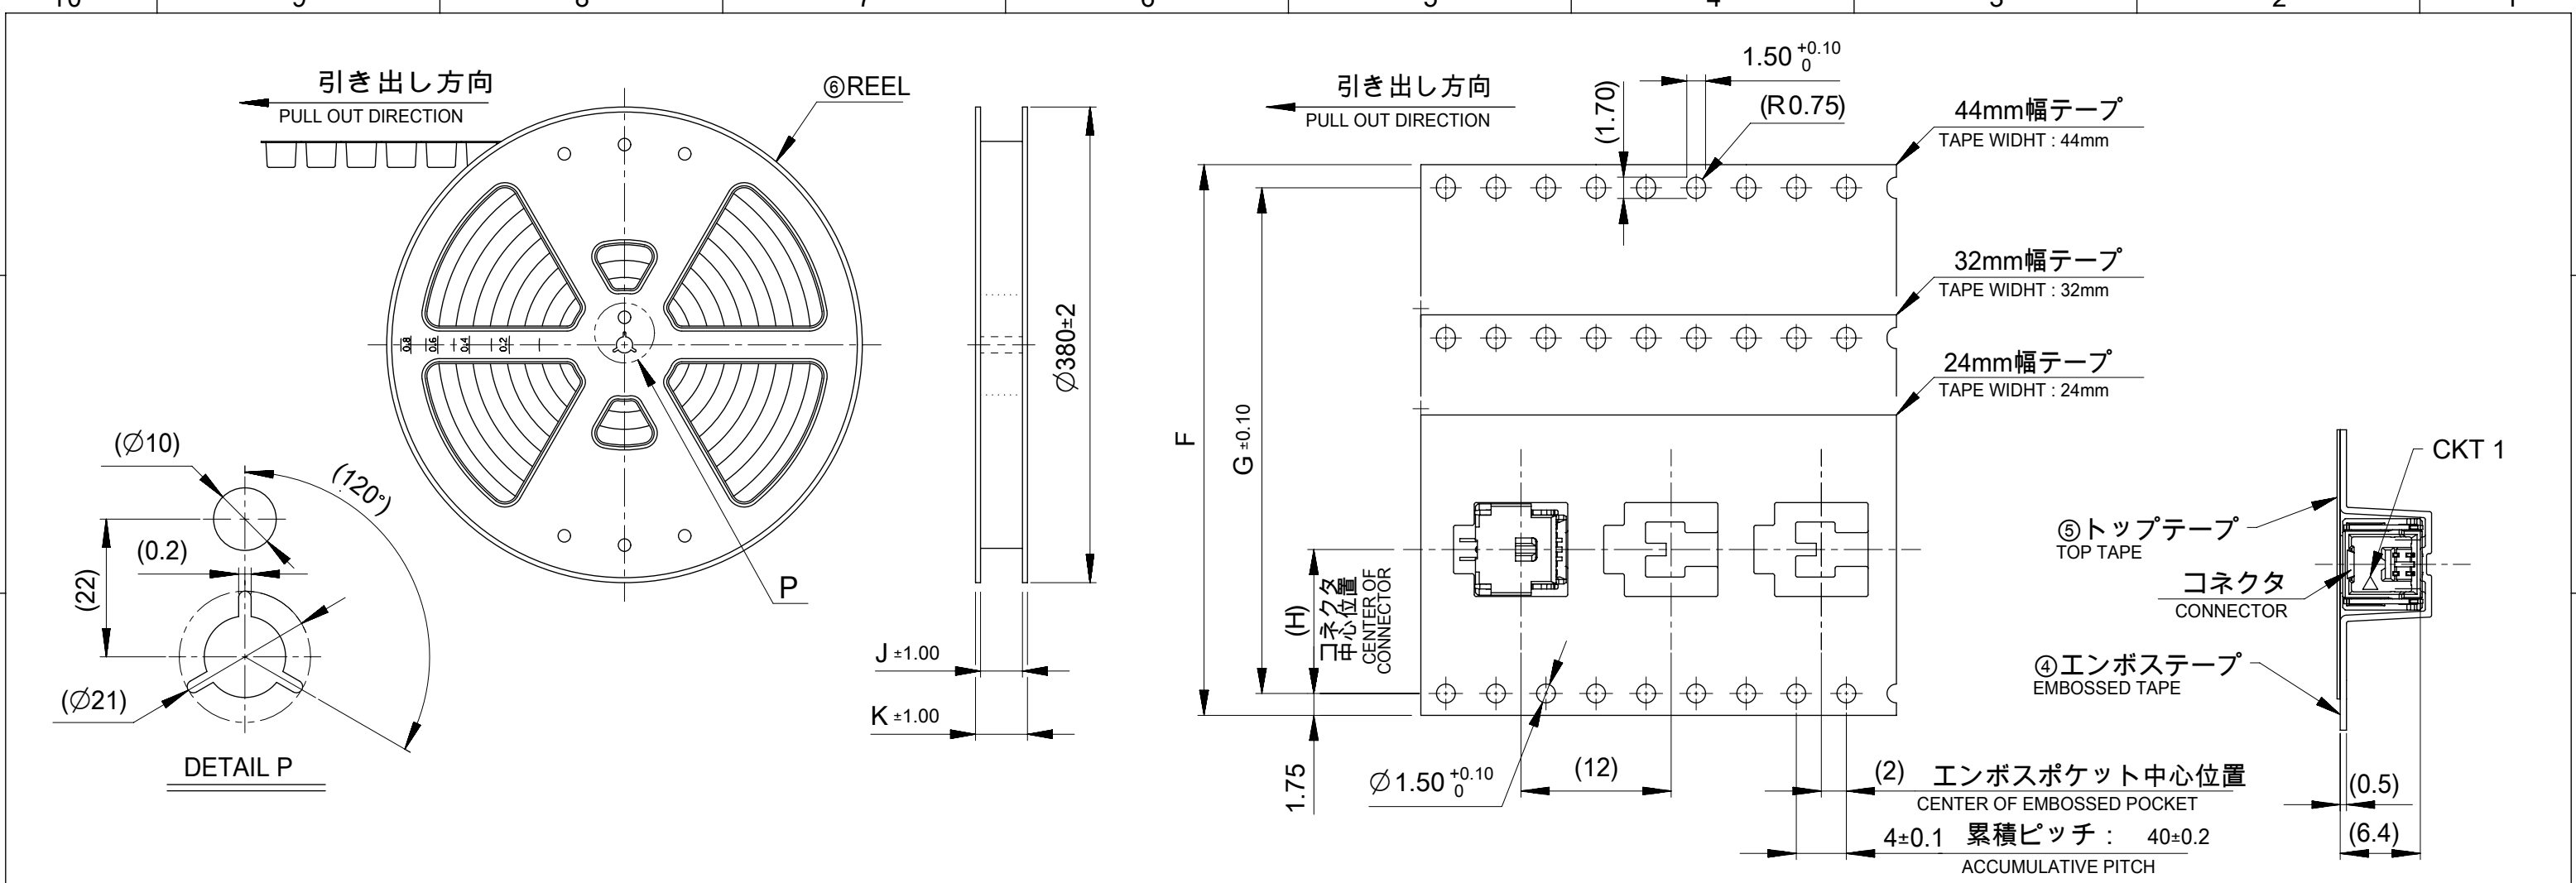

NOTES

5. 梱包数量 : 1,000個/リール
NUMBER OF CONNECTORS: 1,000 PIECES/REEL
6. リードテープ長さ
LEAD TAPE LENGTH
7. トップテープの剥離強度はJIS C0806-3に準拠
TOP TAPE PEELING FORCE IS DIFINED BY JIS C0806-3.
8. 本製品は乾燥剤入り、ハイバリア梱包による納入である
THIS PRODUCT IS DELIVERED IN A HIGH-BARRIER PACKAGE WITH DESICCANT

番号 No.	部品 PART	材質 MATERIAL
④	エンボステープ EMBOSSSED TAPE	ポリスチレン(PS) POLYSTYLENE
⑤	トップテープ TOP TAPE	ポリエチレン、ポリエチレンテレフタレート POLYETHYLENE (PE), POLYETHYLENE TELEPHthalate(PET)
⑥	リール REEL	ポリスチレン (リサイクル材を含む) POLYSTYLENE (CONTAINED RECYCLED MATERIAL)

DOCUMENT STATUS	P1	RELEASE DATE	2023/06/23	10:36:42
-----------------	----	--------------	------------	----------

49.4	45.4	20.2	40.4	44 $\pm$ 0.3	15
					14
					13
					12
					11
					10
37.4	33.4	14.2	28.4	32 $\pm$ 0.3	9
					8
					7
					6
29.4	25.4	11.5	-	24 $^{+0.3}_{-0.1}$	5
					4
					3
					2
K	J	H	G	エンボステープ幅F WIDTH OF TAPE	極数 CKT. NO.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS	SCALE
mm	NTS

GENERAL TOLERANCES (UNLESS SPECIFIED)

ANGULAR TOL	$\pm$	3.0 °
4 PLACES	$\pm$	0.2
3 PLACES	$\pm$	0.2
2 PLACES	$\pm$	0.2
1 PLACE	$\pm$	0.2
0 PLACES	$\pm$	0.2

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC:

EC NO: 742719
DRWN: MIKEDA01
CHK'D: SAKIYAMA
APPR: AIDA

2023/06/23
2023/06/23
2023/06/23

INITIAL REVISION:
DRWN: MIKEDA01
APPR: KOMURAKAMI

2019/10/01
2019/11/20

THIRD ANGLE PROJECTION

DRAWING

SERIES

MATERIAL NUMBER

CUSTOMER

SHEET NUMBER

molex

CLIK-MATE 1.5
SINGLE ROW SMT R/A TYPE REC ASSY GOLD
PLATING

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER

DOC TYPE

DOC PART

REVISION

2132260000-SD

PSD

000

E

A3-SIZE

213226


GENERAL

3 OF 5

△ 適用製品及び各種仕様書
APPLICABLE PRODUCTS AND VARIOUS SPECIFICATIONS

梱包仕様書 PACKAGING SPECIFICATION	PART NUMBER	DOCUMENT NUMBER
	213226 ****	2132269200-SPK

適用嵌合相手 MATE WITH	HOUSING	TERMINAL (GOLD PLATING)		
		PLATING THK	#24-28	#28-30
製品番号 PRODUCT NUMBER	502578 ****	0.1 micro-meters	213028 1*00	213029 1*00
		0.38 micro-meters	213028 3*00	213029 3*00
		0.76 micro-meters	213028 7*00	213029 7*00
製品仕様書 PRODUCT SPECIFICATION	5025780004-PS			
アプリケーション仕様書 APPLICATION SPECIFICATION	AS-502578-00* (*: 1...JAPANESE, 2...ENGLISH)			

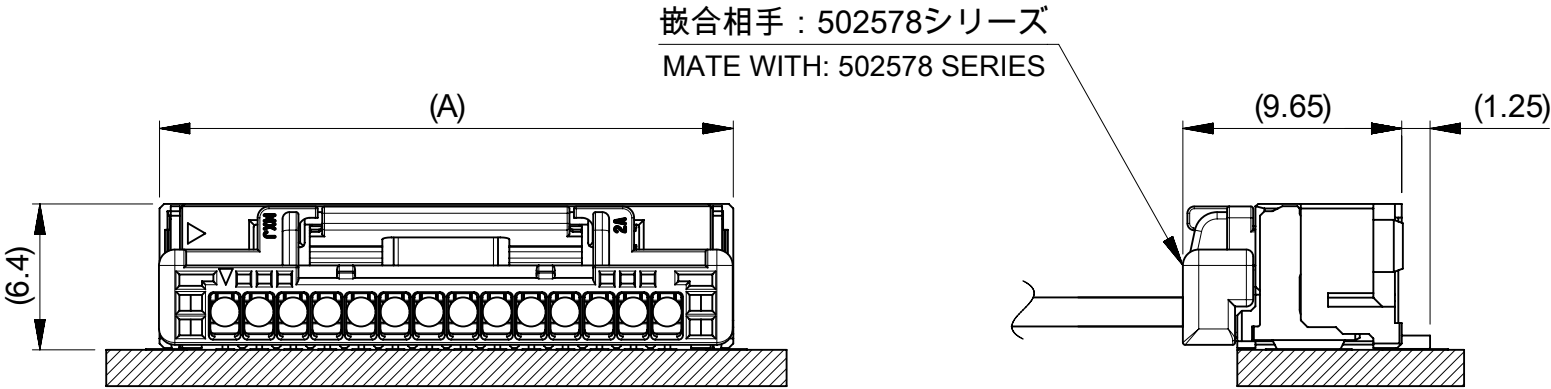

嵌合図
MATED CONNECTORS

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																			
DIMENSION UNITS		SCALE		CURRENT REV DESC:				molex											
mm		NTS																	
GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 742719 DRWN: MIKEDA01 2023/06/23 CHK'D: SAKIYAMA 2023/06/23 APPR: AIDA 2023/06/23 INITIAL REVISION: DRWN: MIKEDA01 2019/10/01 APPR: KOMURAKAMI 2019/11/20						CLIK-MATE 1.5 SINGLE ROW SMT R/A TYPE REC ASSY GOLD PLATING									
ANGULAR TOL ± 3.0 °										PRODUCT CUSTOMER DRAWING									
4 PLACES		± 0.2								DOCUMENT NUMBER				DOC TYPE		DOC PART		REVISION	
3 PLACES		± 0.2								2132260000-SD				PSD		000		E	
2 PLACES		± 0.2																	
1 PLACE		± 0.2																	
0 PLACES		± 0.2																	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER					
						A3-SIZE		213226				GENERAL		4 OF 5					

