
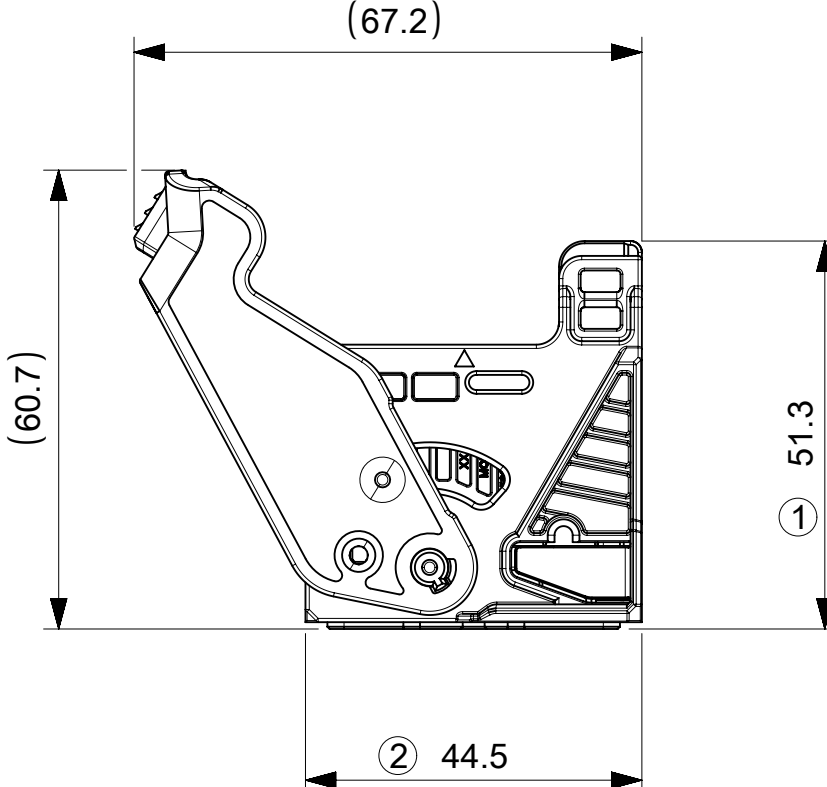
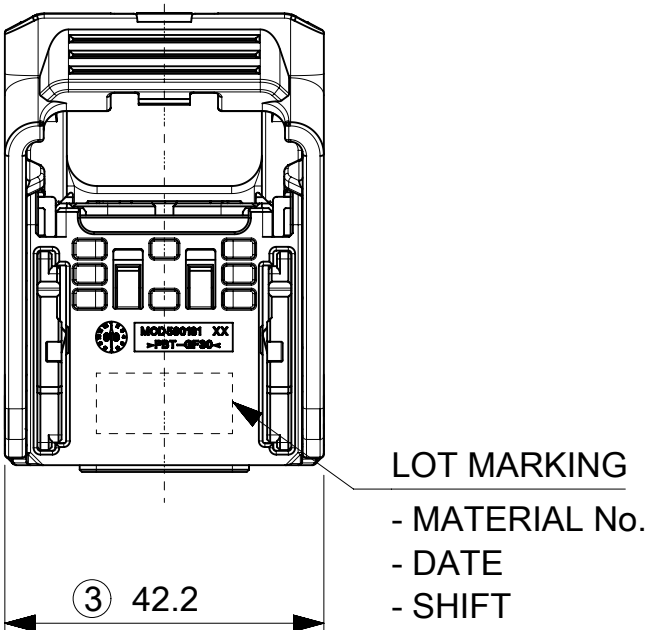
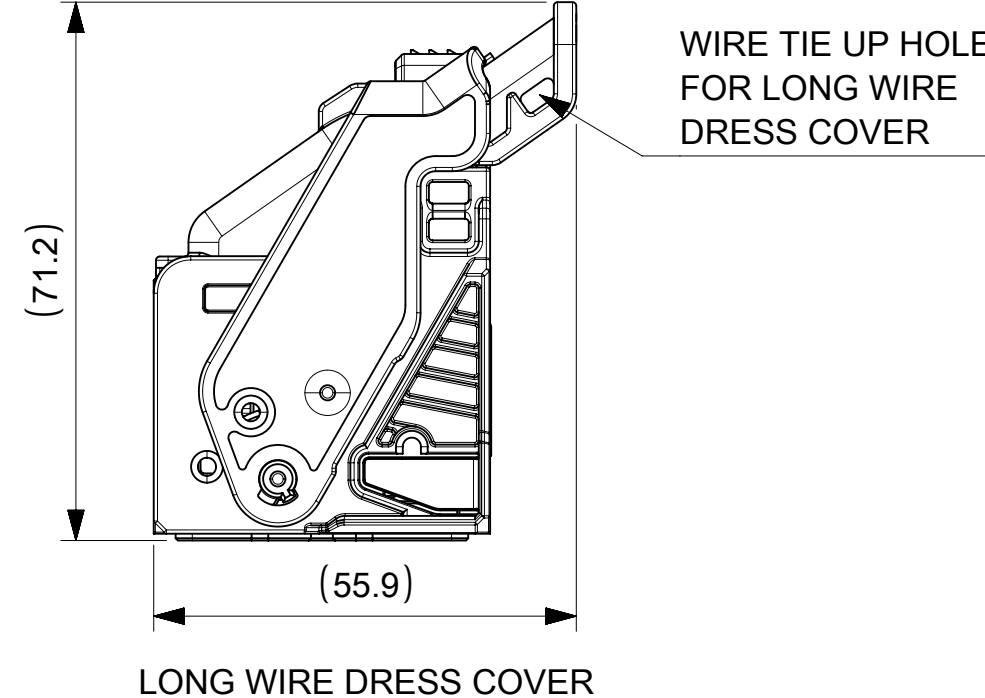
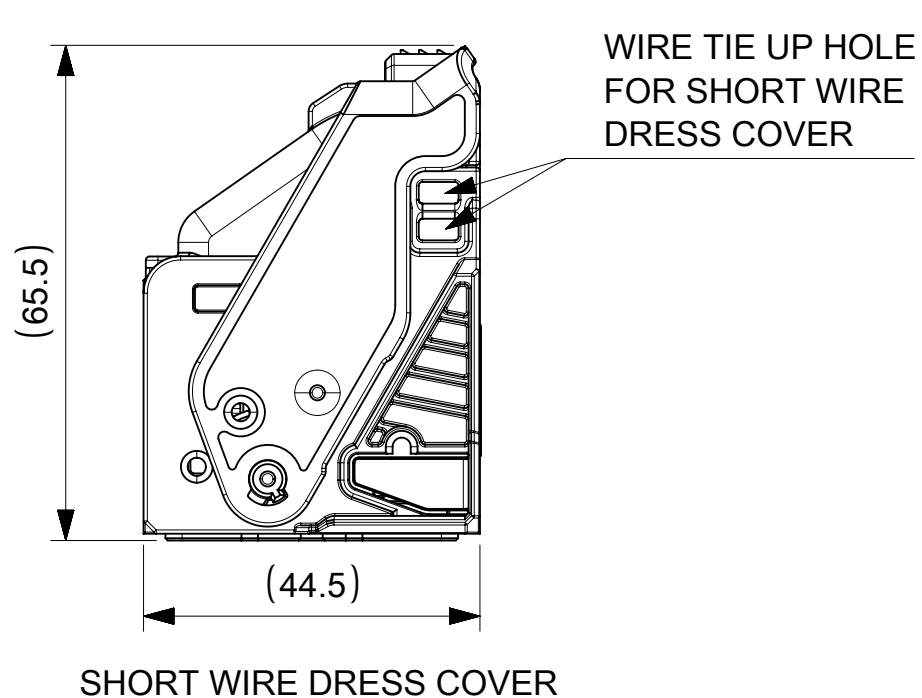


WIRE DRESS COVER OPTION

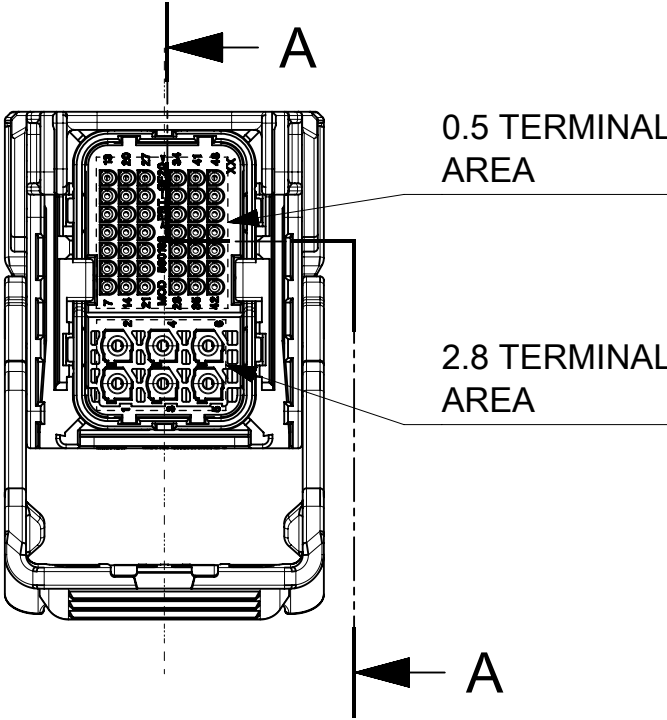

NOTES

1. APPLICABLE TERMINAL

0.5 : 560121 SERIES

2.8 : 560122 SERIES
2. APPLICABLE WIRE SIZE

0.5 : REFER AS-560121-001

2.8 : REFER AS-560122-001
3. APPLICABLE INSULATION DIAMETER

0.5 : $\varnothing 1.1 \sim 1.7$ mm

2.8 : $\varnothing 2.5 \sim 3.0$ mm
4. APPLICABLE DUMMY PLUG

0.5 : 560144-0115

2.8 : 560145-0101
5. APPLICABLE WIRE DRESS COVER

SHORT : 560189-0101

LONG : 560189-0111

0.5 TERMINAL SIDE	560151-4822
2.8 TERMINAL SIDE	560151-4832
WIRE PULLOUT DIRECTION	MATERIAL No.

GENERAL TOLERANCES (UNLESS SPECIFIED)	
10 UNDER	± 0.3
10 OVER 30 UNDER	± 0.4
30 OVER	± 0.5
ANGULAR	$\pm 5^\circ$

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DIMENSION UNITS		SCALE		CURRENT REV DESC:			molex COMPACTUS 48WAY ASSY		
mm		1:1							
GENERAL TOLERANCES (UNLESS SPECIFIED)									
ANGULAR TOL ± °									
4 PLACES ±									
3 PLACES ±		EC NO: 620306			PRODUCT CUSTOMER DRAWING				
2 PLACES ±		DRWN: KKATO01							

