


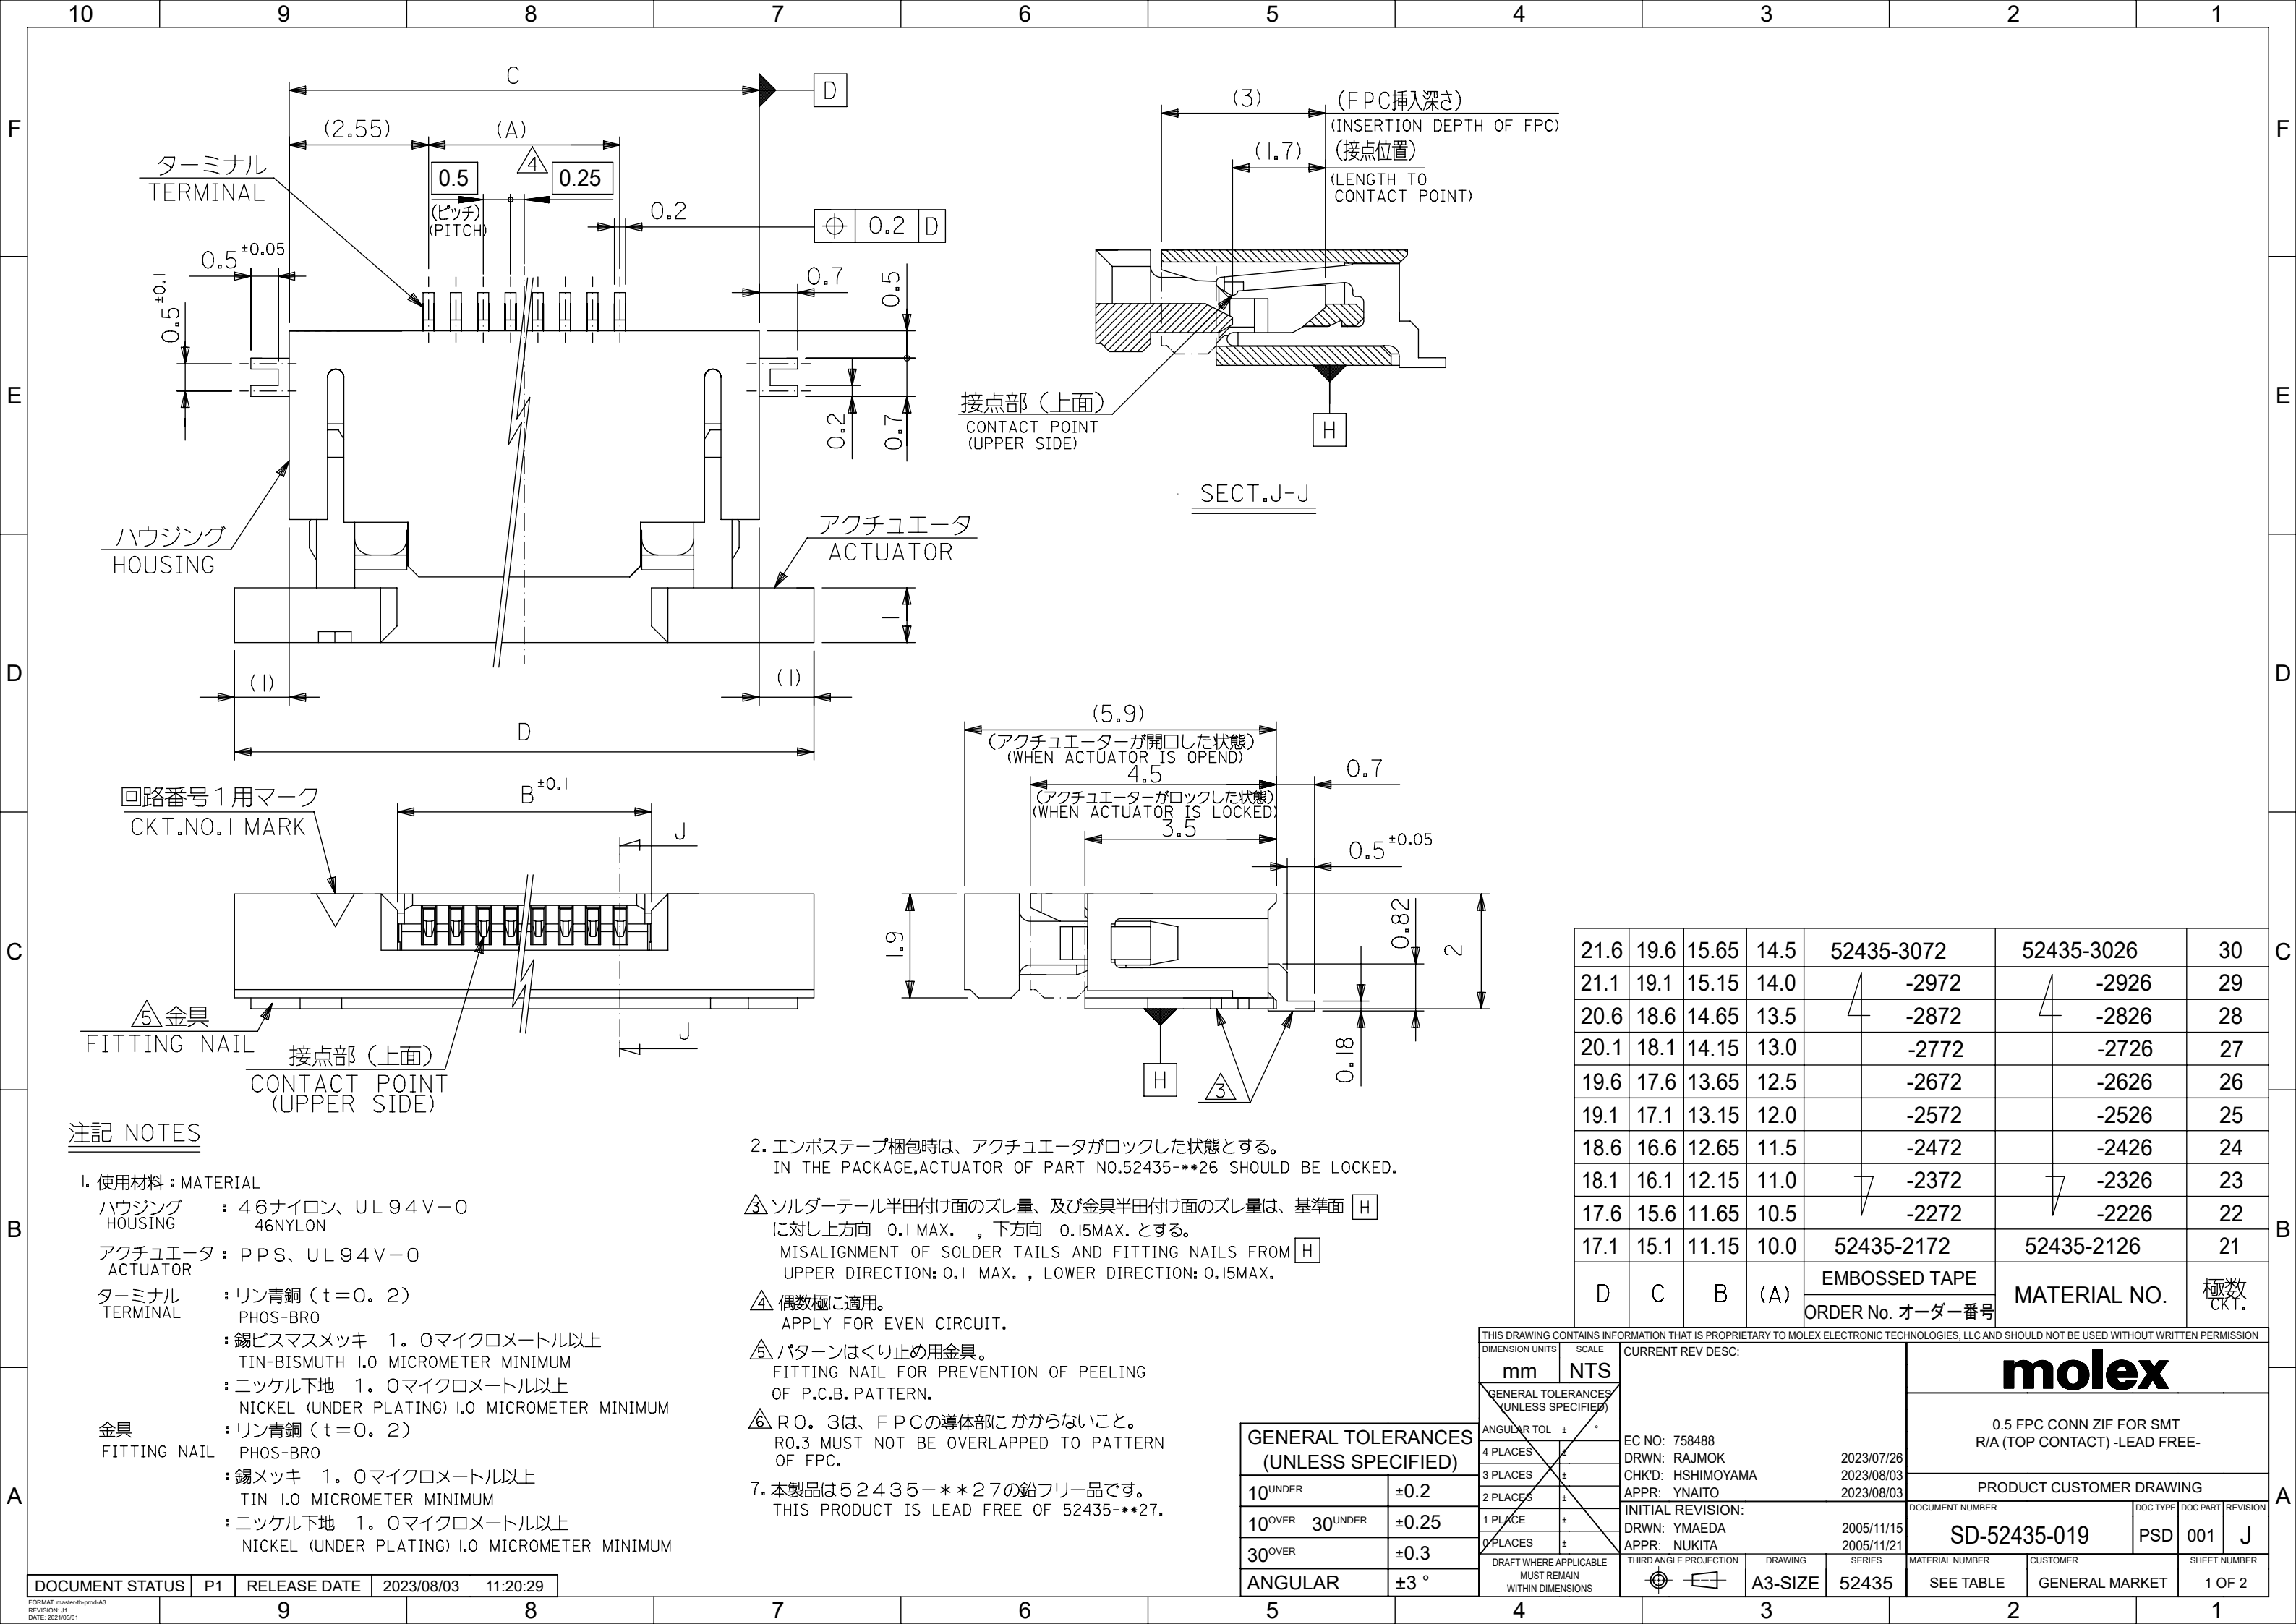


注記 NOTES

- I. 使用材料 : MATERIAL
- ハウジング : 46ナイロン、UL94V-0
HOUSING 46NYLON
- アクチュエータ : PPS、UL94V-0
ACTUATOR
- ターミナル : リン青銅 (t=0.2)
TERMINAL PHOS-BRO
- 金具 : リン青銅 (t=0.2)
FITTING NAIL PHOS-BRO
- 金具 : 錫ビスマスメッキ 1. 0マイクロメートル以上
FITTING NAIL TIN-BISMUTH 1.0 MICROMETER MINIMUM
- 金具 : ニッケル下地 1. 0マイクロメートル以上
FITTING NAIL NICKEL (UNDER PLATING) 1.0 MICROMETER MINIMUM
- 金具 : リン青銅 (t=0.2)
FITTING NAIL PHOS-BRO
- 金具 : 錫メッキ 1. 0マイクロメートル以上
FITTING NAIL TIN 1.0 MICROMETER MINIMUM
- 金具 : ニッケル下地 1. 0マイクロメートル以上
FITTING NAIL NICKEL (UNDER PLATING) 1.0 MICROMETER MINIMUM

2. エンボステープ梱包時は、アクチュエータがロックした状態とする。
IN THE PACKAGE, ACTUATOR OF PART NO.52435-***26 SHOULD BE LOCKED.
- △ ソルダータール半田付け面のズレ量、及び金具半田付け面のズレ量は、基準面 H に対し上方向 0.1 MAX. , 下方向 0.15 MAX. とする。
MISALIGNMENT OF SOLDER TAILS AND FITTING NAILS FROM H
UPPER DIRECTION: 0.1 MAX. , LOWER DIRECTION: 0.15 MAX.
- △ 偶数極に適用。
APPLY FOR EVEN CIRCUIT.
- △ パターンはくり止め用金具。
FITTING NAIL FOR PREVENTION OF PEELING OF P.C.B. PATTERN.
- △ R0.3は、FPCの導体部にかからないこと。
R0.3 MUST NOT BE OVERLAPPED TO PATTERN OF FPC.
7. 本製品は52435-***27の鉛フリー品です。
THIS PRODUCT IS LEAD FREE OF 52435-***27.

21.6	19.6	15.65	14.5	52435-3072	52435-3026	30
21.1	19.1	15.15	14.0	-2972	-2926	29
20.6	18.6	14.65	13.5	-2872	-2826	28
20.1	18.1	14.15	13.0	-2772	-2726	27
19.6	17.6	13.65	12.5	-2672	-2626	26
19.1	17.1	13.15	12.0	-2572	-2526	25
18.6	16.6	12.65	11.5	-2472	-2426	24
18.1	16.1	12.15	11.0	-2372	-2326	23
17.6	15.6	11.65	10.5	-2272	-2226	22
17.1	15.1	11.15	10.0	52435-2172	52435-2126	21
D	C	B	(A)	EMBOSSSED TAPE	MATERIAL NO.	極数
				ORDER No. オーダー番号		CKT.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				CURRENT REV DESC:				molex			
DIMENSION UNITS		SCALE						0.5 FPC CONN ZIF FOR SMT R/A (TOP CONTACT) -LEAD FREE-			
mm		NTS						PRODUCT CUSTOMER DRAWING			
GENERAL TOLERANCES (UNLESS SPECIFIED)		ANGULAR TOL		EC NO: 758488 DRWN: RAJMOK CHK'D: HSHIMOYAMA APPR: YNAITO				DOCUMENT NUMBER			
4 PLACES		±		2023/07/26				2023/08/03			
3 PLACES		±		INITIAL REVISION:				DOC TYPE			
2 PLACES		±		DRWN: YMAEDA				SD-52435-019			
1 PLACE		±		APPR: NUKITA				PSD			
0 PLACES		±		2005/11/15				001			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING				SHEET NUMBER			
ANGULAR		±3 °		A3-SIZE				1 OF 2			

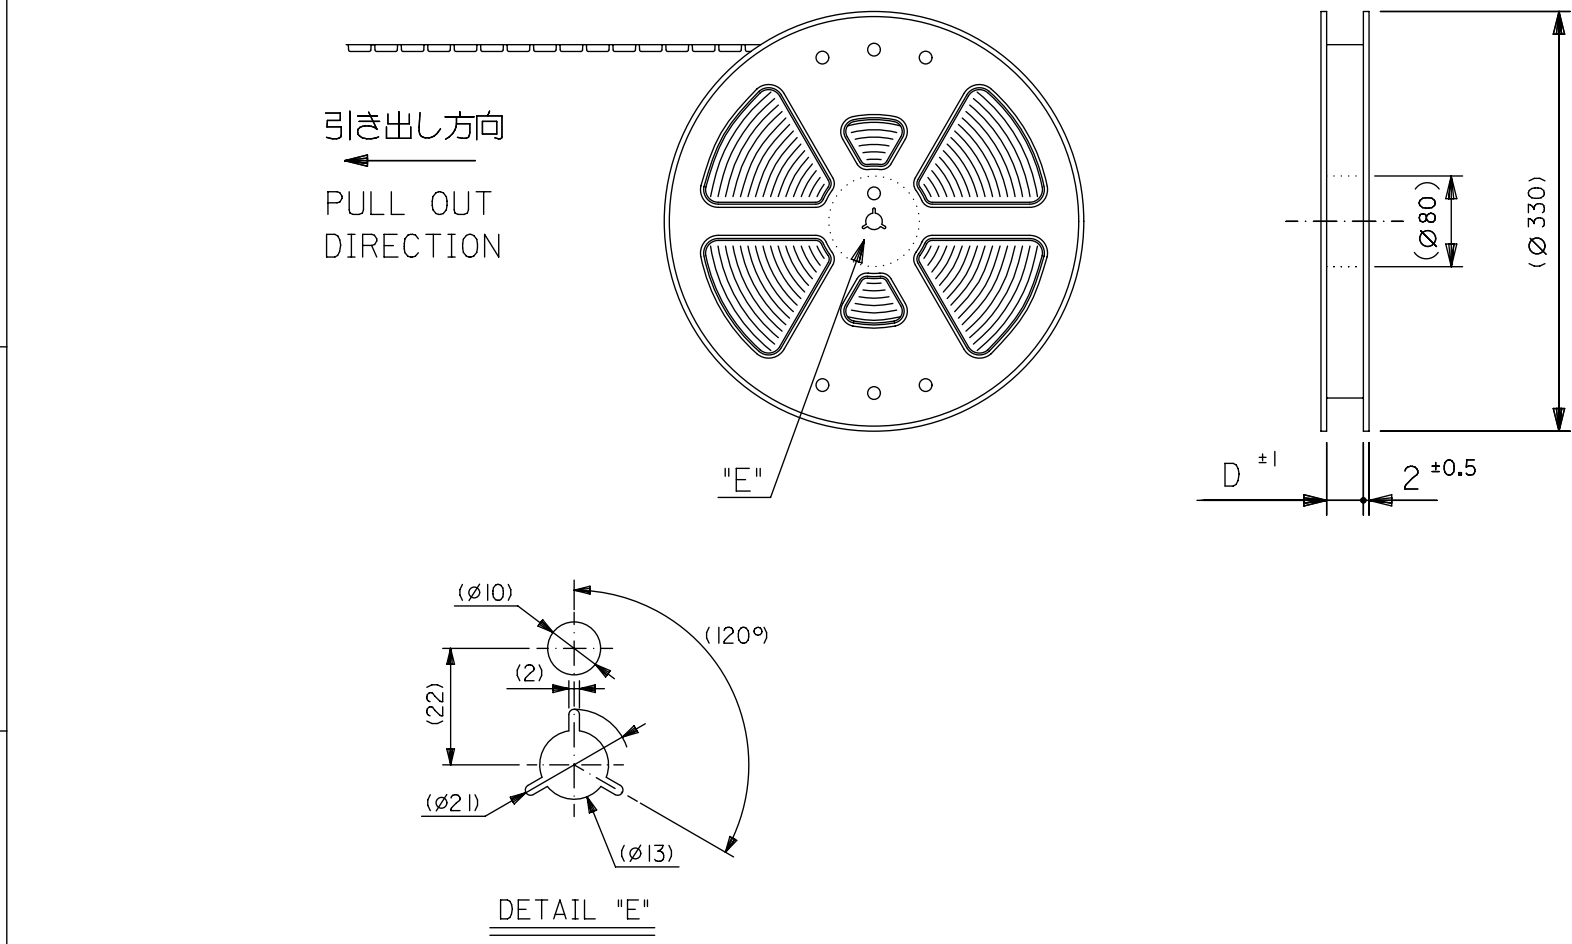


5. 材料 (MATERIAL)
キャリアテープ (CARRIER TAPE) : ポリプロピレン (POLYPROPYLENE)
トップテープ (TOPTAPE) : PET, PE, PEF
リール (REEL) : ポリスチレン (PS) <リサイクル材を含む>
POLYSTYREN (PS) <RECYCLE MATERIAL CONTAINED>

6. 本製品は52435-**-91の鉛フリー品です。
THIS PRODUCT IS LEAD FREE OF 52435-**-91.


注記 NOTES

- 製品番号 52435-**-26 の梱包状態はアクチュエータがロックした状態とする。
詳細寸法については図面 SD-52435- 019 を参照下さい。
IN THE PACKAGE, ACTUATOR OF PART NO.52435-**-26 SHOULD BE LOCKED
RE DETAILED DIMENSIONS, SEE SD-52435- 019
- 梱包数量 : 1000個/リール
NUMBER OF CONNECTORS: 1000PCS/REEL
- リードテープ長さ LEAD TAPE LENGTH

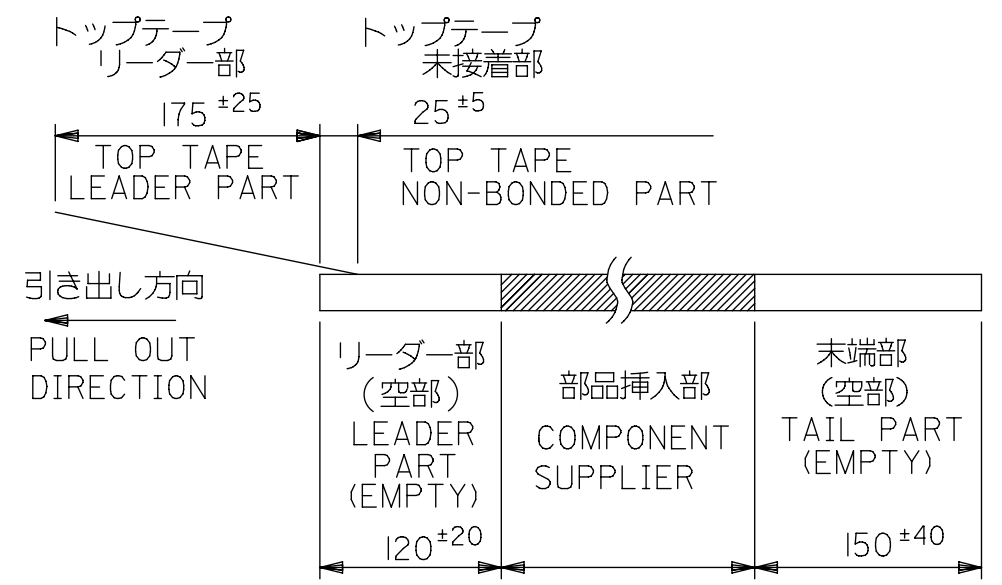


- トップテープの剥離強度 : (剥離方向は下図参照)
0.1N ~ 1.3N (10gf ~ 130gf) 尚、本規格値は、出荷時に適用。
(但し、輸送時に剥離が発生しない事。)

PEELING OFF FORCE OF TOP TAPE
0.1N ~ 1.3N (10gf ~ 130gf) (PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT
PEEL OFF SHOULD NOT BE ALLOWED,
DURING TRANSPORTATION

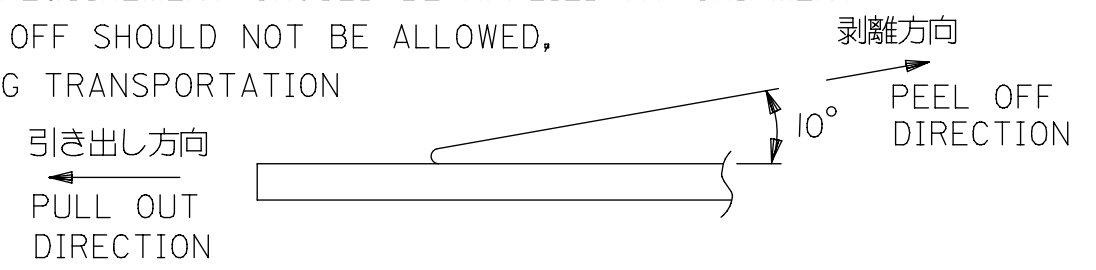

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
DIMENSION UNITS		SCALE		CURRENT REV DESC:				molex			
mm		NTS									
GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 719890 DRWN: NARENC 2022/08/23 CHK'D: SMARUYAMA 2022/09/05 APPR: YNAITO 2022/09/05				0.5 FPC CONN ZIF SMT R/A WITH TAPE EMBSTP PKG -LEAD FREE-			
ANGULAR TOL ± 3.0 °		EC NO: 719890				PRODUCT CUSTOMER DRAWING					
4 PLACES ±		DRWN: NARENC 2022/08/23									
3 PLACES ±		CHK'D: SMARUYAMA 2022/09/05									
2 PLACES ±		APPR: YNAITO 2022/09/05									
1 PLACE ±		INITIAL REVISION:				DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION	
0 PLACES ±		DRWN: YMAEDA 2005/11/15				SD-52435-020		PSD	001	E	
		APPR: NUKITA 2005/11/21									
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER		CUSTOMER	SHEET NUMBER
						A3-SIZE	52435	SEE TABLE		GENERAL MARKET	1 OF 3
GENERAL TOLERANCES (UNLESS SPECIFIED)											
10 ^{UNDER} ±0.2											
10 ^{OVER} 30 ^{UNDER} ±0.25											
30 ^{OVER} ±0.3											
ANGULAR ±3 °											

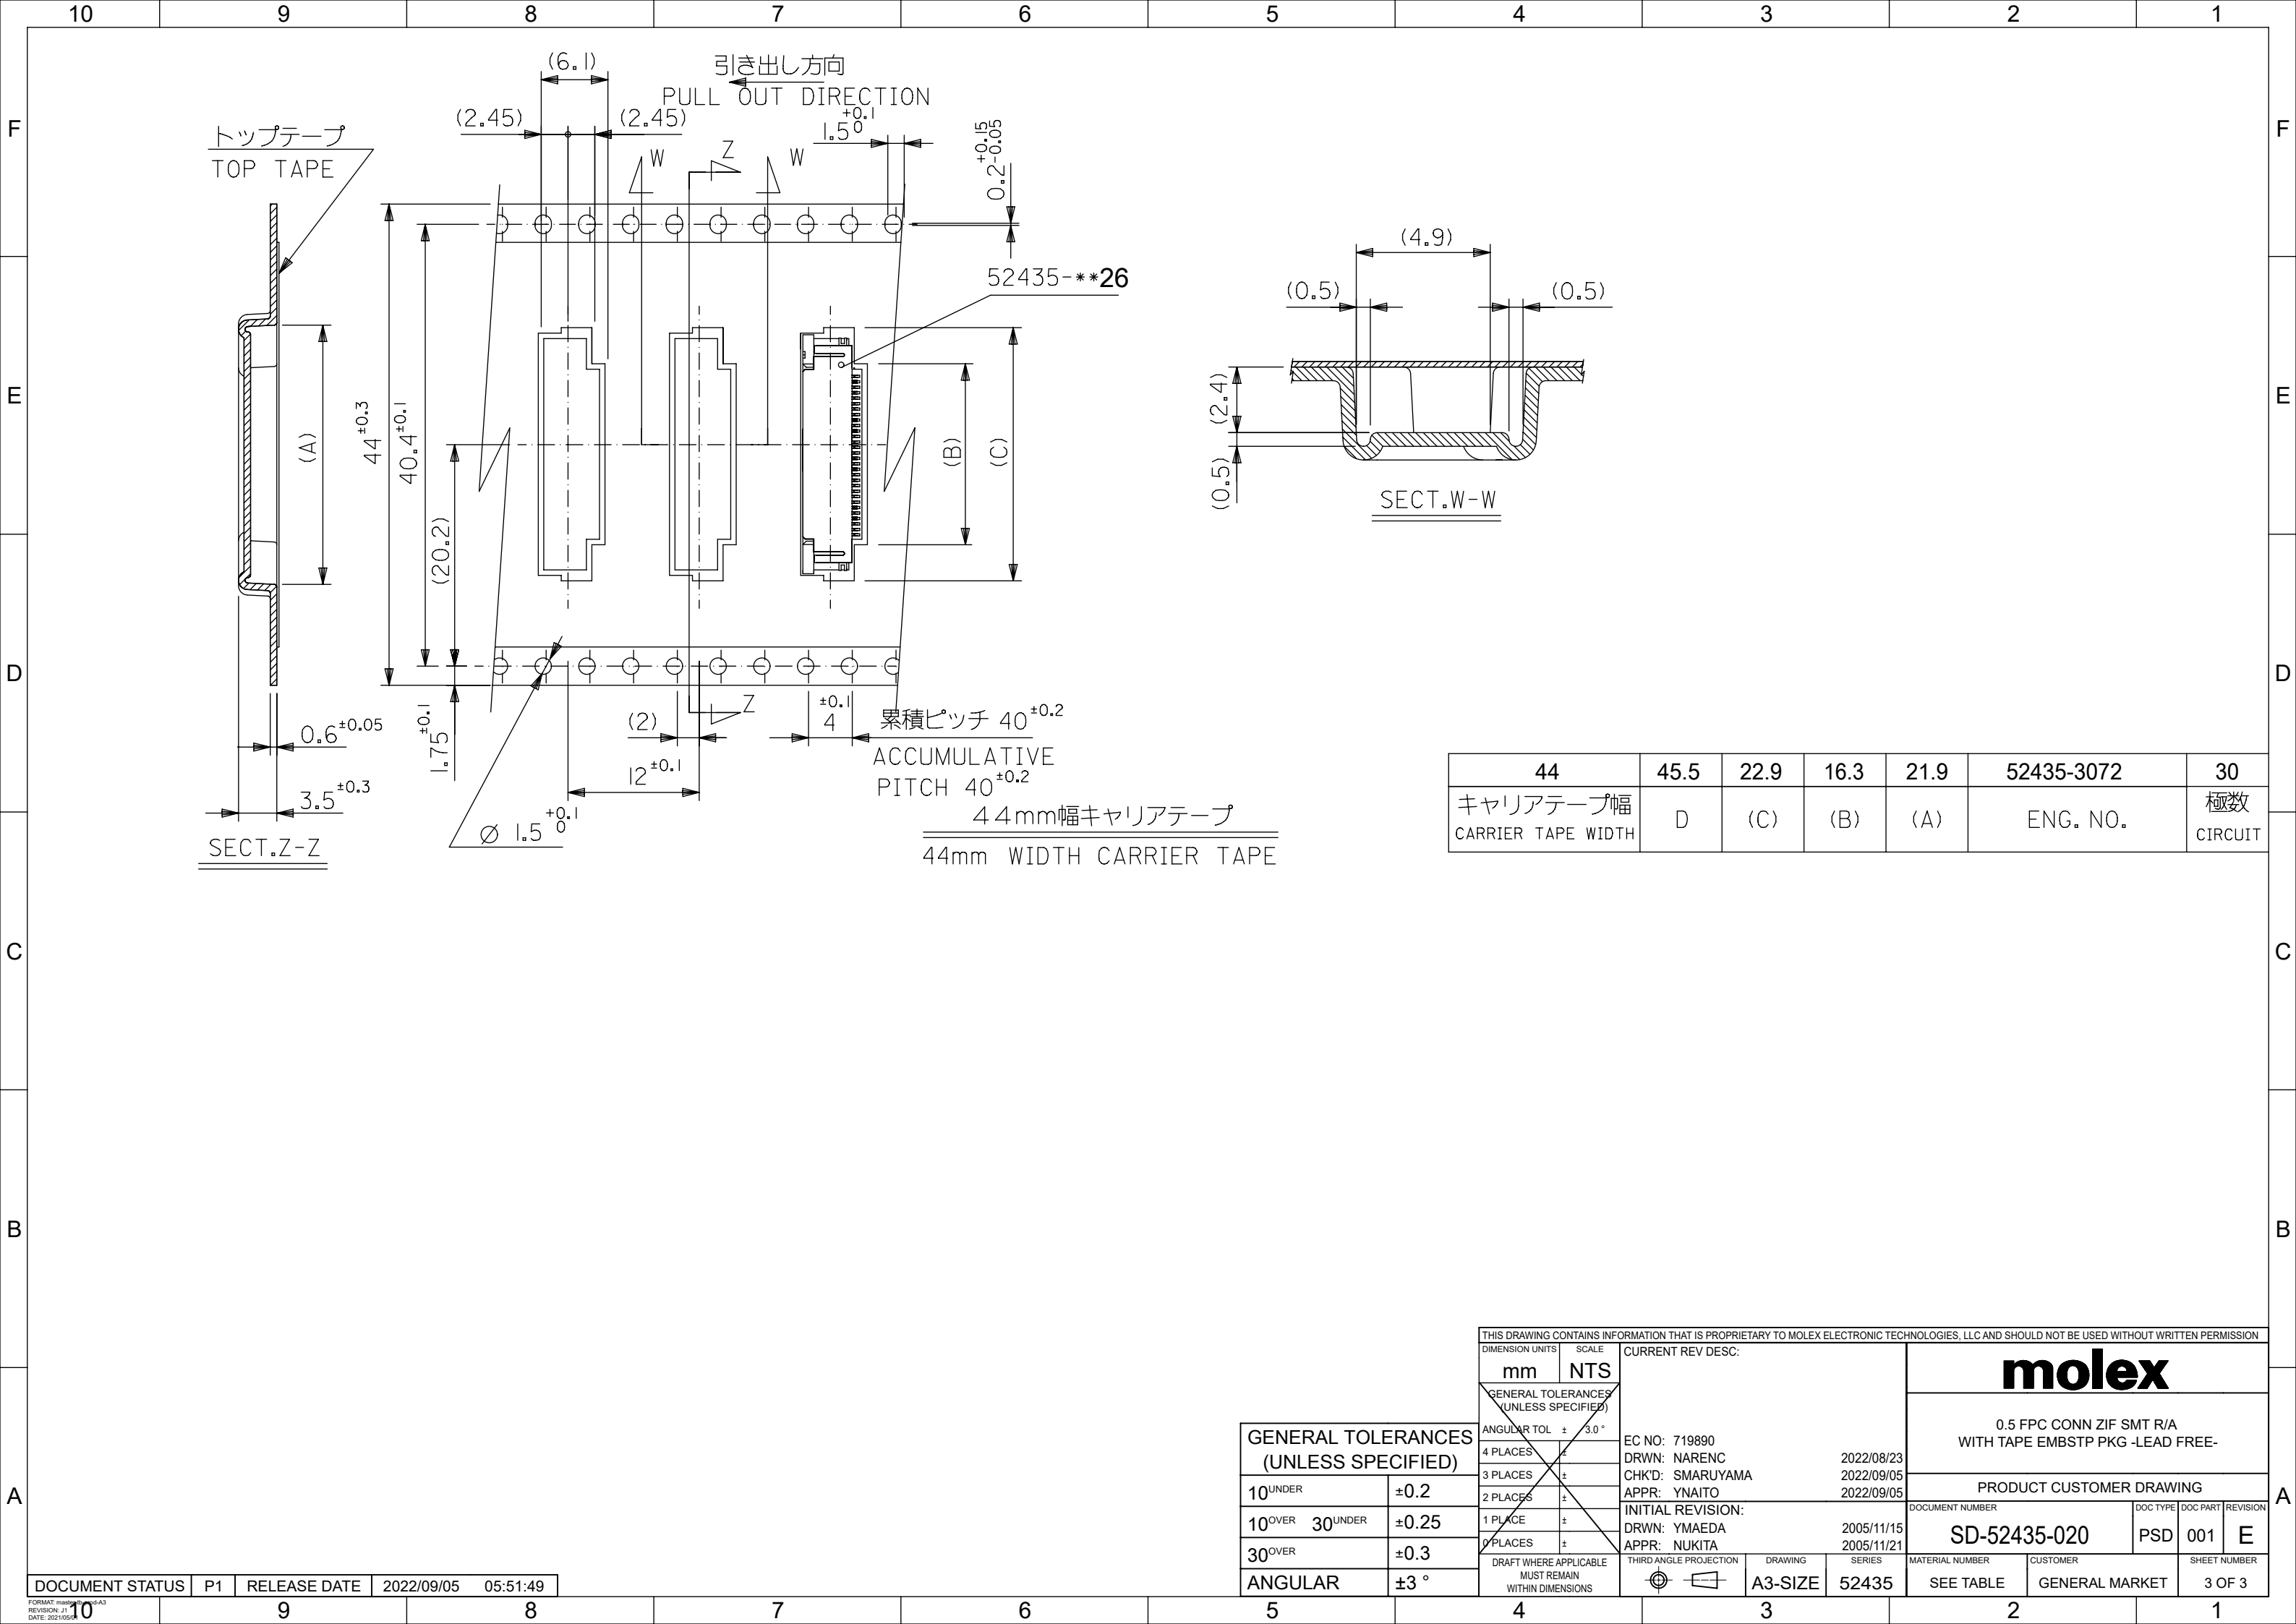

44	45.5	22.9	16.3	21.9	52435-3072	30
キャリアテープ幅 CARRIER TAPE WIDTH	D	(C)	(B)	(A)	ENG. NO.	極数 CIRCUIT

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
DIMENSION UNITS		SCALE		CURRENT REV DESC:									
mm		NTS											
GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± 3.0 ° 4 PLACES ± 3 PLACES ± 2 PLACES ± 1 PLACE ± 0 PLACES ± DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				molex 0.5 FPC CONN ZIF SMT R/A WITH TAPE EMBSTP PKG -LEAD FREE- PRODUCT CUSTOMER DRAWING DOCUMENT NUMBER SD-52435-020 DOC TYPE PSD DOC PART 001 REVISION E SHEET NUMBER 3 OF 3									
EC NO: 719890 DRWN: NARENC CHK'D: SMARUYAMA APPR: YNAITO				2022/08/23 2022/09/05 2022/09/05									
INITIAL REVISION: DRWN: YMAEDA APPR: NUKITA				2005/11/15 2005/11/21									
THIRD ANGLE PROJECTION				DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
				A3-SIZE		52435		SEE TABLE		GENERAL MARKET		3 OF 3	

DOCUMENT STATUS	P1	RELEASE DATE	2022/09/05	05:51:49
-----------------	----	--------------	------------	----------