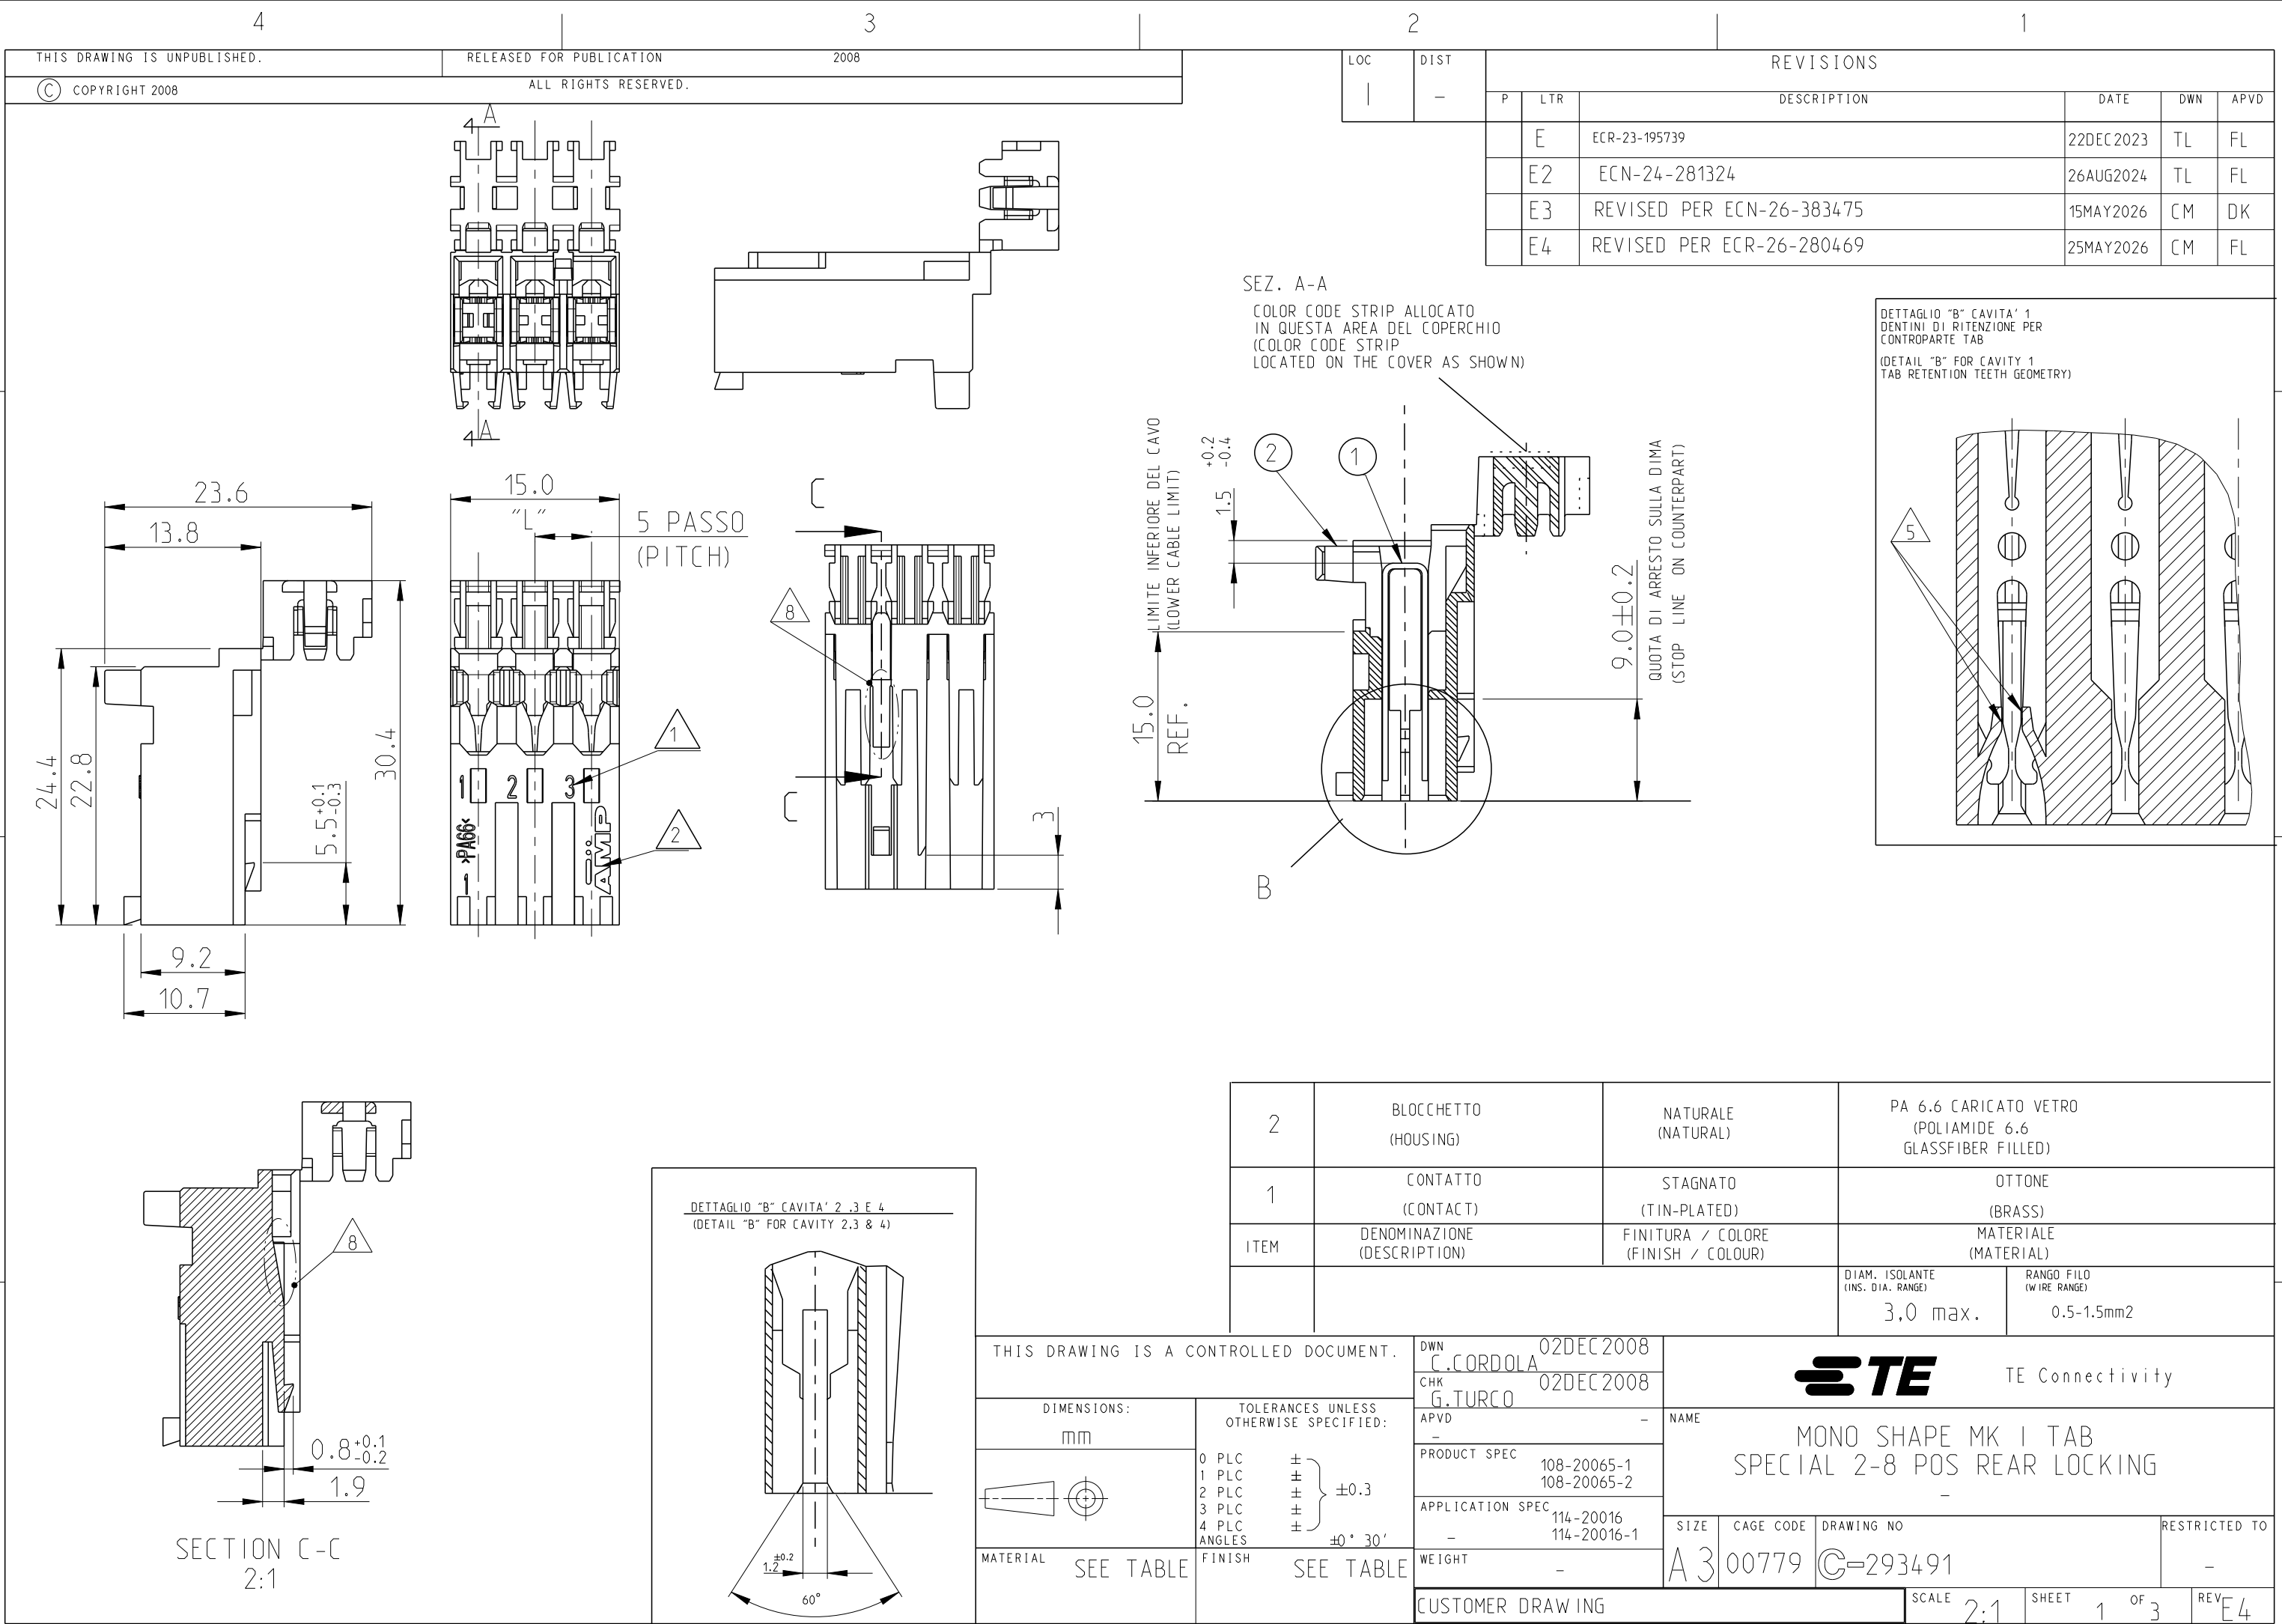




4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

2008

© COPYRIGHT 2008

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

NUMERO DI VIE

CONFIGURAZIONE
(Vista connettore dall'alto)

VERSIONE PEZZI IN VASSOIO

PART REV.

VERSIONE PEZZI SCIOITI

PART REV

POSIZIONE AGGANCIO
(LATO POSTERIORE)

POSIZIONE POLARIZZAZIONE
(LATO POSTERIORE)
(SE PRESENTE)

L +0.2
-0.3
(mm)

NOTE
MARCHIATURA CON BANDA COLORATA

NO OF POS

CONFIGURATION
(View from top side)

TRAY PACKAGING VERSION

LOCKING POSITION
(Back side)

POSITION FOR POLARIZATION
ON BACK SIDE
(IF PRESENT)

NOTE
STRIP COLOUR

2

3

4

4

8

1

1

1

1

10

0-293491-2

1-293491-2

2-293491-2

0-293491-3

1-293491-3

0-293491-4

1-293491-4

0-293491-8

D

D

D

D

D

D

D

-

-

-

-

-

-

-

1-2

1-2

1-2

2-3

1-2

1-2, 3-4

1-2, 3-4

1-2, 7-8

1S-2D

1S

-

2S

1S-2D

1S,2D,3S

1S,2D

2D,3S,6D,7S

9.9

9.9

9.9

14.9

14.9

19.9

19.9

39.9

-

-

-

-

BLACK

-

-

-

SCALE 2:1

VISTA LATO ALTO
(TOP SIDE VIEW)

POSIZIONE BANDA COLORATA
(COLOR STRIP AREA)

AGGANCIO POSTERIORE
(REAR LOCKING LANCE)
BETWEEN WAYS 2-3

POLARIZATION RIB
POSITION 2S AS SHOWN

NUMERO DELLA VIA
(WAY NUMBERING)

SCALE 2:1

CODIFICHE ASPORTABILI
(REMOVABLE CODIFICATION)

NOTE/NOTES:

NUMERI DI IDENTIFICAZIONE CAVITA'.
(CIRCUIT IDENTIFICATION)

MARCHIO DI FABBRICA (LIBERA POSIZIONE).
(TRADE MARK LOGO FREE POSITION)

L'AGGANCIO DELLA LINGUETTA E' POSIZIONATO SOLO NELLA CAVITA' N.1 (VEDI ANCHE NOTA 5)
ED E' PRESENTE SOLO PER I CONNETTORI DI 2, 3 E 4 VIE.
(THE RETENTION TOOTH IS LOCATED ONLY IN CAVITY N.1 (SEE ALSO NOTE 5) AND IS PRESENT
ONLY FOR CONNECTORS WITH 2, 3 AND 4 POSITIONS).

DIVENTA 6.5 PER LA CAVITA' N. 1 SUI CONNETTORI
(BECOMES 6.5. FOR THE CAVITY N.1)

GEOMETRIA ALTERNATIVA E OPZIONALE DEL DENTINO DI AGGANCIO
(ALTERNATIVE AND OPTIONAL SHAPE FOR RETENTION TOOTH)

STATO DI FORNITURA: CONFEZIONAMENTO IN "VASSOI + SCATOLA"
(PACKAGING: "ON TRAY PLUS CARTON BOX")

PRELIMINARY- PART NOT YEST RELEASED FOR PRODUCTION

SLIDE PROFILE (WEDGE SHAPE SLOT) ON THE AREA ABOVE THE LOCKING LANCE GEOMERTY
TO FACILITATE UN-CHAINING PROCESS.

DIFFERENT CODING RIB GEOMETRY AT BOTH END.
WIDTH OF CODING RIB REDUCED TO 1.1 mm FOR ALL REAR LOCKING VERSIONS

OBSOLETE

WITHOUT 2 WIRE RETENTION HOOKS ON 2 ENDS. SEE SHEET 3

SPECIAL CIRCUITE INDENTIFICATION, WHICH IS OPPOSITE FROM STANDARD ONE. SEE SHEET 3

PEZZO FORNITO AGGANCIATO IN STICK
(CONNECTORS STACKED IN STRIP)

FROM 11.4 TO 12.4
PASSO (PITCH)

CONNETTORE CHIUSO AGGRAFFATO
(TERMINATED CONNEGTOR)

24.5 MAX.

7.8 +0.1
-0.2

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±0° 30'
FINISH

MATERIAL SEE TABLE

SEE TABLE

DWN C.CORDOLA 02DEC2008

CHK G.TURCO 02DEC2008

APVD -

PRODUCT SPEC 108-20065-1
108-20065-2

APPLICATION SPEC 114-20016
114-20016-1

WEIGHT -

CUSTOMER DRAWING

SCALE 2:1

SHEET 2 OF 3

REV E4

NAME MONO SHAPE MK I TAB
SPECIAL 2-8 POS REAR LOCKING



SIZE A3


CAGE CODE 00779


DRAWING NO C-293491

RESTRICTED TO -

PA GF, UL-V0 GWEPT 750 °C NO FLAME, NATURAL
TWO ALTERNATIVE RESINS

NO OF POS	CONFIGURATION (View from top side)	TRAY PACKAGING VERSION	PART REV	LOOSE PIECES PACKAGING VERSION	PART REV	LOCKING POSITION (Back side)	POSITION FOR POLARIZATION ON BACK SIDE (IF PRESENT)	L +0.2 -0.3 (mm)	NOTE STRIP COLOUR
2		2297762-2	D	-	-	1-2	1S-2D	9.9	-
		1-2297762-2	1	-	-	1-2	1S	9.9	-
3		2297762-3	1	-	-	1-2	1S-2D	14.9	-
3		1-2297762-3	D	-	-	1-2	1D-2S-3D	14.9	-
3		3-229762-3	1	-	-	2-3	2S	14.9	-
4		2297762-4	D	-	-	1-2, 3-4	1D-2S-3D	19.9	-
5		2297762-5	1	-	-	2-3, 4-5	2S-4S	24.9	-
8		2297762-8	1	-	-	TBD	TBD	39.9	-



NUMERO DI VIE	1 CONFIGURAZIONE (Vista connettore dall'alto)	VERSIONE PEZZI IN VASSOIO	PART REV.	VERSIONE PEZZI SCIOLTI	PART REV	POSIZIONE AGGANCIO (LATO POSTERIORE)	POSIZIONE POLARIZZAZIONE (LATO POSTERIORE) (SE PRESENTE)	L +0.2 -0.3 (mm)	NOTE MARCHIATURA CON BANDA COLORATA
NO OF POS	1 CONFIGURATION (View from top side)	TRAY PACKAGING VERSION		LOOSE PIECES PACKAGING VERSION		LOCKING POSITION (Back side)	POSITION FOR POLARIZATION ON BACK SIDE (IF PRESENT)		NOTE STRIP COLOUR
4		1-2469935-4	1	-	-	1-2, 3-4	1S,2D	19.9	-

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL

SEE TABLE

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±

1 PLC ±

2 PLC ±

3 PLC ±

4 PLC ±

ANGLES ±0° 30'

FINISH

SEE TABLE

DWN
C.CORDOLA

02DEC2008

CHK
G.TURCO

02DEC2008

APVD
-

PRODUCT SPEC

APPLICATION SPEC

WEIGHT
-

CUSTOMER DRAWING

TE Connectivity

MONO SHAPE MK I TAB
SPECIAL 2-8 POS REAR LOCKING

SIZE
A3

CAGE CODE
00779

DRAWING NO
C-293491

RESTRICTED TO
-

SCALE
2:1

SHEET
3

OF
3

REV
E4