



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	H4	REVISED PER ECR-25-255998	16SEP2025	SA	DSC

 WIRE RANGE	 Listed FILE E13288	 LR7189 Certified
16-14 AWG STRANDED	16-14 AWG STRANDED	16-14 AWG STRANDED

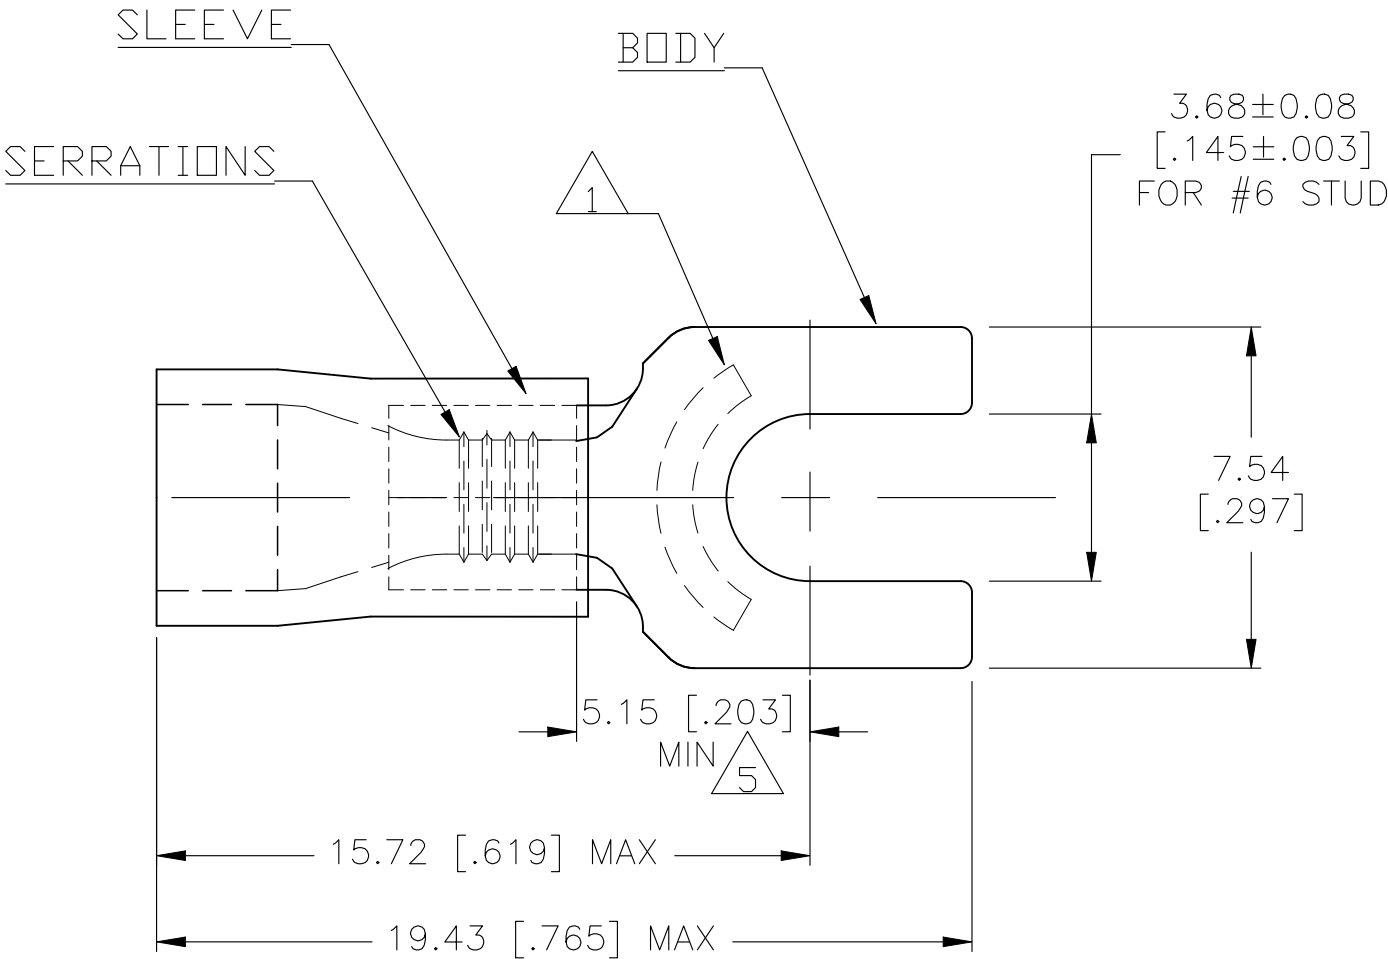

- 1 STAMP AMP 16-14* LOCATE APPROX AS SHOWN
2. WIRE INSUL DIA., 2.67-3.68 [.105-.145]
3. TONGUE MATL THK, 0.79 ±0.05 [.031±.002]
- 4 MATERIAL: BODY - CU PER ASTM B152
SLEEVE - PVC, COLOR - BLUE
- 5 APPLIES FROM THE METAL EDGE OF BARREL TO THE CENTER OF THE STUD HOLE
- 6 NOTE DELETED

100	LOOSE PIECE, BOX	8-322994-1
1 KIT = 250 PIECES	LOOSE PIECE	6-322994-0
5000	ON TAPE, REEL	2-322994-1
1000	LOOSE PIECE	322994
QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221° F]	THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN G VINSON 03NOV94	 TE Connectivity			
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: 600V MAX (1000V FIXTURE OR SIGN)	DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK M ELLIS 03NOV94	NAME TERMINAL, SPADE, PLASTI-GRIP, WIRE SIZE: 16-14 AWG			
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	CIRCULAR MIL AREA: 1.04-2.62mm² [2,050-5,180] STRANDED		0 PLC ± - 1 PLC ± - 2 PLC ± 0.20 [.008] 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH	APVD G NGO 03NOV94				
FOR ORDER ENTRY	1-800-526-5142	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.	MATERIAL 4	-	PRODUCT SPEC UL486A	SIZE A3	CAGE CODE 00779	DRAWING NO C-322994	RESTRICTED TO -
			CUSTOMER DRAWING			SCALE 6:1	SHEET 1 OF 1	REV H4	