




REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	JAN15/19	L.CHAN
B	PROPOSAL	APR29/20	L.CHAN

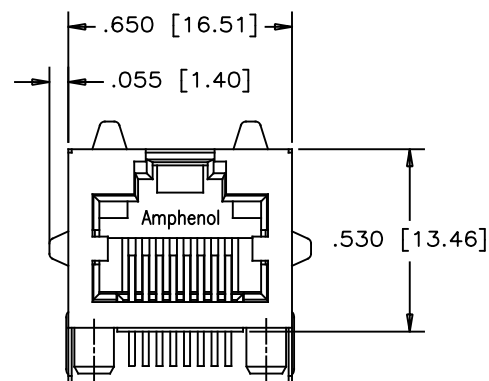


FRONT VIEW

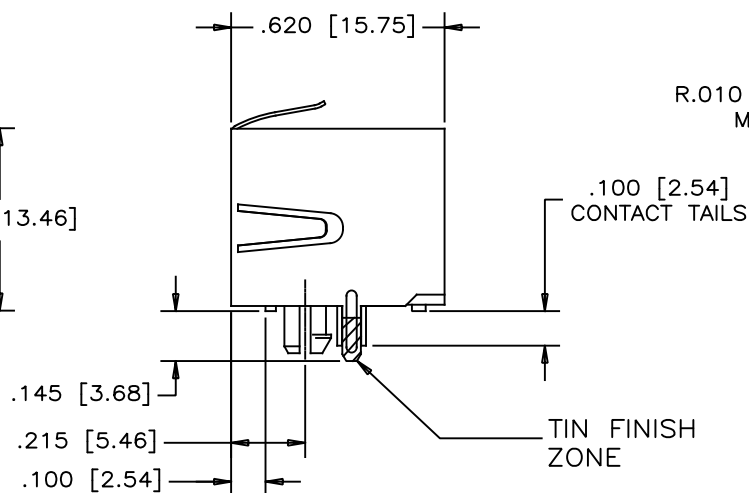

SIDE VIEW

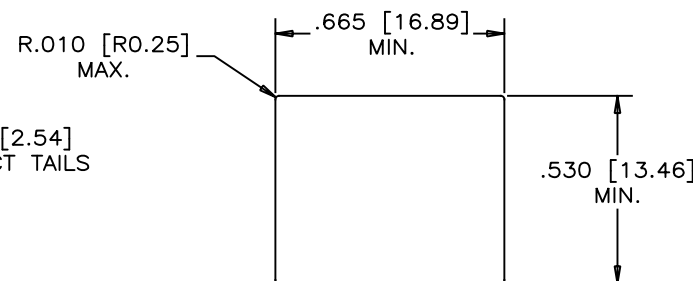

RECOMMENDED PANEL CUTOUT

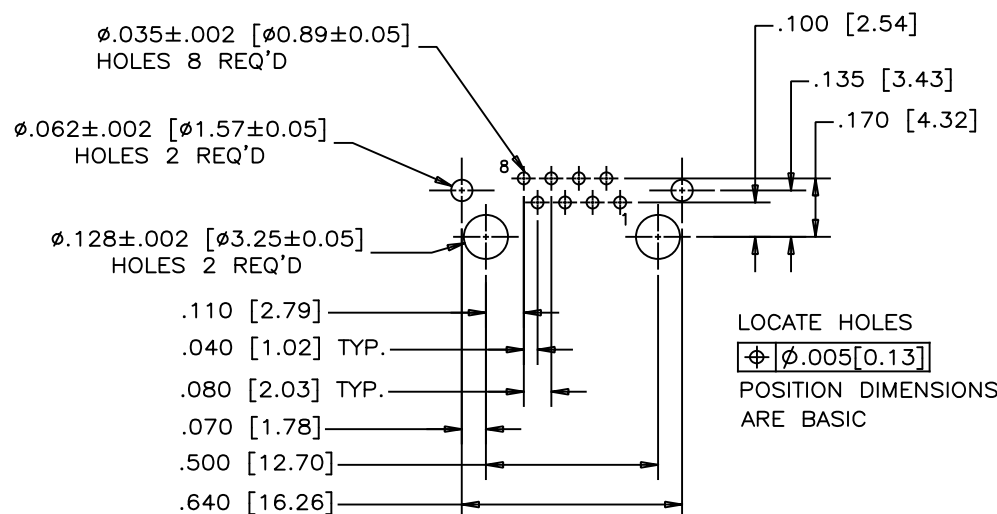

RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)

1. MATERIALS:

PLASTIC HOUSING: HIGH TEMPERATURE THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0

CONTACTS: PHOSPHOR BRONZE
PLATING: GOLD ON MATING SURFACES
(SEE PART NO. FOR THICKNESS).
50 μ" [1.27 MICRONS]
MIN. NICKEL UNDERPLATE
100 μ" [2.54 MICRONS]
MIN. MATTE TIN ON CONTACT TAILS.

SHIELD: STAINLESS STEEL WITH MATTE TIN PLATING ON SOLDER TAIL

PART NUMBER: RJHSE-X180

GOLD PLATING
E=RJ45 FLAT CONTACT 6u"
G=RJ45 FLAT CONTACT 15u"
J=RJ45 FLAT CONTACT 30u"
5=RJ45 FLAT CONTACT 50u"

UNLESS SPECIFIED OTHERWISE		DRAWN	W.QIU	DATE	JAN15/19	Amphenol Canada Corp. Commercial Products	
PRIMARY UNITS	INCH	CHECKED	L.CHAN	JAN15/19			
SECONDARY	MILLIMETER	M.E. APP'D					
REFERENCE IN PARENTHESES		Q.A. APP'D					
GENERAL TOLERANCES		DWG APPR.				TITLE HIGH SPEED, RJ45, MODULAR JACK, 8P8C, SHIELDED WITH TABS AND COVER LED AREA- RoHS COMPLIANT	
1 DECIMAL PLACE	±0.025	ENG. REL. NO.					
2 DECIMAL PLACES	±0.020	REF.					
3 DECIMAL PLACES	±0.015	THIRD ANGLE PROJECTION				DWG. NO. P-RJHSE-X180	
ANGULAR DEGREES	±1.0°	DO NOT SCALE DRAWING					
						CODE ID NO. 03554	DWG SIZE: C SCALE: N/A SHEET 1 OF 2

REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	JAN15/19	L.CHAN
B	PROPOSAL	APR29/20	L.CHAN




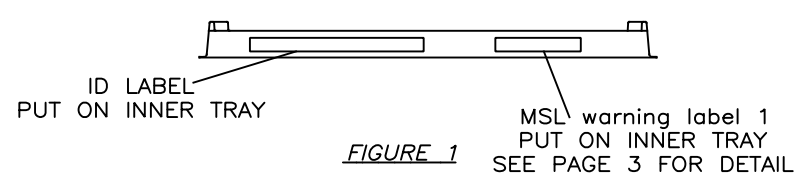


FIGURE 1

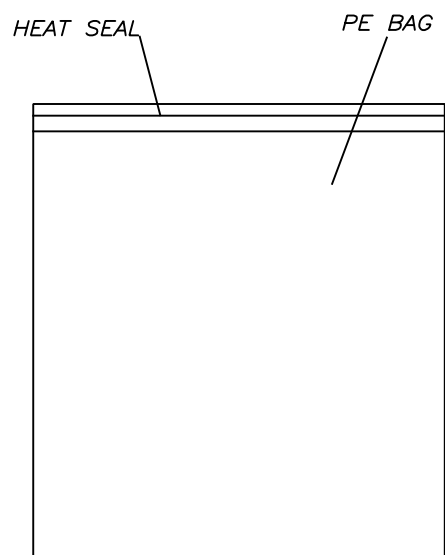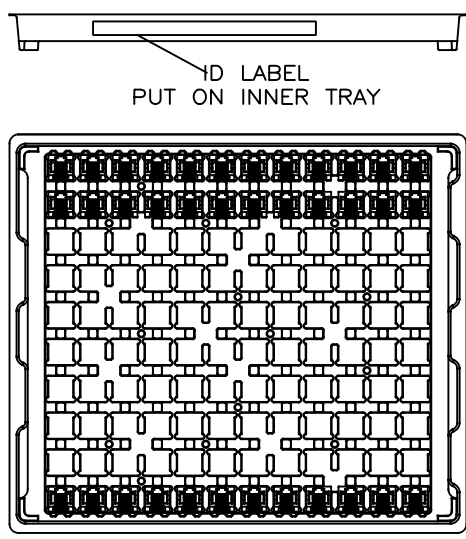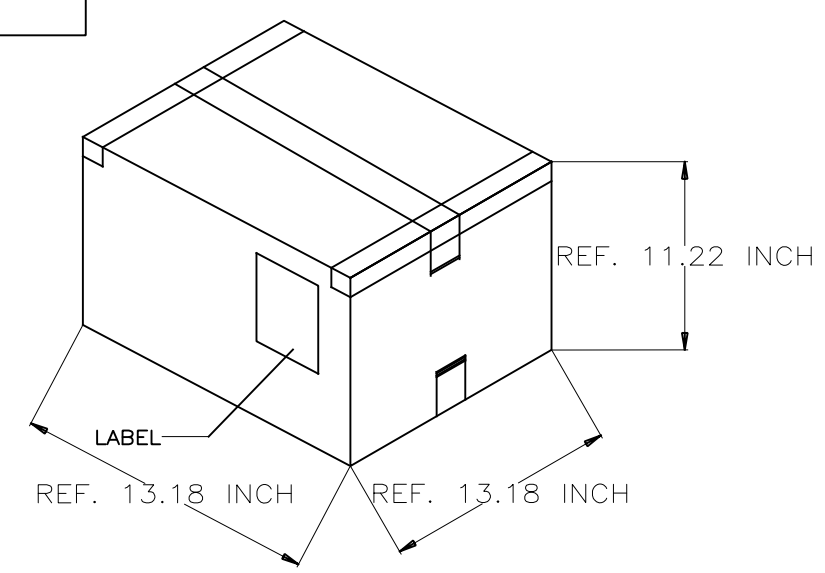

NOTES:

1. ASSEMBLE CONNECTORS INTO TRAY AS SHOWN IN FIG. 1. FULLY LOADED TRAY TO CONTAIN 120 CONNECTORS.
2. A FULLY LOADED CARTON SHOULD CONTAIN 12 TRAYS. (1440 PCS) OF CONNECTORS.
3. 12 TRAYS CONNECTORS WILL BE PACKED WITH ALUMINUM FOIL BAG, AND NEED HEAT SEAL.

UNLESS SPECIFIED OTHERWISE		DRAWN	W.QIU	DATE	JAN15/19	Amphenol Canada Corp. Commercial Products		
PRIMARY UNITS INCH		CHECKED	L.CHAN	DATE	JAN15/19			
SECONDARY MILLIMETER		M.E. APP'D				TITLE HIGH SPEED, RJ45, MODULAR JACK, 8P8C, SHIELDED WITH TABS AND COVER LED AREA- RoHS COMPLIANT		
REFERENCE IN PARENTHESES		Q.A. APP'D						
GENERAL TOLERANCES		DWG APPR.				DWG. NO. P-RJHSE-X180		
1 DECIMAL PLACE ±0.025		ENG. REL. NO.						
2 DECIMAL PLACES ±0.020		REF.				CODE ID NO. 03554 DWG SIZE: C SCALE: N/A SHEET 2 OF 2		
3 DECIMAL PLACES ±0.015		THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING				
ANGULAR DEGREES ±1.0°								