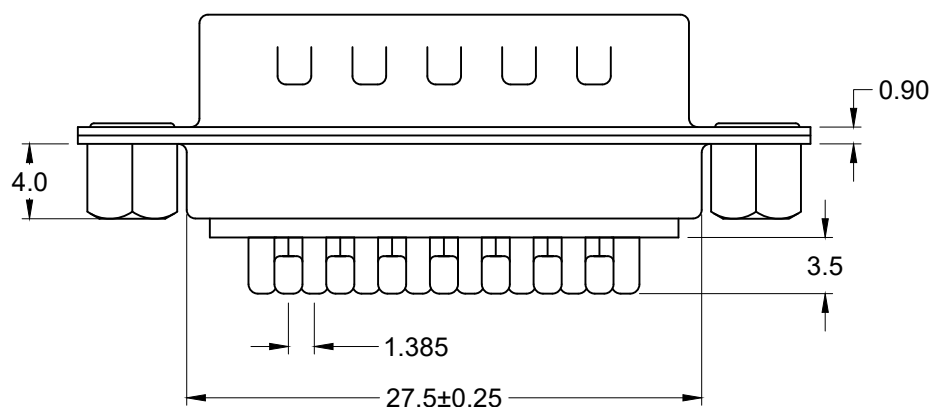
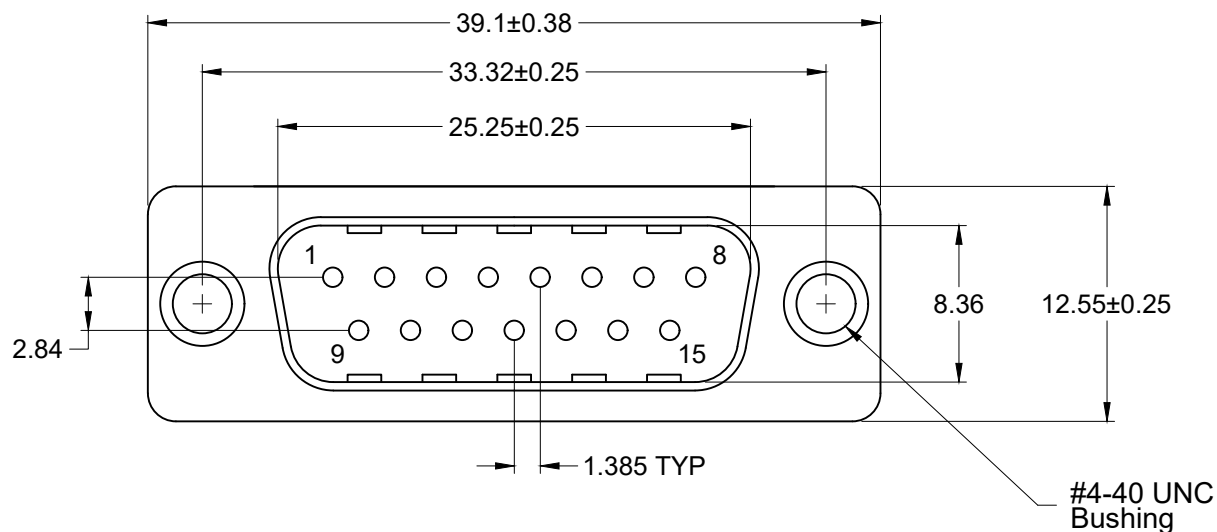


Material and Finish

Shell: steel, nickel plated
 Insulator: PBT with glass-fiber reinforcement, UL 94V-0 rated, color-black

Contact Material:

Plug: Brass

Contact Plating:

Standard:
 Gold flash on mating end, tin on termination end, with entire contact nickel underplated

-15 Option:
 15u" gold on mating end, tin on termination end, with entire contact nickel underplated

-30 Option:
 30u" gold on mating end, tin on termination end, with entire contact nickel underplated

Electrical Specifications

Rated Current: 2A

Rated Voltage: 30V RMS

Withstanding Voltage:
 500V (rms) AC for 1 minute

Insulation Resistance:
 more than 1000 Megohm at 500V DC

Contact Resistance:
 13 milliohm max.

Dielectric Strength:
 1000V for 1 minute

Operating Temperature:
 -55°C to $+105^{\circ}\text{C}$

Part Number	Contact Area Plating Finish
K85X-AA-15P-K	Gold Flash (standard)
K85X-AA-15P-K15	15u" Gold (15 option)
K85X-AA-15P-K30	30u" Gold (30 option)

RoHS COMPLIANT

cULus
 E140125

SPUS
 LR78160

Tolerances
X.X ± 0.25
X.XX ± 0.15
Unless Stated Otherwise

REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE
A1	3/9/06	New Drawing	R. Aguirre	H. MA	R. Aguirre	10/10/05
A2	1/8/08	ECO #07-052	WILL H.	H. MA		
A3	12/31/17	ECO #17-030	J. Elbanna	C. Furumasu		
A4	09/15/25	ECO #25-061	K.Wang	C.Kelleher		

K85X-AA-15P-K

Vertical Soldercup Mount D-Sub, RoHS Compliant

15 Pin Male, #4-40 UNC Bushing

