



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	H2	ECR-25-238910	04APR2025	ABS	PS


D

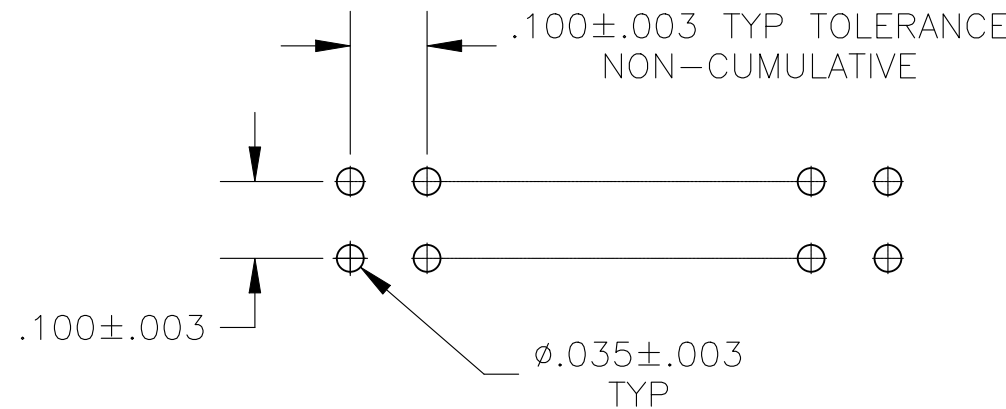

RECOMMENDED HOLE LAYOUT

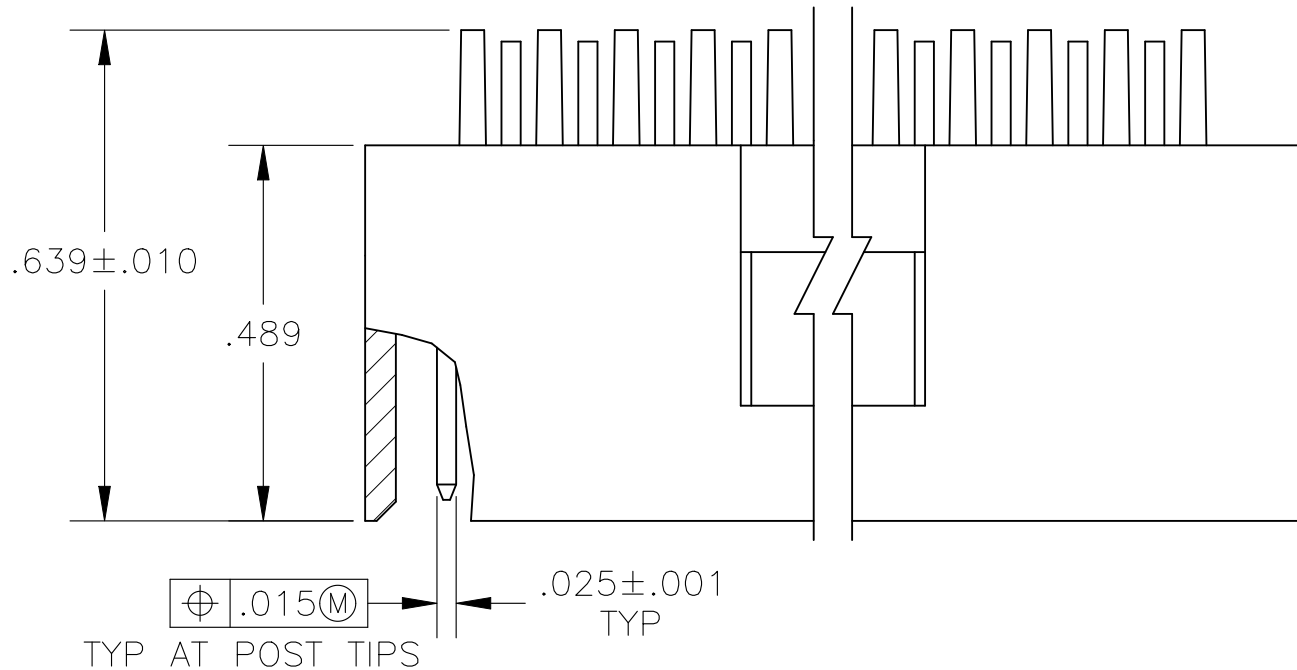

C

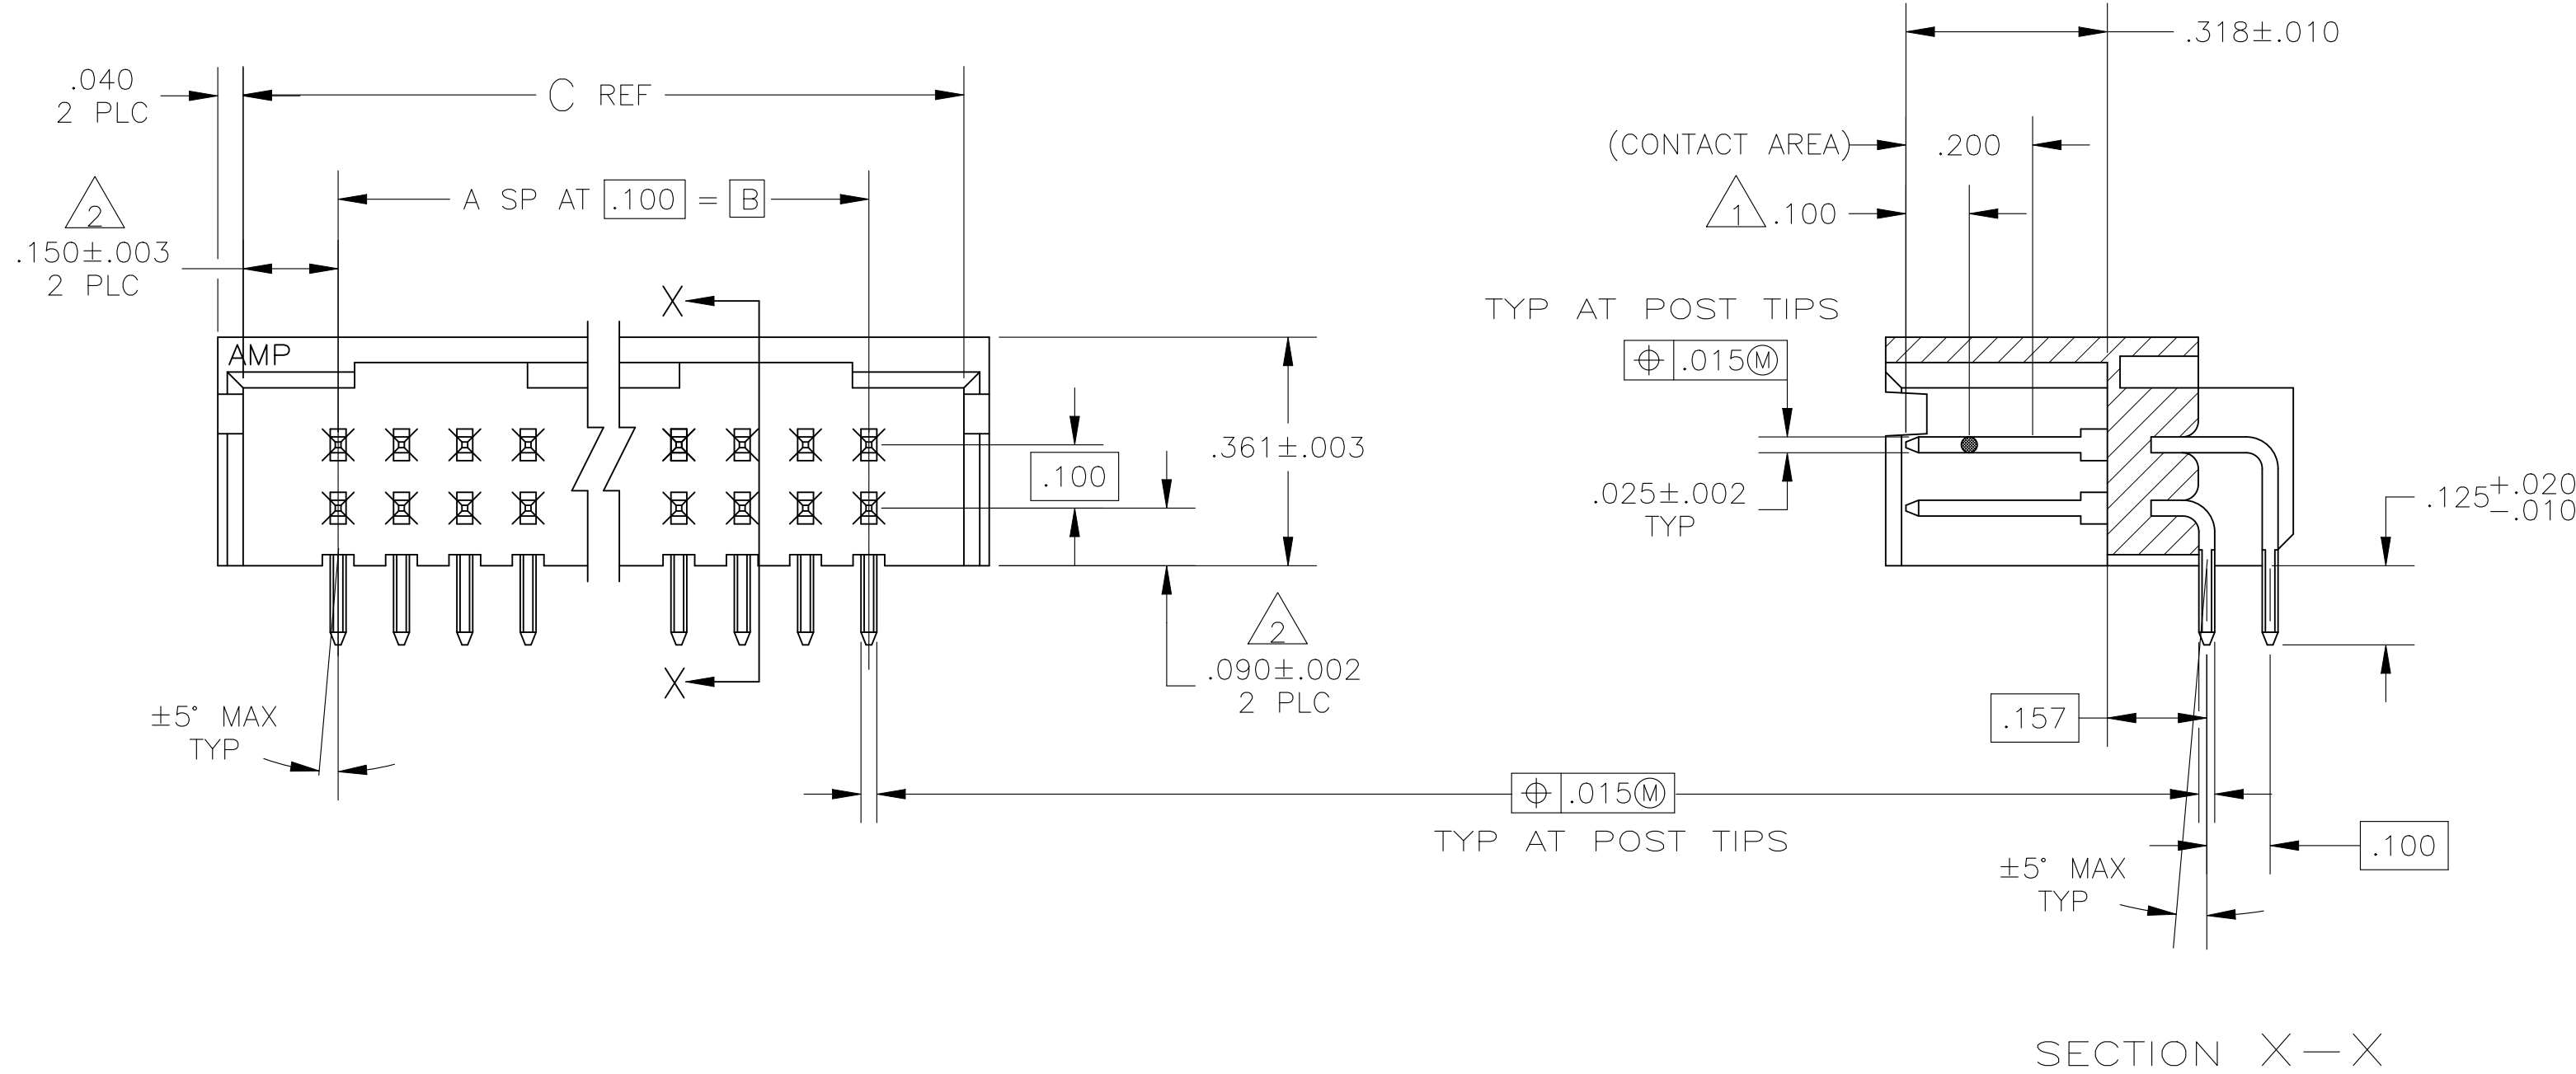

SECTION X-X

- 1 POINT OF MEASUREMENT FOR PLATING THICKNESS.
- 2 THE NOTED DIMENSION APPLIES AT THE INTERSECTION OF THE POST AND HOUSING
- 3 OBSOLETE PART NUMBERS
- 4 POSTS: .000030 GOLD IN CONTACT AREA, .000100-.000200 MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER .000050 NICKEL
- 5 POSTS: .000030 GOLD IN CONTACT AREA, .000100-.000200 MATTE TIN ON SOLDER TAIL, ALL OVER .000050 NICKEL
- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

6	OBSOLETE	5	3.200	2.900	29	60	7-103165-6
6	OBSOLETE	5	2.700	2.400	24	50	7-103165-1
	OBSOLETE	5	2.200	1.900	19	40	6-103165-6
6	OBSOLETE	5	1.900	1.600	16	34	6-103165-3
6	OBSOLETE	5	1.700	1.400	14	30	6-103165-1
	OBSOLETE	5	1.500	1.200	12	26	5-103165-9
	OBSOLETE	5	1.400	1.100	11	24	5-103165-8
	OBSOLETE	5	1.200	.900	9	20	5-103165-6
6	OBSOLETE	5	1.100	.800	8	18	5-103165-5
	OBSOLETE	5	1.000	.700	7	16	5-103165-4
	OBSOLETE	5	.900	.600	6	14	5-103165-3
6	OBSOLETE	5	.800	.500	5	12	5-103165-2
6	OBSOLETE	5	.700	.400	4	10	5-103165-1
3	OBSOLETE	4	3.800	3.500	35	72	3-103165-2
3	OBSOLETE	4	3.700	3.400	34	70	3-103165-1
3	OBSOLETE	4	3.600	3.300	33	68	3-103165-0
3	OBSOLETE	4	3.500	3.200	32	66	2-103165-9
3	OBSOLETE	4	3.400	3.100	31	64	2-103165-8
3	OBSOLETE	4	3.300	3.000	30	62	2-103165-7
6	OBSOLETE	4	3.200	2.900	29	60	2-103165-6
6	OBSOLETE	4	3.100	2.800	28	58	2-103165-5
3	OBSOLETE	4	3.000	2.700	27	56	2-103165-4
3	OBSOLETE	4	2.900	2.600	26	54	2-103165-3
3	OBSOLETE	4	2.800	2.500	25	52	2-103165-2
	OBSOLETE	4	2.700	2.400	24	50	2-103165-1
3	OBSOLETE	4	2.600	2.300	23	48	2-103165-0
3	OBSOLETE	4	2.500	2.200	22	46	1-103165-9
3	OBSOLETE	4	2.400	2.100	21	44	1-103165-8
3	OBSOLETE	4	2.300	2.000	20	42	1-103165-7
	OBSOLETE	4	2.200	1.900	19	40	1-103165-6
3	OBSOLETE	4	2.100	1.800	18	38	1-103165-5
3	OBSOLETE	4	2.000	1.700	17	36	1-103165-4
6	OBSOLETE	4	1.900	1.600	16	34	1-103165-3
3	OBSOLETE	4	1.800	1.500	15	32	1-103165-2
		4	1.700	1.400	14	30	1-103165-1
3	OBSOLETE	4	1.600	1.300	13	28	1-103165-0
		4	1.500	1.200	12	26	103165-9
		4	1.400	1.100	11	24	103165-8
3	OBSOLETE	4	1.300	1.000	10	22	103165-7
	OBSOLETE	4	1.200	.900	9	20	103165-6
6	OBSOLETE	4	1.100	.800	8	18	103165-5
	OBSOLETE	4	1.000	.700	7	16	103165-4
		4	.900	.600	6	14	103165-3
6	OBSOLETE	4	.800	.500	5	12	103165-2
	OBSOLETE	4	.700	.400	4	10	103165-1

PLATING	C	B	A	NO OF POSN	PART NUMBER
---------	---	---	---	------------	-------------

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN H MOLL 16NOV87	TE Connectivity	
DIMENSIONS: INCHES		CHK R FIEDT 16NOV87		
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .005 4 PLC ± - ANGLES ± -		APVD R FIEDT 16NOV87	PRODUCT SPEC	
MATERIAL: HOUSING: FLAME RETARDANT COLOR: BLACK POST/PIPS: BRONZE		APPLICATION SPEC		SIZE A1
FINISH: SEE TABLE		WEIGHT: —		CAGE CODE 00779
		CUSTOMER DRAWING		SCALE: 4:1
				SHEET 1 OF 1
				REV H2