



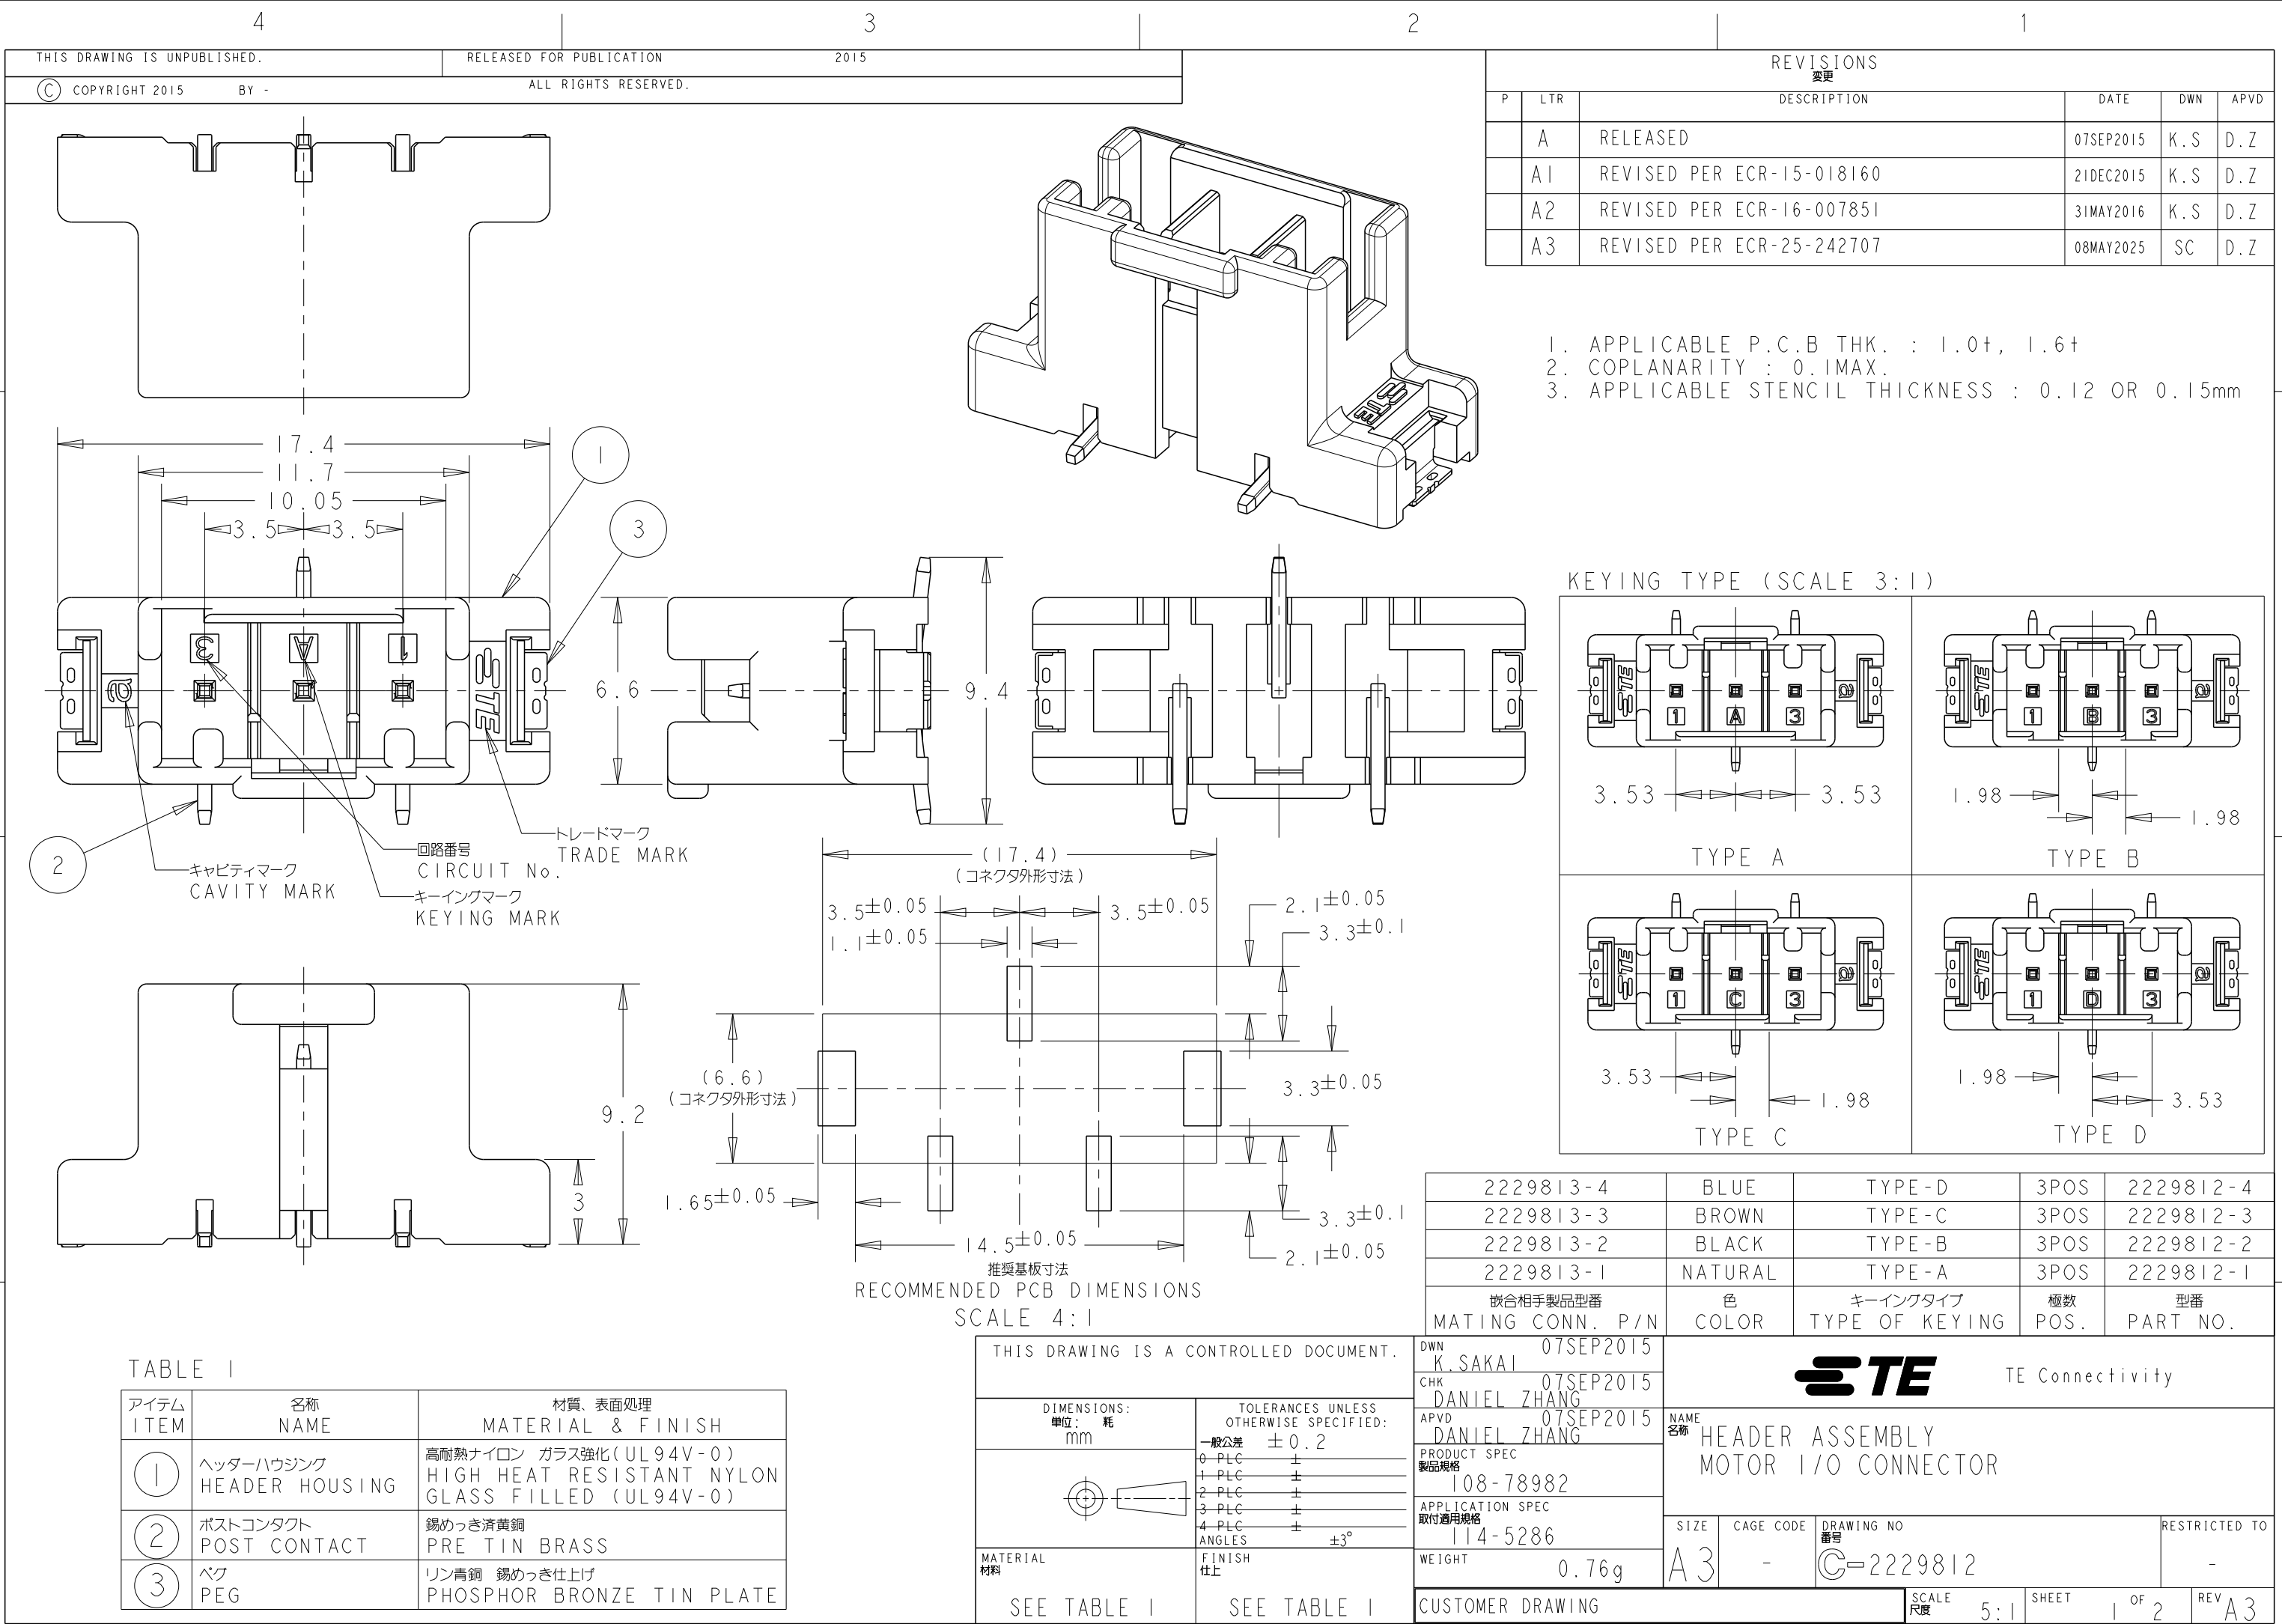


1470-19 (3/13)


REVISIONS

変更


P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

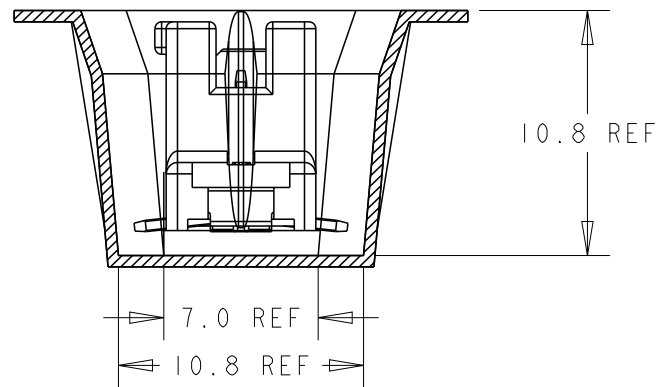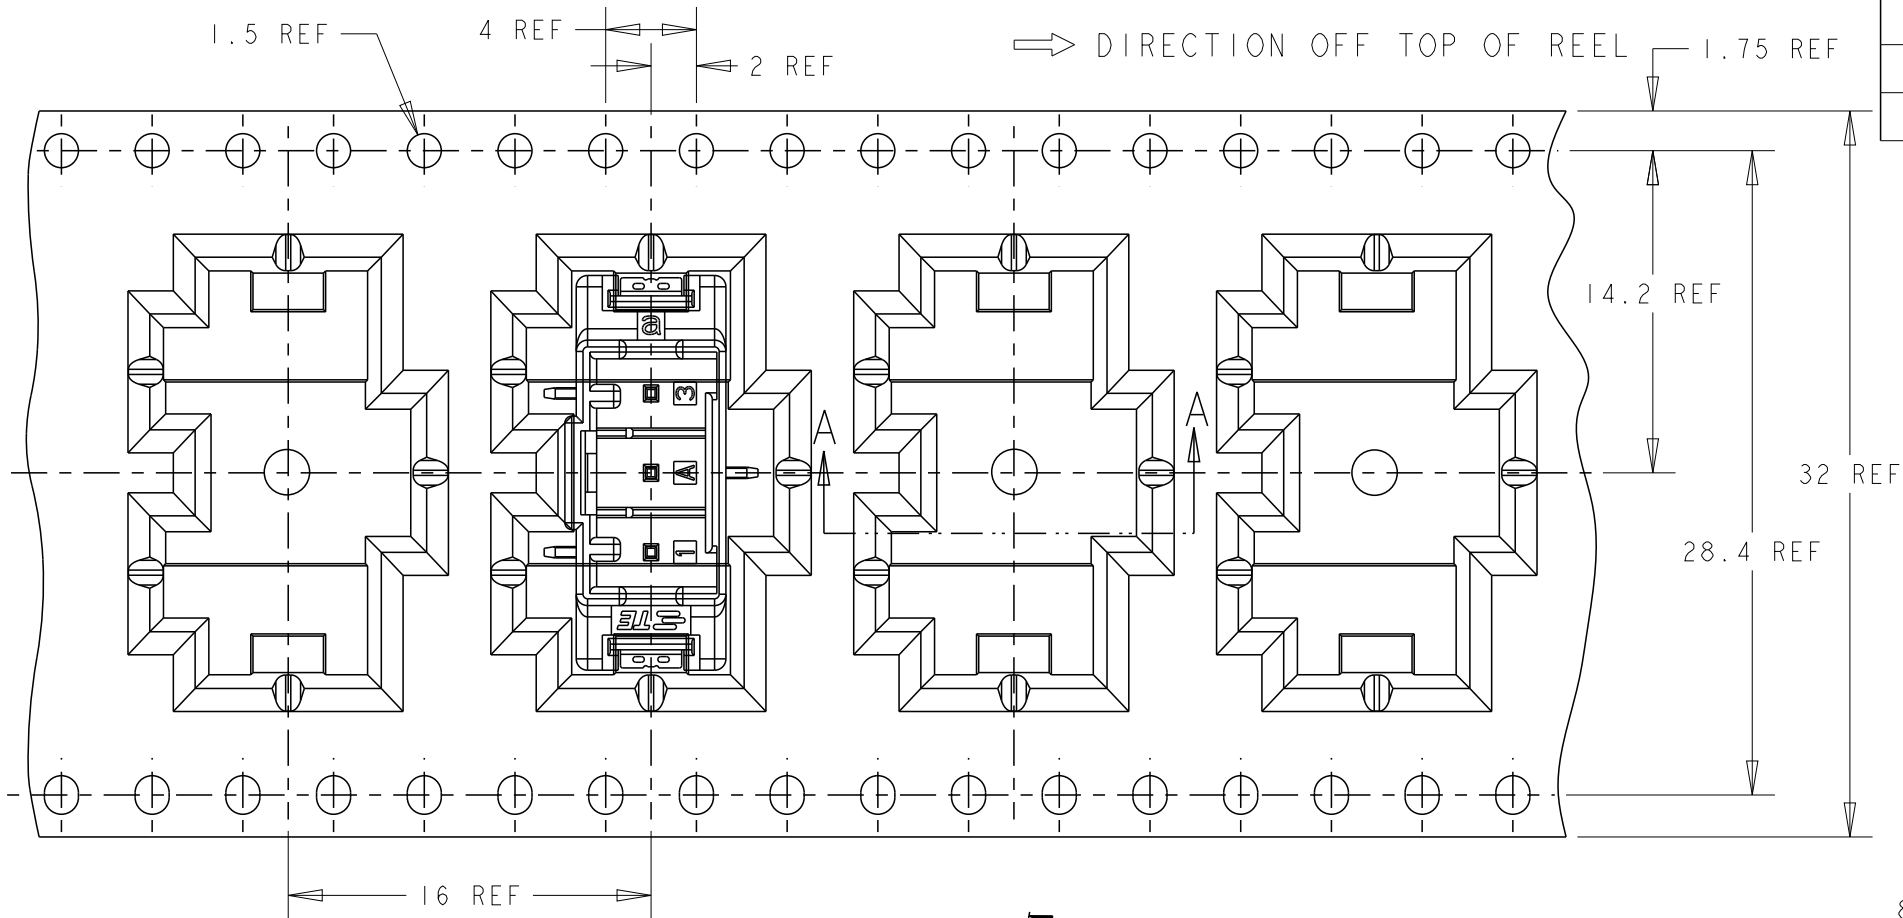


A-A

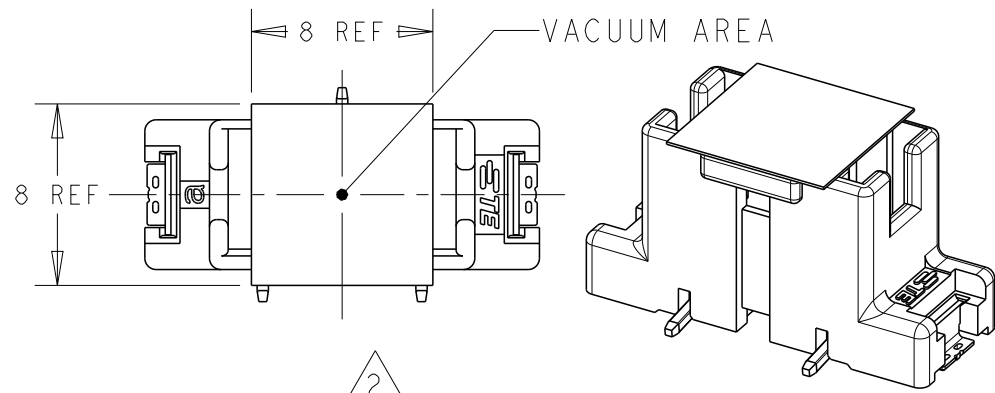

MEASURING DIRECTION FOR
PEELING STRENGTH OF POLYIMIDE TAPE

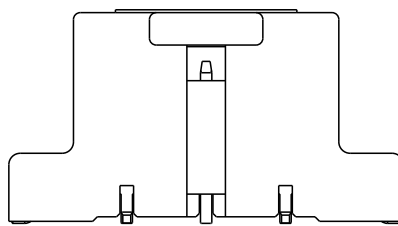

HEADER ASSEMBLY WITH POLYIMIDE TAPE

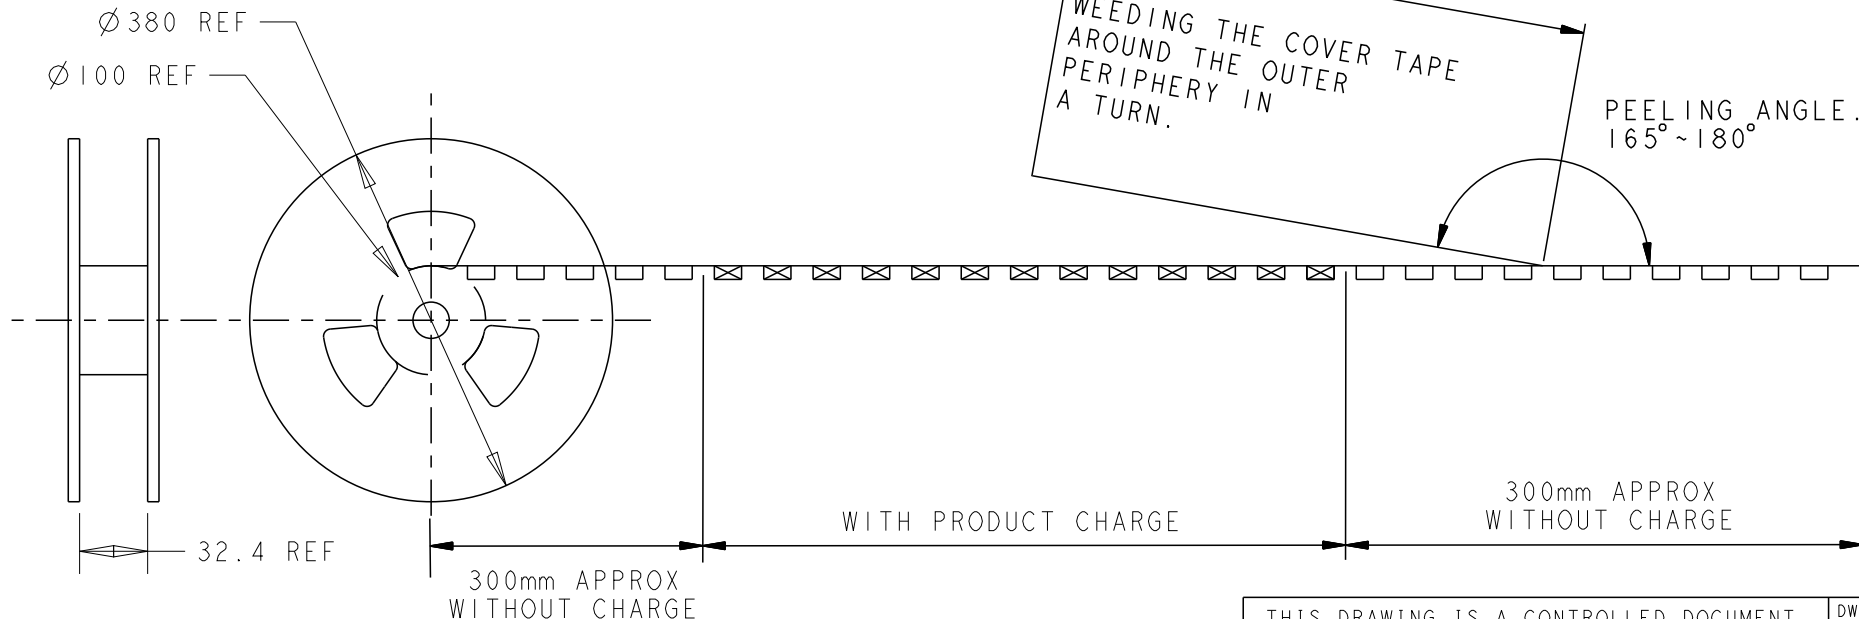

1. UNLESS OTHERWISE SPECIFIED TOLERANCE PER EIA-481.

2 PEELING STRENGTH OF POLYIMIDE TAPE : 0.1N MIN.
PEELING SPEED : 100mm/MINUTE

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: 単位: 耗 mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	一般公差 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±3°
MATERIAL 材料	FINISH 仕上

DWN	CHK	APVD	PRODUCT SPEC 製品規格	APPLICATION SPEC 取付適用規格	WEIGHT	CUSTOMER DRAWING
-----	-----	------	----------------------	----------------------------	--------	------------------



TE Connectivity

NAME
名称
HEADER ASSEMBLY
MOTOR I/O CONNECTOR

SIZE	CAGE CODE	DRAWING NO 番号	RESTRICTED TO
A3	-	C-2229812	-
SCALE 尺度	NTS	SHEET 2 OF 2	REV A3