
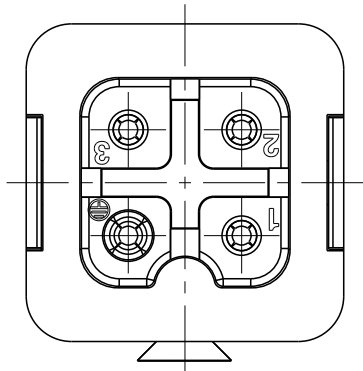
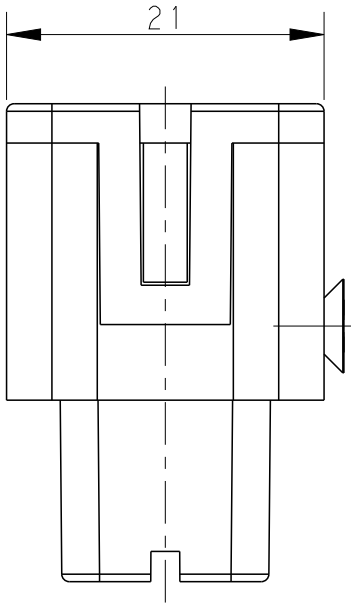
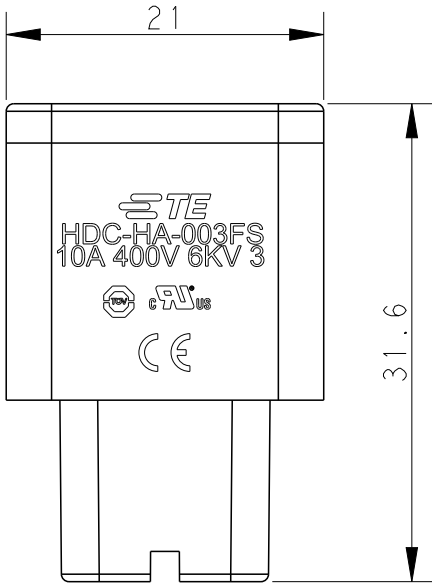
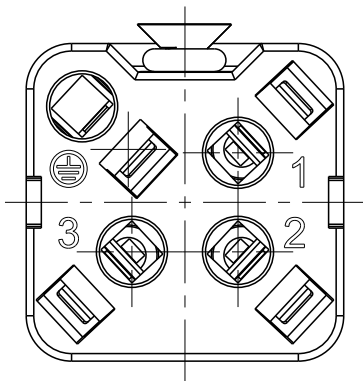



P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	ECR-15-013750	19SEP2015	DW	CW
	B1	ECR-15-016224	05NOV2015	DW	CW
	C	ECR-20-016101	09JUN2021	BS	CW
	D	ECR-25-246907	18JUN2025	ABS	RB

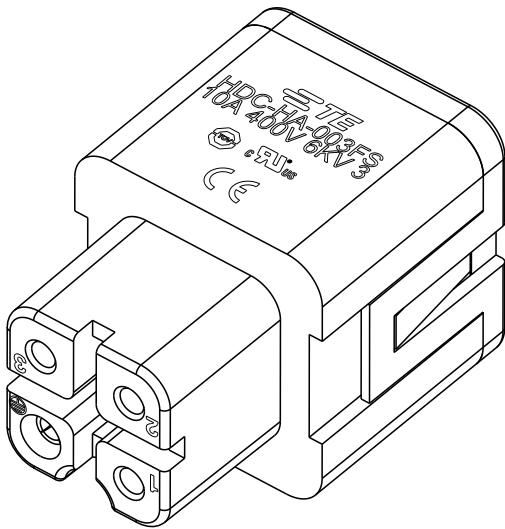

NOTES:
1. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 400 V
RATED CURRENT: 10 A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 6 KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: 0.5-2.5 mm² (20-14 AWG)
CONTACT FINISH: SILVER PLATED
CONTACT TYPE: SPRING CONTACT

M3 SCREW,
RECOMMENDED
TIGHTENING
TORQUE 0.5Nm

注释：
1. 技术参数：
绝缘材料：PC
额定电压：400V
额定电流：10A
绝缘电阻： $\geq 400M\Omega$
额定脉冲电压：6 KV
污染等级：3
阻燃等级：UL94V-0
插拔次数：500 次
接线范围：0.5-2.5 mm² (20-14 AWG)
端子表面处理：镀银
接线类型：弹片压接

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID WANG 17MAR2015		TE Connectivity					
		CHK CHRIS WANG 17MAR2015							
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME HA-003-FS					
		APVD XU XIANG 17MAR2015		SIZE A3					
		PRODUCT SPEC 108-137045						CAGE CODE 00779	
		APPLICATION SPEC 114-137045						DRAWING NO C-T2010033201000	
MATERIAL - -		FINISH - -		RESTRICTED TO -		SCALE 2:1			
				SHEET 1 OF 1		REV D			
CUSTOMER DRAWING									