


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	P3	REVISED PER ECR-25-255998	15SEP2025	SA	DSC

 WIRE RANGE	 Listed	 LR7189 Certified
16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED

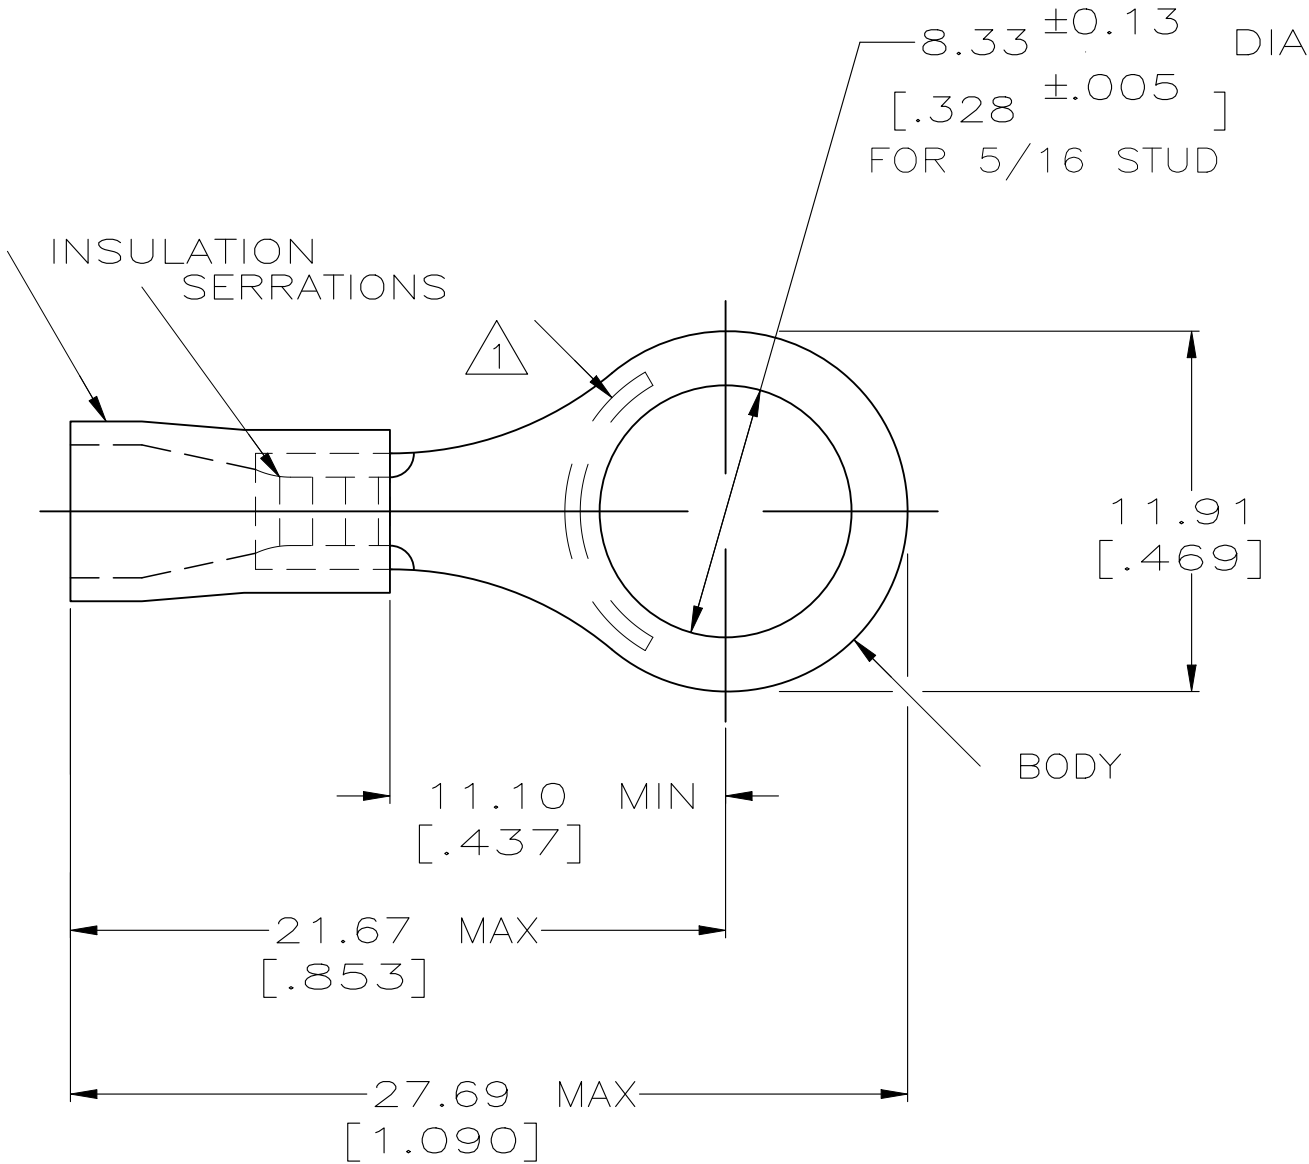

- 1 STAMP AMP 16-14* APPROX AS SHOWN
- 2 WIRE INSULATION DIA: 3.00-4.90 [0.118-0.193]
- 3 TONGUE MATERIAL THK: 0.79 ±0.05 [0.031 ±0.002]
- 4 MATERIAL: BODY - CU PER ASTM B152
SLEEVE - PVC, COLOR - BLUE
- 5 NOTE DELETED
- 6 NOTE DELETED

1 KIT = 250 PIECES	LOOSE PIECE	4 6-34163-0
100	LOOSE PIECE, BOX	4 8-34163-1
4000	ON TAPE, REEL	4 2-34163-1
-	LOOSE PIECE	4 34163
QTY	PACKAGE TYPE	PART NO.

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS			MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221° F]		THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DK SCHRUM 08/06/92		 TE Connectivity												
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS		PRODUCT INFORMATION CENTER 1-800-522-6752		VOLTAGE RATING: N/A		DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.20[.008] 3 PLC ± - 4 PLC ± - ANGLES ± -		APVD M ELLIS 11/10/92		NAME TERMINAL, RING TONGUE, PLASTI-GRIP, WIRE SIZE: 16-14 AWG									
FOR APPLICATION TOOLING INFORMATION		TOOLING ASSISTANCE CENTER 1-800-722-1111		CIRCULAR MIL AREA: 1.04-2.62mm² [2,050-5,180] SOLID OR STRANDED						PRODUCT SPEC 108-1034		APPLICATION SPEC NOT AVAILABLE		SIZE A3		CAGE CODE 00779		DRAWING NO C-34163		RESTRICTED TO -	
FOR ORDER ENTRY		1-800-526-5142		THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		SEE NOTES		TIN PER ASTM B545		WEIGHT -		CUSTOMER DRAWING				SCALE 4:1		SHEET 1 OF 1		REV P3	