

4


3

2

1


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	H3	REVISED PER ECR-25-255998	15SEP2025	SA	DSC

 WIRE RANGE	 Listed	 LR7189 Certified
16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED

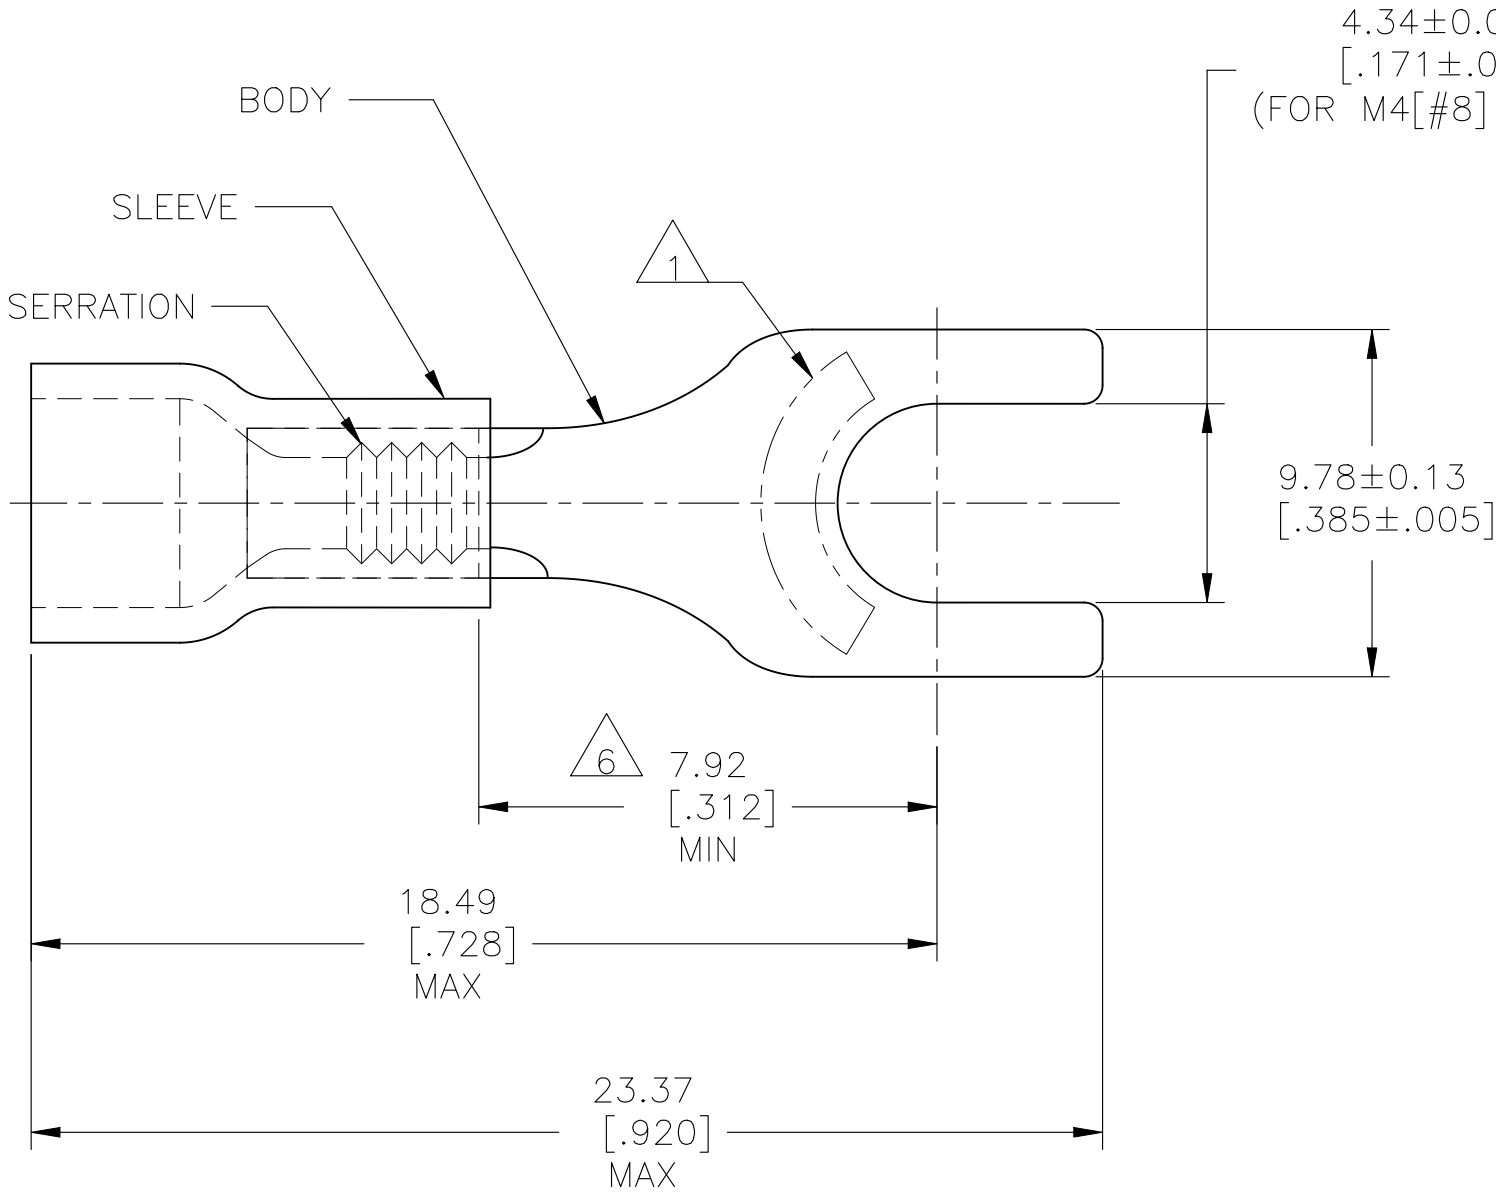

100	LOOSE PIECE, BOX	8-34166-1
1 KIT = 250 PIECES	LOOSE PIECE	6-34166-0
5000	ON TAPE, REEL	2-34166-1
1000	LOOSE PIECE	34166
QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221°F]
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	VOLTAGE RATING: 600V MAX (1000V FIXTURE OR SIGN)
FOR ORDER ENTRY	1-800-526-5142	CIRCULAR MIL AREA: 1.04-2.62mm²[2,050-5,180] SOLID OR STRANDED

THIS DRAWING IS A CONTROLLED DOCUMENT.	
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± - 1 PLC ± - 2 PLC ± 0.20 [.008] 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH
MATERIAL 	

DWN L OLMEDA 03NOV94	 TE Connectivity			
CHK M ELLIS 03NOV94				
APVD G NGO 03NOV94	NAME TERMINAL, SPADE, PLASTI-GRIP, WIRE SIZE: 16-14 AWG			
PRODUCT SPEC UL486A	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
APPLICATION SPEC -	A3	00779	C-34166	-
WEIGHT -	CUSTOMER DRAWING		SCALE 6:1	SHEET 1 OF 1
		REV H3		