
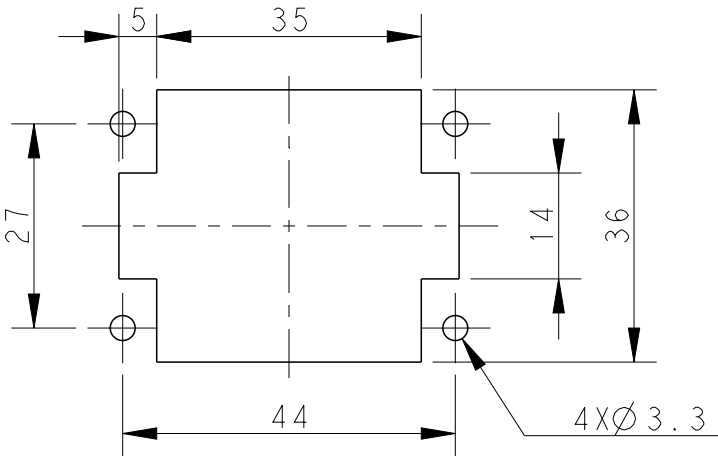


P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	ECR-15-013759	12OCT2015	DW	CW
	B1	ECR-16-015492	16NOV2016	QY	CW
	C	ECR-21-106515	09JUL2021	SQ	CW
	D	ECR-25-246909	23JUN2025	ABS	RB


- NOTES:
1. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 500V
RATED CURRENT: 16A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 6KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: $0.14mm^2 \sim 4mm^2$ (AWG26-AWG12)
CONTACT TYPE: CRIMP CONTACT
 2. CONTACTS NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING: T20300X20XX000)

- 注释:
1. 技术参数:
绝缘材料: PC
额定电压: 500V
额定电流: 16A
绝缘电阻: $\geq 400M\Omega$
脉冲电压: 6KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
接线范围: $0.14mm^2 \sim 4mm^2$ (AWG26-AWG12)
接线类型: 冷压接
 2. 端子需要单独订购.
(订货号参考图面: T20300X20XX000)



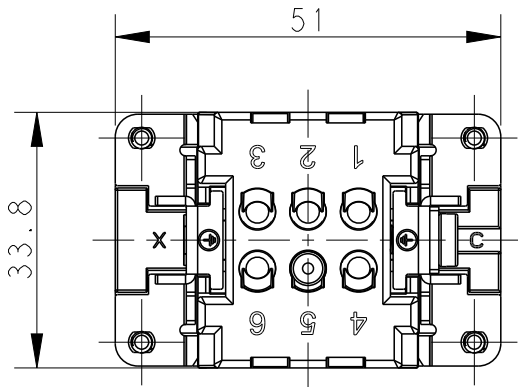


PANEL CUT FOR INSERTS FOR USING
WITHOUT HOODS/ HOUSINGS
不使用防护外壳时芯件的安装开孔图


4X M3 SCREW, RECOMMENDED
TIGHTENING TORQUE 0.5Nm
4X M3螺丝, 推荐锁紧力矩0.5Nm

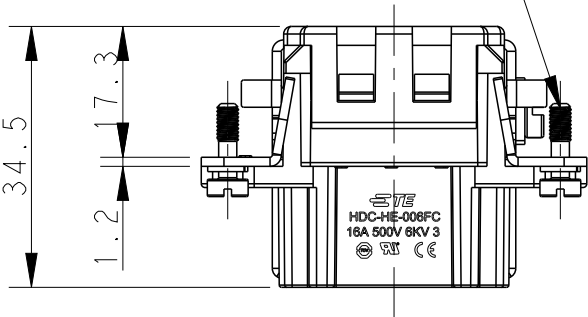

M4 SCREW, RECOMMENDED
TIGHTENING TORQUE 1.2Nm
M4螺丝, 推荐锁紧力矩1.2Nm

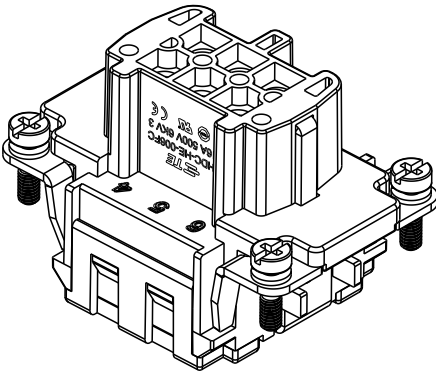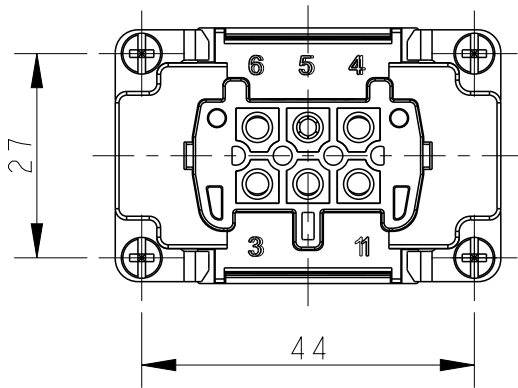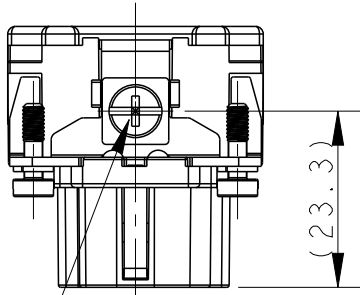

TYPE-I, T2040064201-000, TE LOGO
类型-I, T2040064201-000, TE LOGO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN Gino.Yao 06APR2015		 TE Connectivity			
		CHK Chris.Wang 06APR2015					
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD Xiang.Xu 06APR2015		NAME HE-006-FC	
		0 PLC ±-		PRODUCT SPEC		SIZE A3	
		1 PLC ±-		108-137044			
		2 PLC ±-		APPLICATION SPEC		CAGE CODE	
		3 PLC ±-		114-137044		DRAWING NO	
		4 PLC ±-		WEIGHT		RESTRICTED TO	
		ANGLES ±-		-		-	
MATERIAL		FINISH		A300779			
-		-		C-T2040064201000			
-		-		SCALE			
				1:1			
				SHEET			
				1 OF 2			
				REV			
				D			
				CUSTOMER DRAWING			






REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

NOTE:

SEE SHEET 1


注释：
见页 1

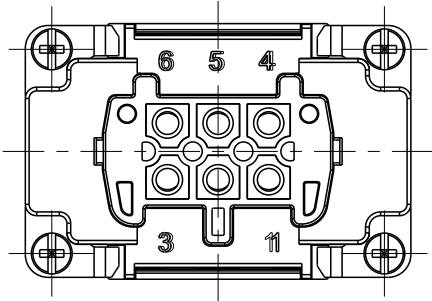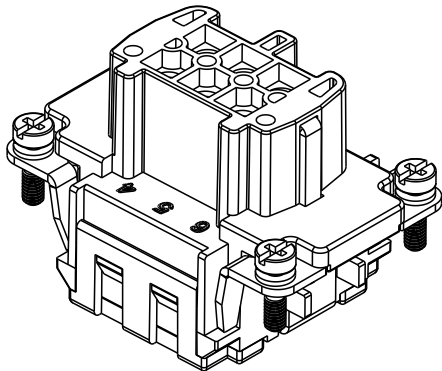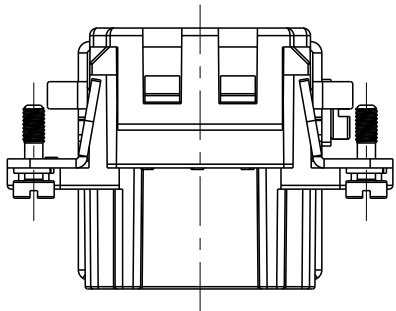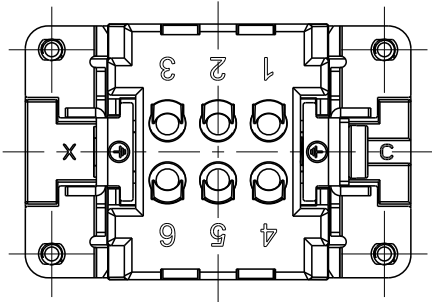

TYPE-2,T2040064201-001,STAINLESS STEEL SCREW,NO LOGO
类型-2,T2040064201-001,不锈钢螺丝,无LOGO

ALL SPEC DIMENSION REFER TO TYPE 1
所有产品规格尺寸参照 TYPE 1

T2040064201-001	HE-006-FC	HE-006 FEMALE INSERT,CRIMPING,STAINLESS STEEL SCREW,NO LOGO HE-006母插,冷压针,不锈钢螺丝,无LOGO	TYPE-2 类型-2
T2040064201-000	HE-006-FC	HE-006 FEMALE INSERT,CRIMPING HE-006母插,冷压针	TYPE-1 类型-1
PART NUMBER 料 号	PART DESCRIPTION 描 述		TYPE 类 型

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN Gino.Yao 06APR2015	 TE Connectivity			
		CHK Chris.Wang 06APR2015				
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±- FINISH	APVD Xiang.Xu 06APR2015	NAME HE-006-FC			
		PRODUCT SPEC 108-137044				
MATERIAL - -		APPLICATION SPEC 114-137044	SIZE A3	CAGE CODE 00779	DRAWING NO C-T2040064201000	RESTRICTED TO -
		WEIGHT -				
		CUSTOMER DRAWING	SCALE 1:1	SHEET 2 OF 2	REV D	