
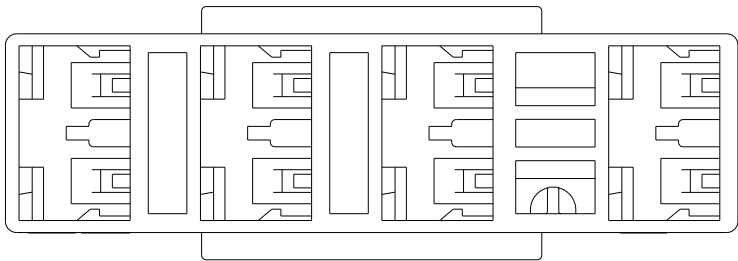
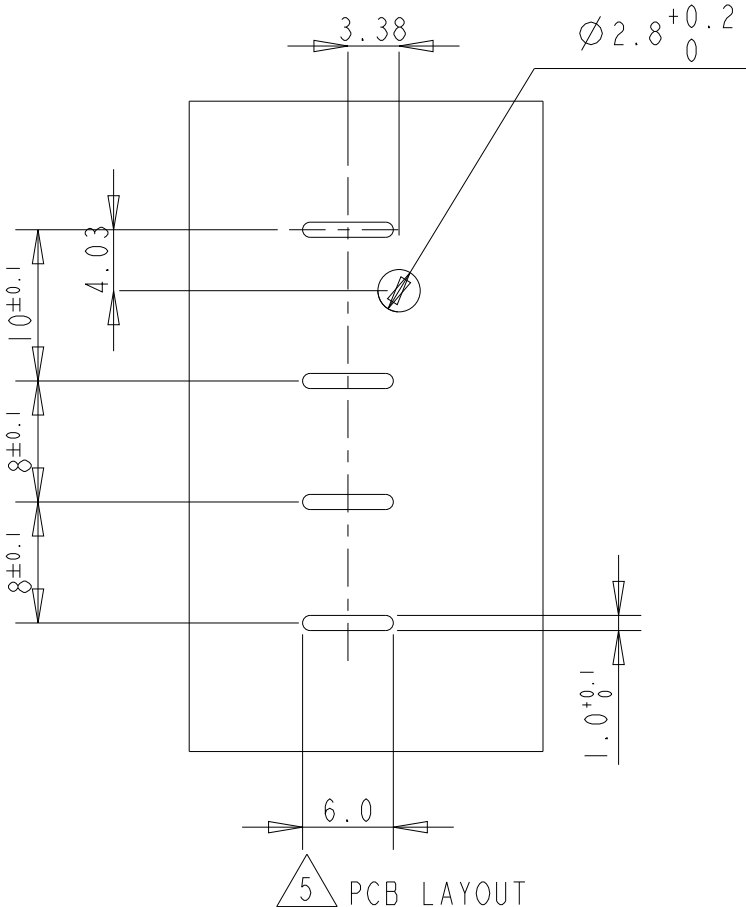
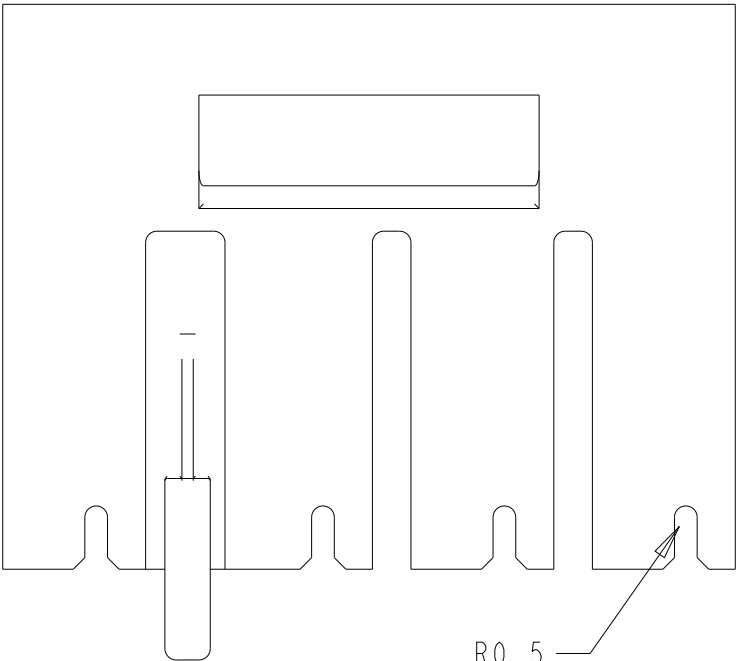
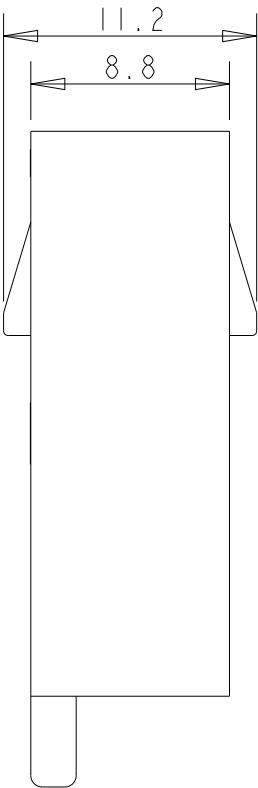


P	LTR	DESCRIPTION	DATE	DWN	APVD
	AI	REVISED PER ECR-26-274363	26MAR2026	AG	DT

NOTE:
1.APPLICABLE CONTACT PN: 2379911-1
2.MATERIAL: PBT UL94 V-0
3.GWT 750 VERSION, ACCORDING TO IEC 60335-1
4.THE TAB MUST BE PERPENDICULAR TO THE PCB WITHIN THE TOLERANCE 90°+/-2°

5.PCB LAYOUT WHEN USING TAPING TAB: 2358709-1

SCALE 2:1

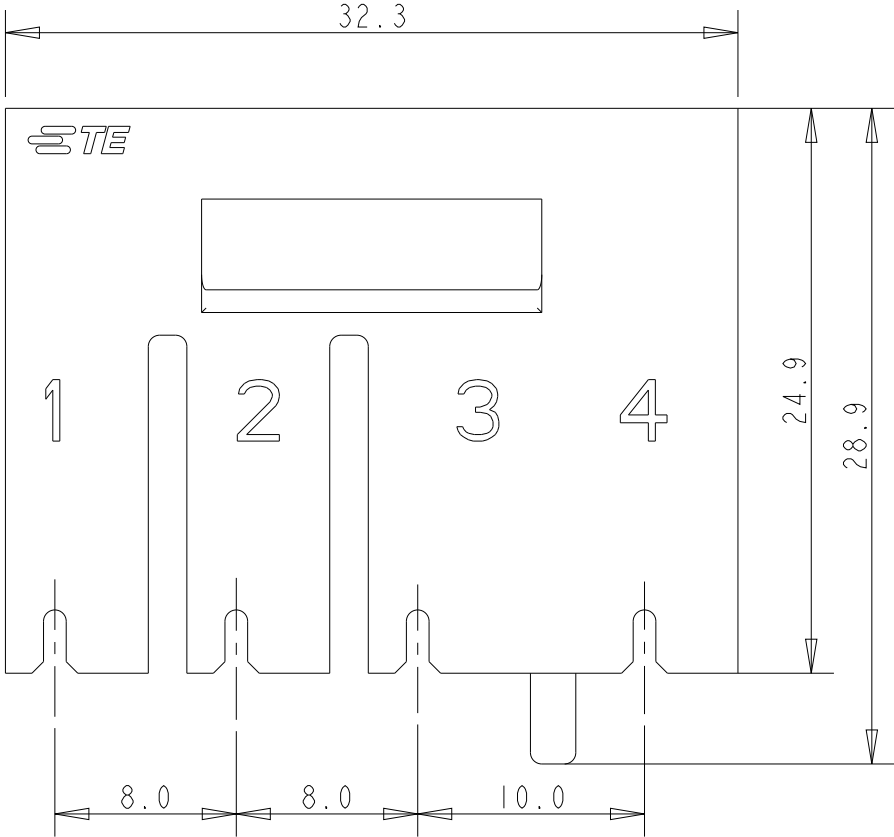

NATURAL	PBT	2380041-1
COLOR	MATERIAL	PN

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	07DEC2020	 TE Connectivity		
		CHK	07DEC2020			
		APVD	07DEC2020			
		PRODUCT SPEC	108-106568			
		APPLICATION SPEC	-	NAME		
		WEIGHT	-	250 HSG. F-SPRING REC.10mm/8mm 4P		
		CUSTOMER DRAWING		SIZE	CAGE CODE	DRAWING NO
				A3	00779	C-2380041
				SCALE	SHEET	OF
				1:1	1	1
				REV	AI	