


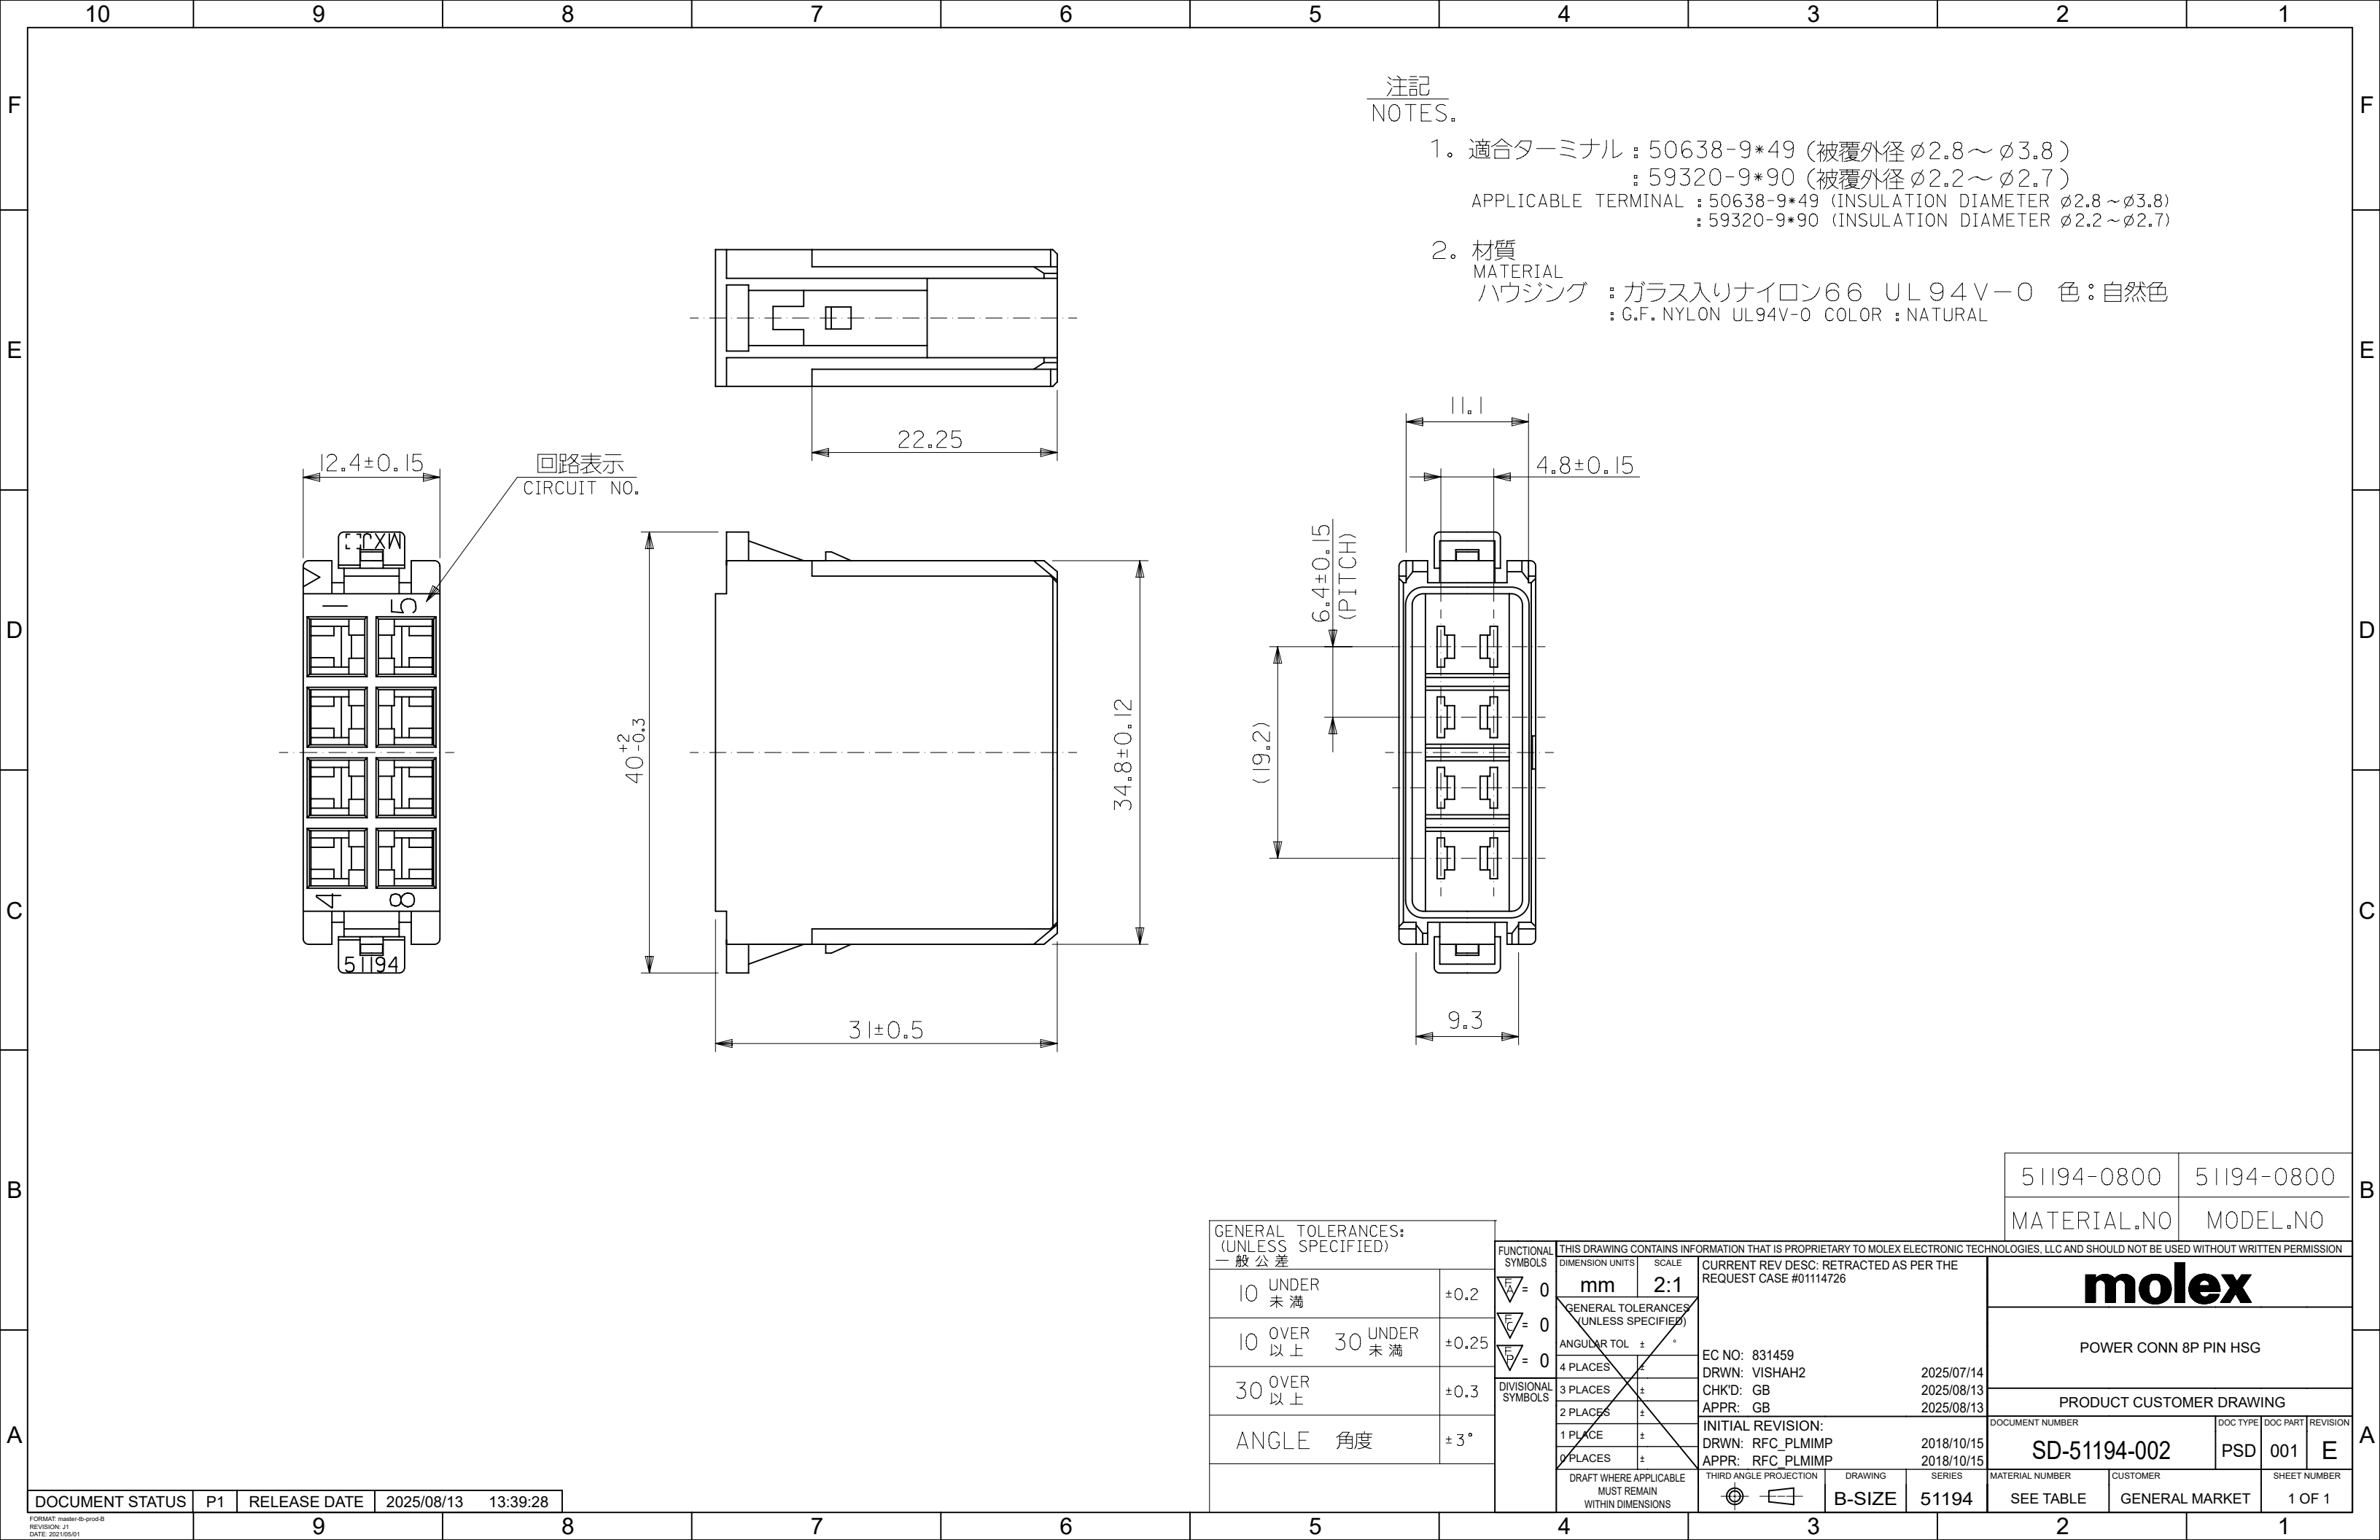

注記
NOTES.

1. 適合ターミナル : 50638-9*49 (被覆外径 ϕ 2.8 ~ ϕ 3.8)
: 59320-9*90 (被覆外径 ϕ 2.2 ~ ϕ 2.7)
APPLICABLE TERMINAL : 50638-9*49 (INSULATION DIAMETER ϕ 2.8 ~ ϕ 3.8)
: 59320-9*90 (INSULATION DIAMETER ϕ 2.2 ~ ϕ 2.7)
2. 材質
MATERIAL
ハウジング : ガラス入りナイロン66 UL94V-0 色: 自然色
: G.F. NYLON UL94V-0 COLOR : NATURAL

GENERAL TOLERANCES: (UNLESS SPECIFIED) 一般公差			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
10 UNDER 未 満	±0.2	FUNCTIONAL SYMBOLS FA = 0 FB = 0 FC = 0 FD = 0 DIVISIONAL SYMBOLS	DIMENSION UNITS	SCALE	CURRENT REV DESC: RETRACTED AS PER THE REQUEST CASE #01114726				molex POWER CONN 8P PIN HSG							
10 OVER 以 上	30 UNDER 未 満		±0.25	mm									2:1			
			±	°									EC NO: 831459		2025/07/14	
			±	±									DRWN: VISHAH2		2025/08/13	
30 OVER 以 上	±0.3		ANGULAR TOL		CHKD: GB				2025/08/13							
			4 PLACES	±	APPR: GB				2025/08/13							
			3 PLACES	±	INITIAL REVISION:				DOCUMENT NUMBER							
			2 PLACES	±	DRWN: RFC_PLMIMP				SD-51194-002							
			1 PLACE	±	APPR: RFC_PLMIMP				DOC TYPE							
			0 PLACES	±	2018/10/15				DOC PART							
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	REVISION					
							B-SIZE	51194	SEE TABLE	GENERAL MARKET	E					
											1 OF 1					