

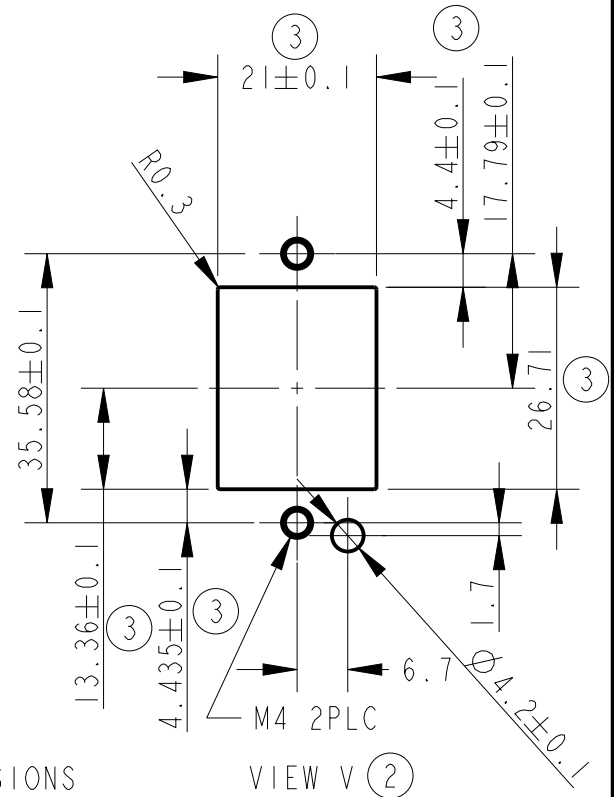
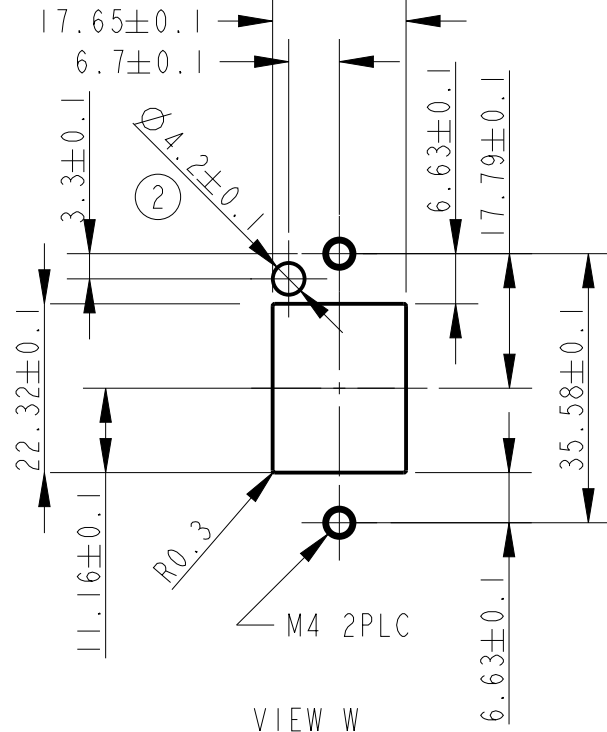
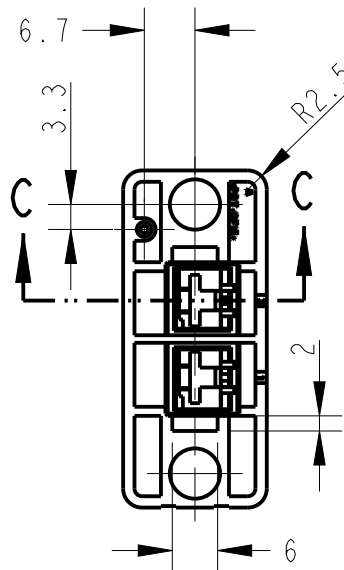
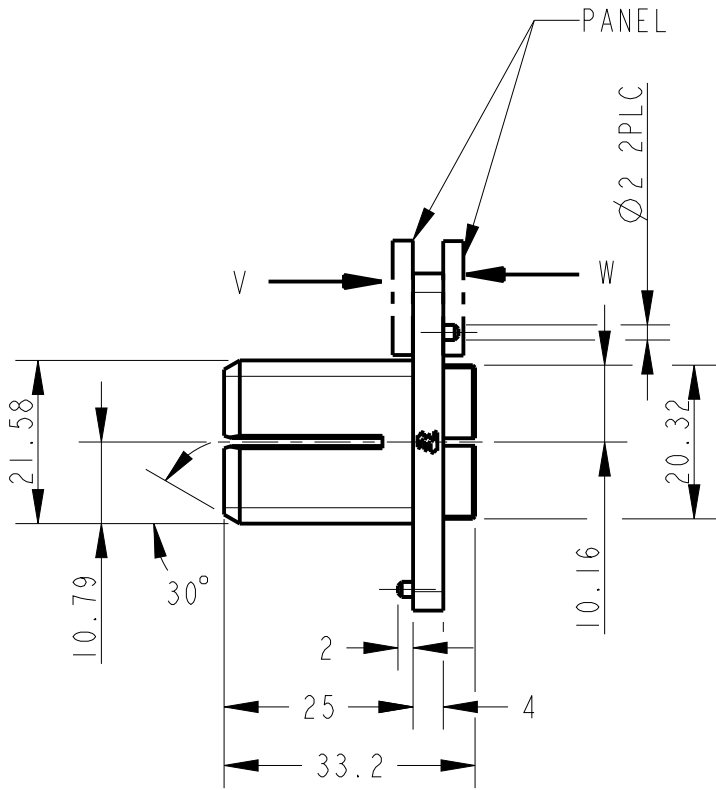
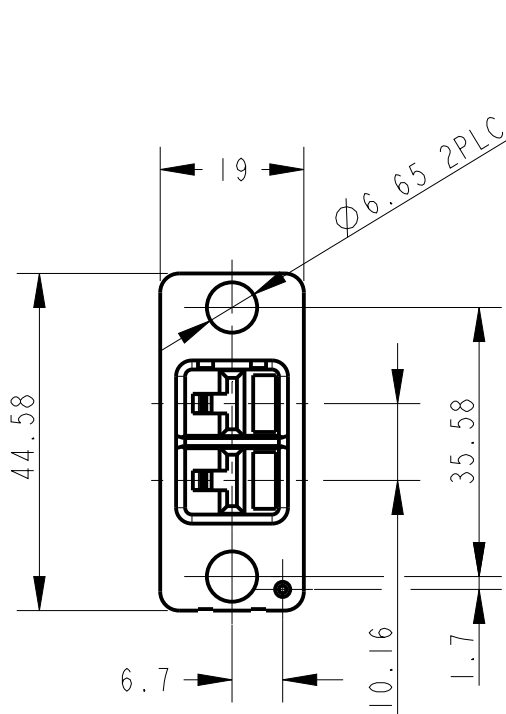



P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	REVISED ECR-05-001347	05APR05	C.Z	I.E
	AI	REVISED ECR-20-018119	29DEC2020	A.W	R.B

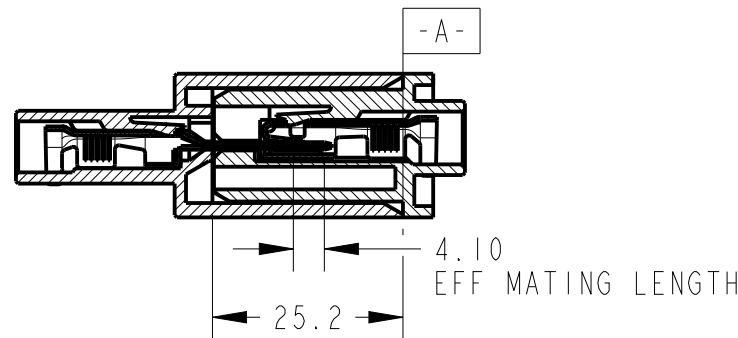

PANEL CUT DIMENSIONS
(CONNECTOR MATING SIDE)
RECOMMENDED PANEL THK: 1.0~1.6mm

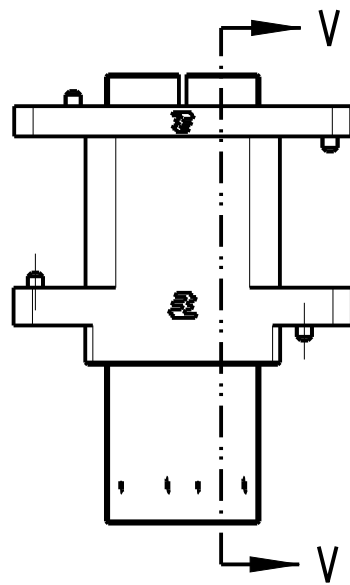

SECTION C-C

NOTES:
1. APPLICABLE CONNECTOR & CONTACTS:

CIRCUIT TYPE	FINISH	AWG	APPLICABLE CONNECTOR/ CONTACT P/N	REMARKS
HIGH CURRENT CIRCUITS	GOLD PLT	#10-12	179956-X	STRIP
		#14-16	179955-X	STRIP

- 2 MATERIAL:
HOUSING: PBT G.F. UL94V-0 COLOR: BLACK
3. MATING COUNTER P/N: 292352-1
4. RECOMMENDED SCREW LOCKING TORQUE: 10~15kgf·cm (0.98~1.47Nm)

2	292353-1
No. OF POSITIONS (HIGH CURRENT)	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
	0 PLC ±0.25
	1 PLC ±0.25
	2 PLC ±0.25
	3 PLC ±0.25
	4 PLC ±0.25
	ANGLES ±3°
MATERIAL	FINISH
2	-

DWN	ROY HAO	09APR04
CHK	STEVEN YAO	09APR04
APVD	T. SASAKI	09APR04
PRODUCT SPEC	108-51030	
APPLICATION SPEC	114-51009	
WEIGHT	-	
CUSTOMER DRAWING		



REC HOUSING FOR 1.5mm PITCH MINI CT
HIGH CURRENT HYBRID DRAWER CONNECTOR

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-292353	
SCALE	1:1	SHEET	OF
			REV AI