



NOTES

- 梱包数量： 3000個 / リール
NUMBER OF CONNECTORS : 3000 PCS/REEL.
- リードテープ長さ
LEAD TAPE LENGTH

引き出し方向
PULL OUT
DIRECTION

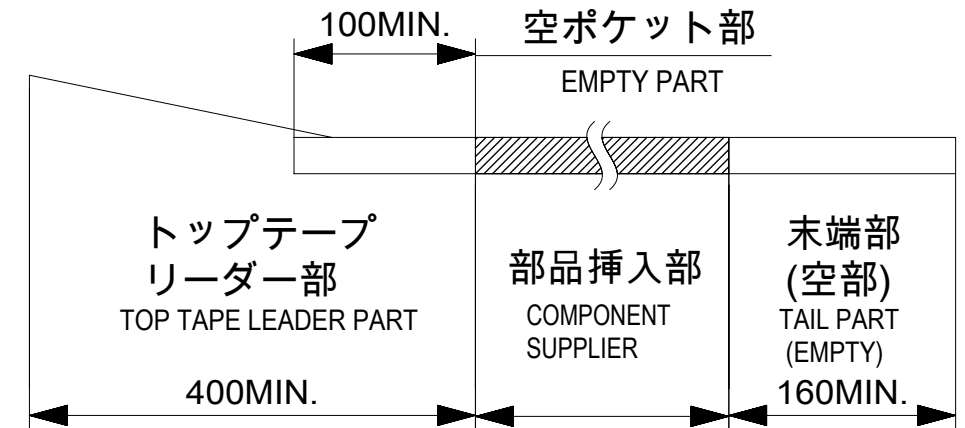

- カバートープの剥離強度については、IEC60286-3に準拠。
COVER TAPE PEEL FORCE IS DEFINED BY IEC 60286-3.
- 製品詳細寸法については、図面 5052781000/1001を参照下さい。
FOR DIMINTIONS OF PRODUCT, REFER TO 5052781000/1001.
- 材料 MATERIAL
キャリアテープ：ポリスチレン
CARRIER TAPE : POLYSTYRENE
トップテープ：ポリエチレンテレフタレート、ポリエチレン
TOP TAPE : POLYETHYLENE TEREHTHALATE, POLYETHYLENE
リール：ポリスチレン<リサイクル材を含む>
REEL : POLYSTYRENE <RECYCLE MATERIAL CONTAINED >
- ELV及びRoHS適合品 ELV AND RoHS COMPLIANT.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
EC NO: 106679 DRWN: YMIZUNO02 CHK'D: KTAKAHASHI APPR: TKUSUHARA01	2016/07/14 2016/07/28 2016/07/29	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION UNITS		SCALE		molex®							
				MM		2:1									
		ANGULAR TOL ± 1.0 °		DRWN BY		DATE		0.5 FFC CONN ZIF E/O EMBOSSED TAPE PKG							
				FSATO		2015/02/09									
		4 PLACES ± 0.03		CHK'D BY		DATE		PRODUCT CUSTOMER DRAWING							
				KTAKAHASHI		2015/02/12									
		3 PLACES ± 0.03		APPR BY		DATE		505278							
				YNOGAWA		2015/02/12									
		2 PLACES ± 0.05		DRAWING SIZE		THIRD ANGLE PROJECTION		SERIES		MATERIAL NUMBER			CUSTOMER		
				A3				505278		SEE CHART			GENERAL		
1 PLACE ± 0.1		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				DOCUMENT NUMBER		DOC TYPE		DOC PART		SHEET NUMBER			
						5052780000		PSD		000		1 OF 2			
0 PLACES ± 0.2															
D	REV														

引き出し方向

PULL OUT
DIRECTION

"E"

DETAIL "E"

