


REV.	ECR/ECN No.	DESCRIPTION	DRAWN/DATE	CHECKED/DATE	APPROVED/DATE
A	ECN2021046	NEW RELEASE	JiangSM 2021-03-02	Staven 2021-03-02	Sam 2021-03-02
B	ECN2024100801	增加按压行程及按压寿命	zhangzhiwei 24-09-10	tiger.tao 24-09-10	Rain Han 24-09-10

NOTES:

- 1) MATERIALS: C5210-EH T=0.12mm.
- 2) FINISH: CONTACT AND SOLDERING AREA PLATING: GOLD FLASH; UNDER PLATING: 40u"~120u"Ni.
- 3) ALLOWING BURRS 0.03mm Max.
- 4) THE SURFACE IS NOT ALLOWED TO HAVE CRUSHING; SCRATCY8HG; DEFORM TO COMPRESSIVE STRESS.
- 5) "O" THE SYMBOL INDICATES THE DIMENSION OF KEY FUNCTION INSPECTION.
- 6) CURRENT: 5A MAX.
- 7) COMPRESSION LIFE: 25CYCLES
- 8) RECOMMENDER WORKING HEIGHT=6.25mm MIN FORCE=1.5N MIN;
- 9) ENVIRONMENTAL: OPERATING TEMPERATURE: -40° C TO +105° C;

PCB LAYOUT RECOMMEND  
(TOP VIEW) TOLERANCE: ±0.05

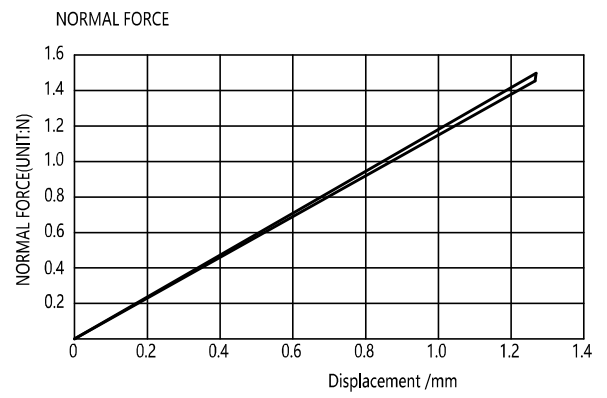

UNLESS OTHERWISE SPECIFIED TOLERANCES				ANGLE OF PROJECTION		Amphenol AORORA					
X.	±0.30	X.°	± 5'			Amphenol Aorora Technology (Huizhou) Co.,Ltd					
X.X	±0.25	X.X°	± 4'			TITLE: H7.5 SPRING					
X.XX	±0.20	X.XX°	± 3'	DOC TYP	Customer Drw	REV. B					
X.XXX	±0.15	X.XXX°	± 2'	DRAWN	JiangSM	DATE	2021-03-02	SIZE	A4	PART NUMBER:	Z02J-4F7L1-11000
LINEAR DIMS				DESIGN	JiangSM	DATE	2021-03-02				
DWG NO.:	A-S0653			CHECKED	Staven	DATE	2021-03-02				
MATERIAL	SEE NOTES			APPROVED	Sam	DATE	2021-03-02	SCALE	1:1	UNIT : mm	SHEET 1 OF 1
FINISHED	SEE NOTES										

