
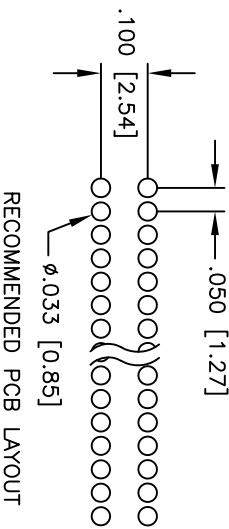




Rev	AWO #	Description	Date	Appr
-		RELEASED	9/20/11	

APPROVED: _____

DATE: _____ TITLE: _____

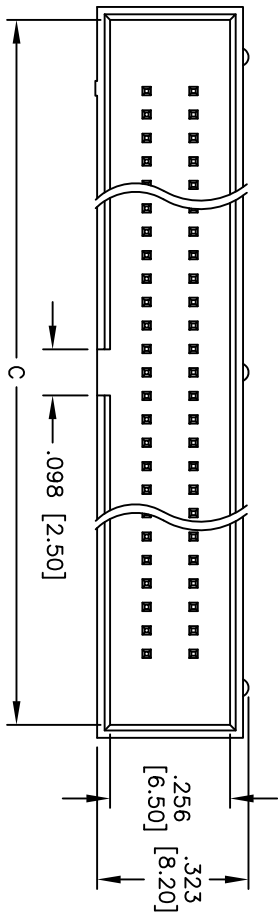

RECOMMENDED PCB LAYOUT

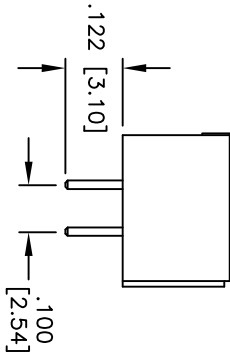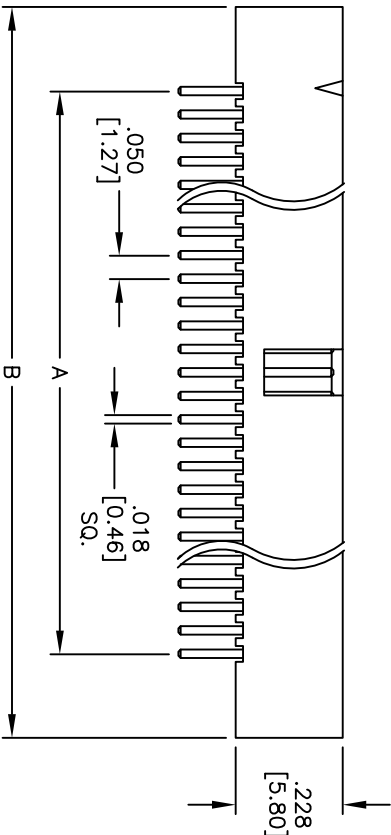

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Gold flash over Nickel underplate overall

Electrical:

Operating voltage: 250 VAC max.

Current rating: 1 Amp max.

Contact resistance: 20 mohms max. initial

Insulation resistance: 5,000 Mohms min.

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant

Positions: 8, 10, 20, 26, 30, 34, 40, 44, 50, 60, 68, 80, 100
A = .050 [1.27] x No. of Spaces
B = .050 [1.27] x No. of Spaces + .366 [9.29]
C = .050 [1.27] x No. of Spaces + .311 [7.89]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED	
INCHES	
.X ± .10	ØXX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE

TITLE	
.050" x .100" BOX HEADER, STRAIGHT	
GOLD PLATED, PCB TYPE, HI-TEMP	

DRAWN	AY	9/20/11	SIZE	PART NO.	REV.
CHECKED			X	HBHR-A1-XX-VG-HT	-
APPROVED			REF: S00041T	SCALE: NTS	SHEET 1 OF 1

ADAM TECH

909 Railway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710