

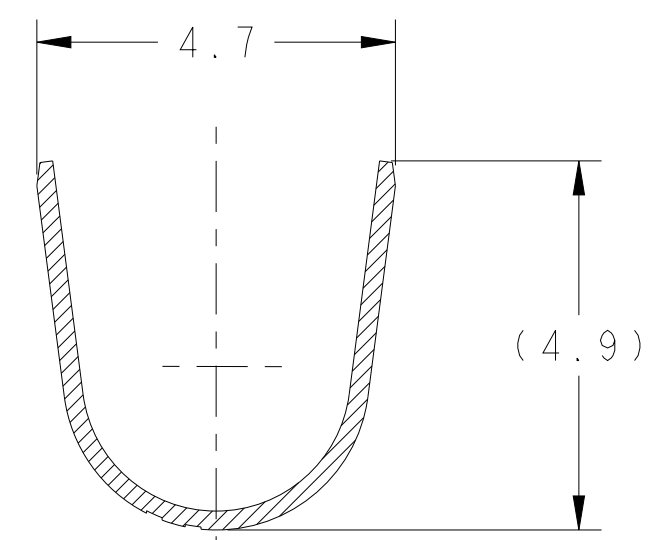
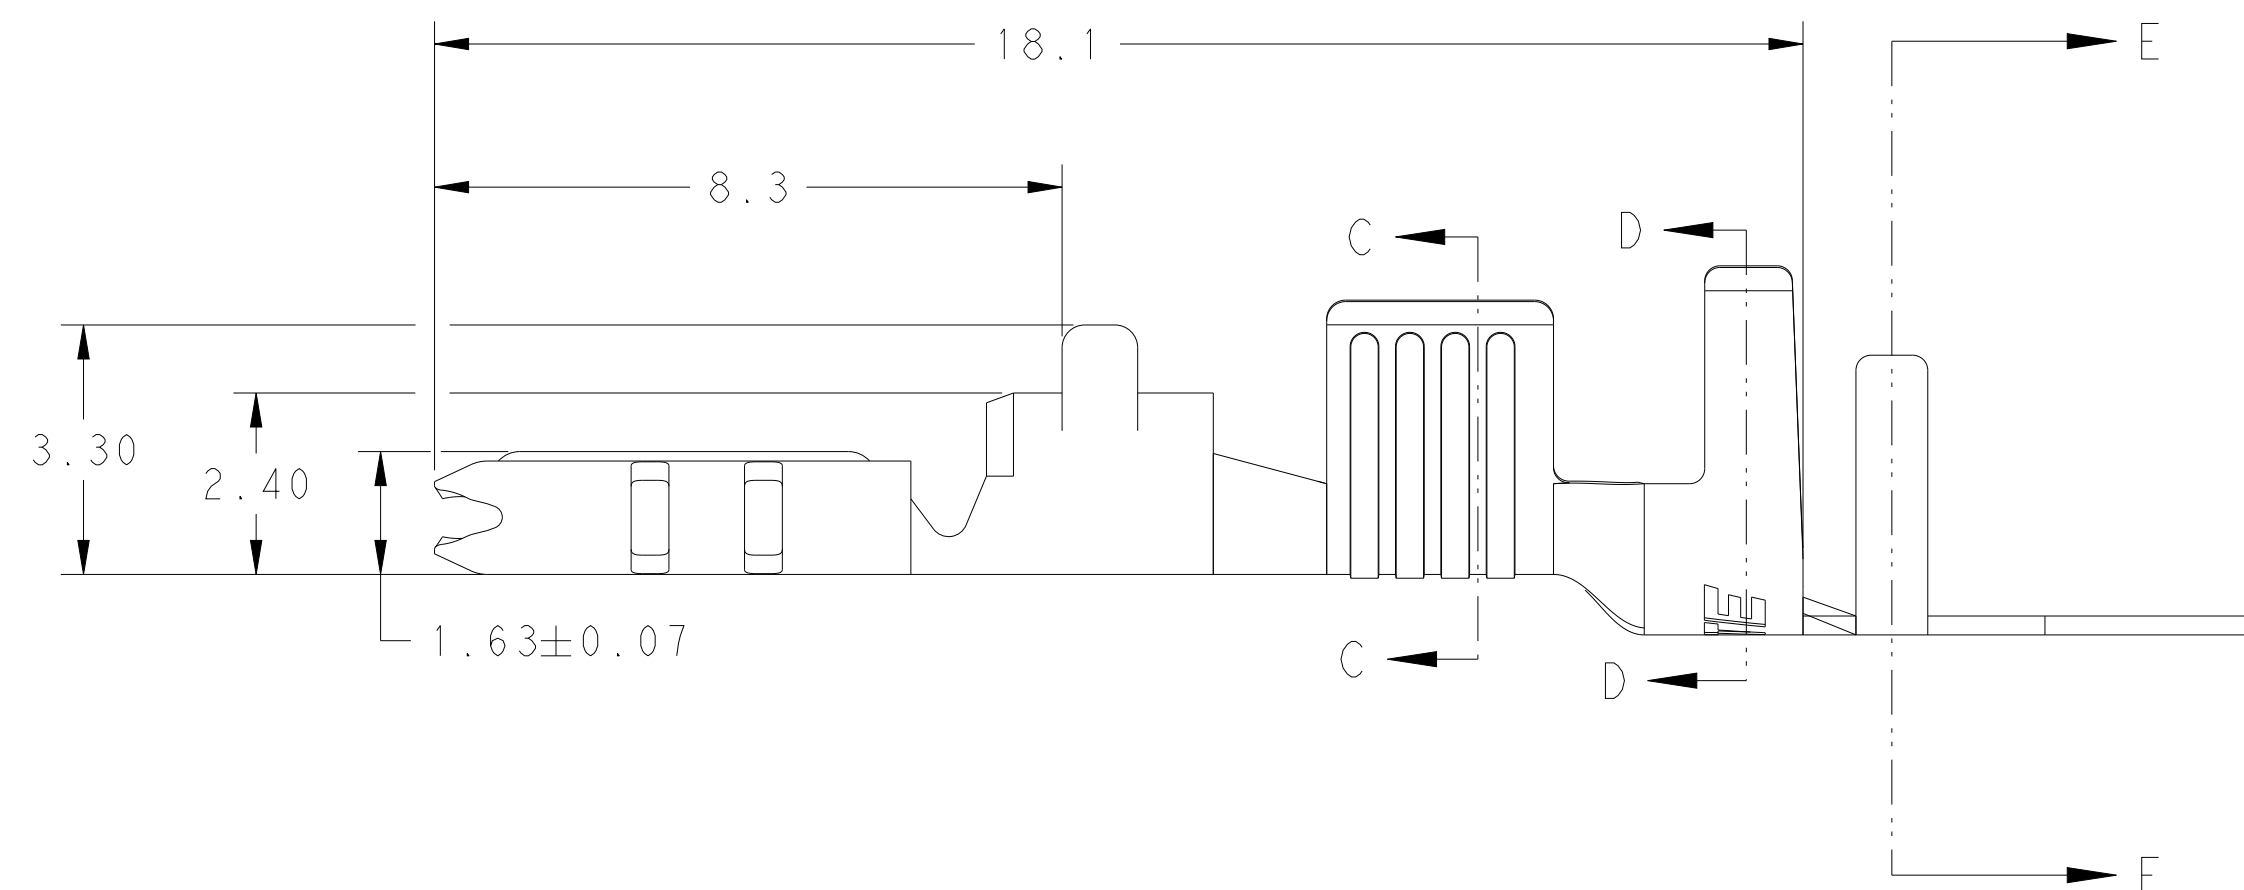
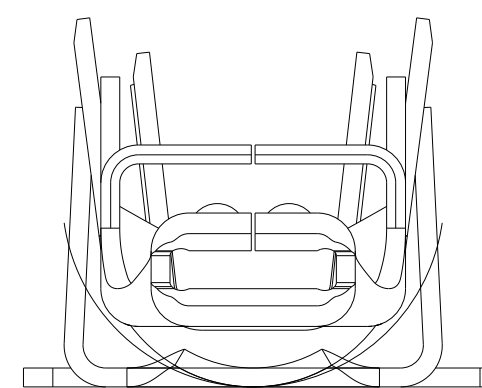
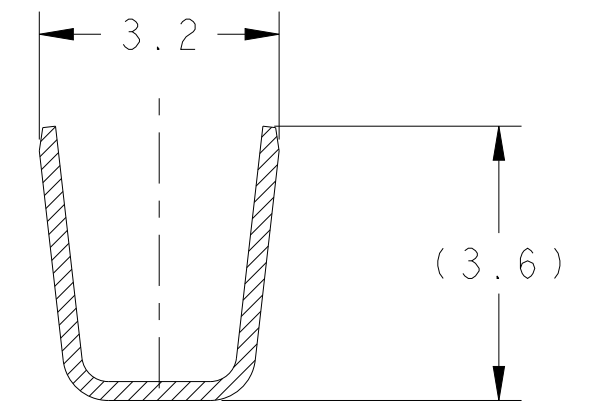
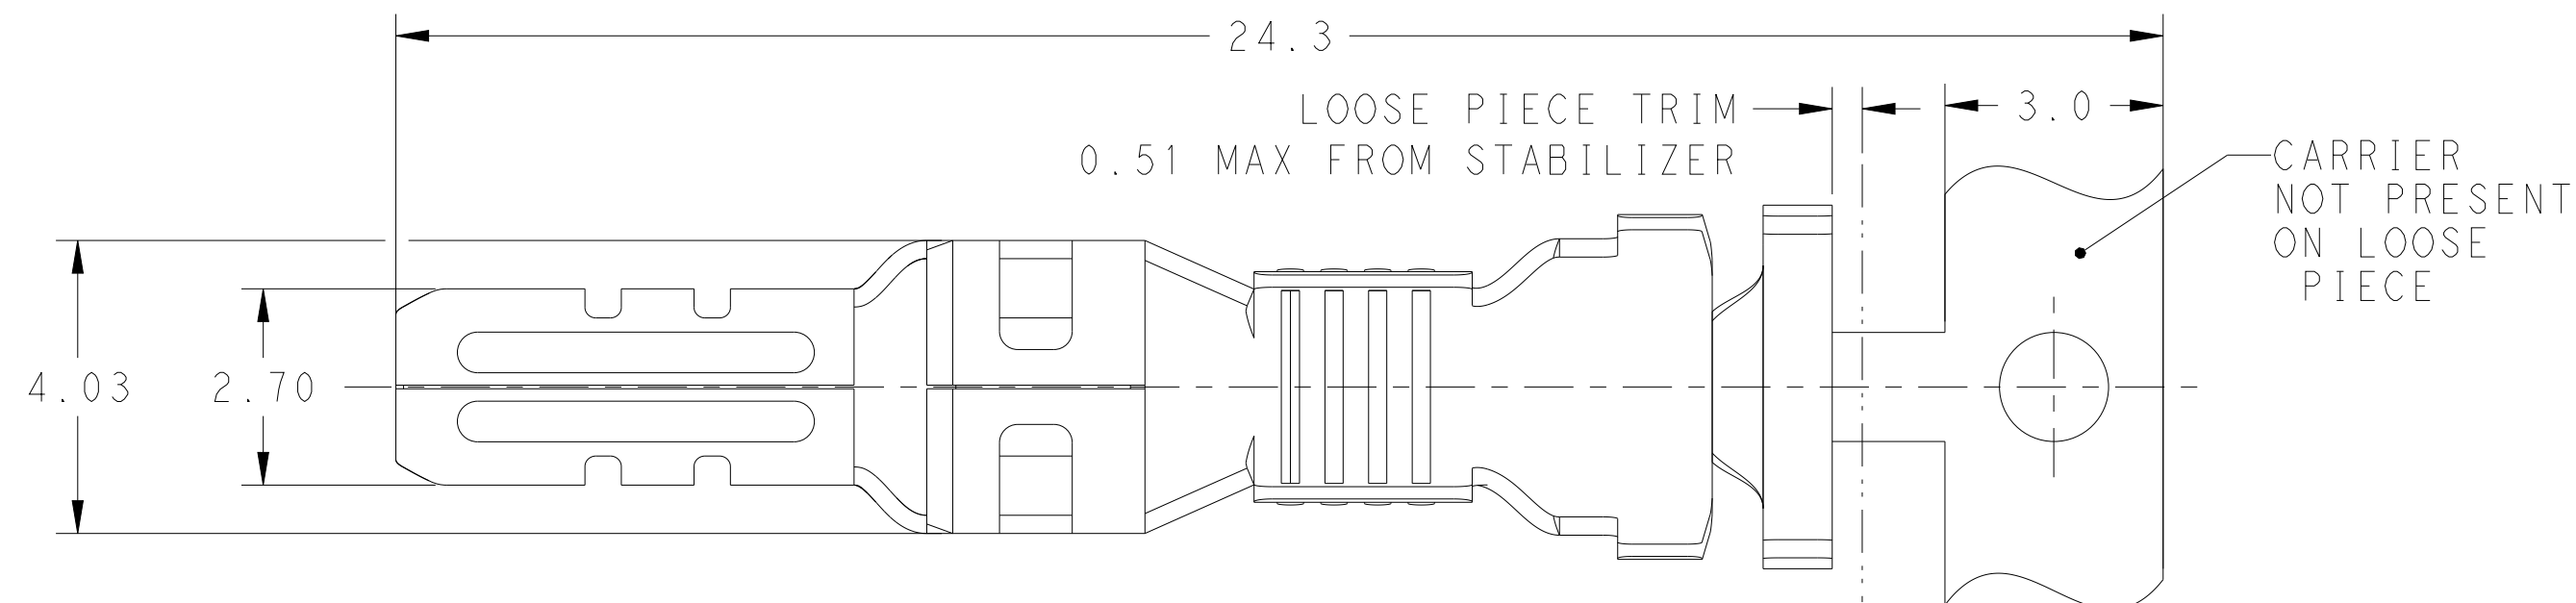


LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			E	REVISED PER ECR-21-100678	08APR2021	SS	VS
			F	REVISED PER ECR-25-261624	11FEB2026	AK	PJ

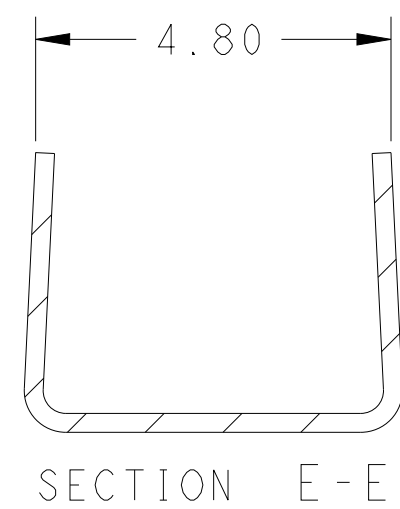

1. RECOMMENDED WIRE RANGE: 14 AWG COPPER STRANDED (3500 - 4300 CMA)
2. APPLICABLE INSULATION DIAMETER: 3.40~3.70mm
3. APPLICABLE MATED CAP HOUSING P/N:
-1971772-/*-1971775-*/*-1971875-*/
-2232263-/*-2232264-*/*-2232356-*

4 NOTE DELETED.

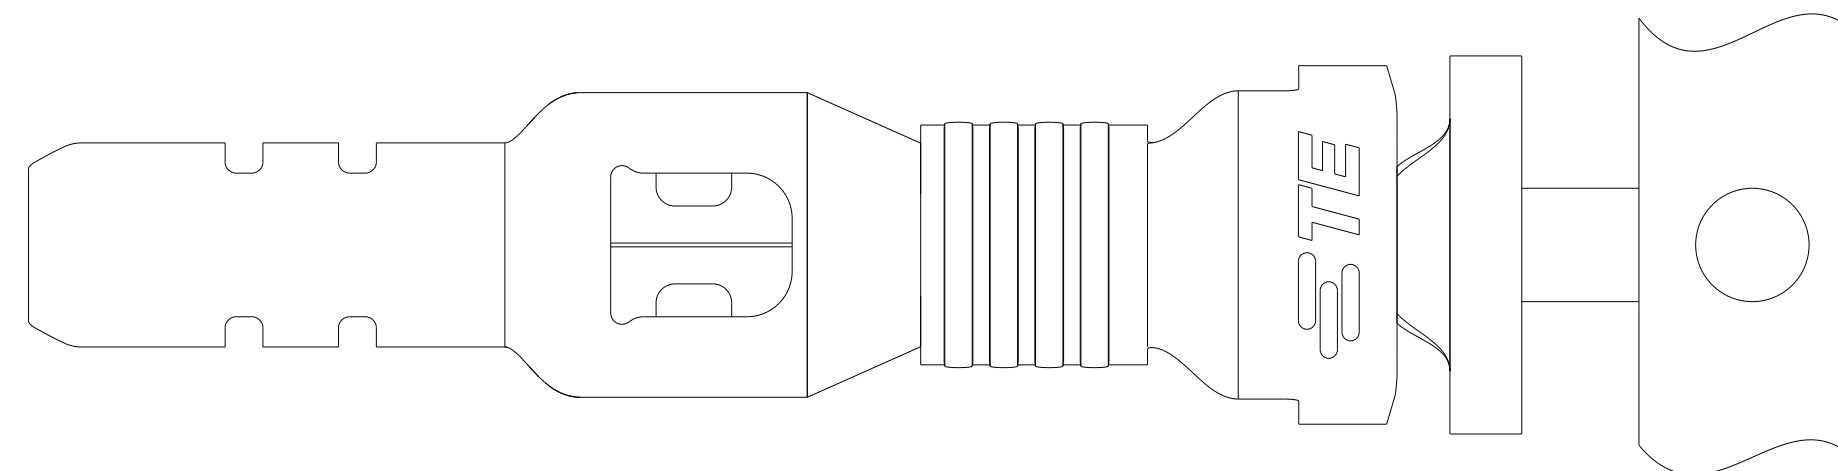

LOOSE PIECE	COPPER ALLOY	HIGH(150°C)	4-1971782-2
CONTINUOUS W CARRIER	COPPER ALLOY	HIGH(150°C)	1971782-2
CONTINUOUS W CARRIER	BRASS	STANDARD(105°C)	1971782-1
CONFIGURATION	MATERIAL	TEMP. RATING	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TOMMY WU 11JUL2011		 TE Connectivity	
		CHK HAPYE WU 11JUL2011			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± 0.5 2 PLC ± 0.30 3 PLC ± 4 PLC ± ANGLES ± - FINISH		NAME YUHONG MAO 11JUL2011 PRODUCT SPEC 108-106118 APPLICATION SPEC 114-106118	
		WEIGHT -		SIZE A2	
MATERIAL SEE TABLE		PRE-TIN		CAGE CODE 00779	
		Customer Drawing		DRAWING NO C-1971782	
				RESTRICTED TO -	
				SCALE 5:1	
				SHEET 1 OF 1	
				REV F	