

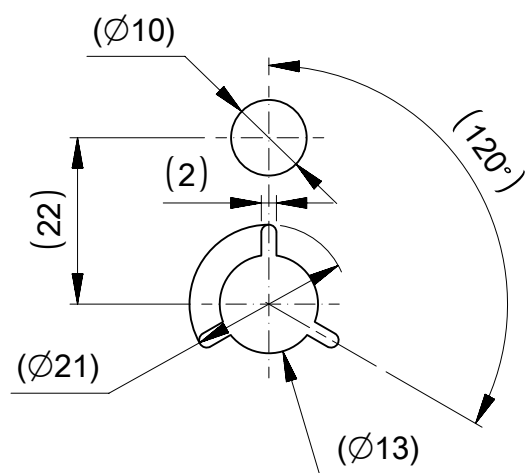


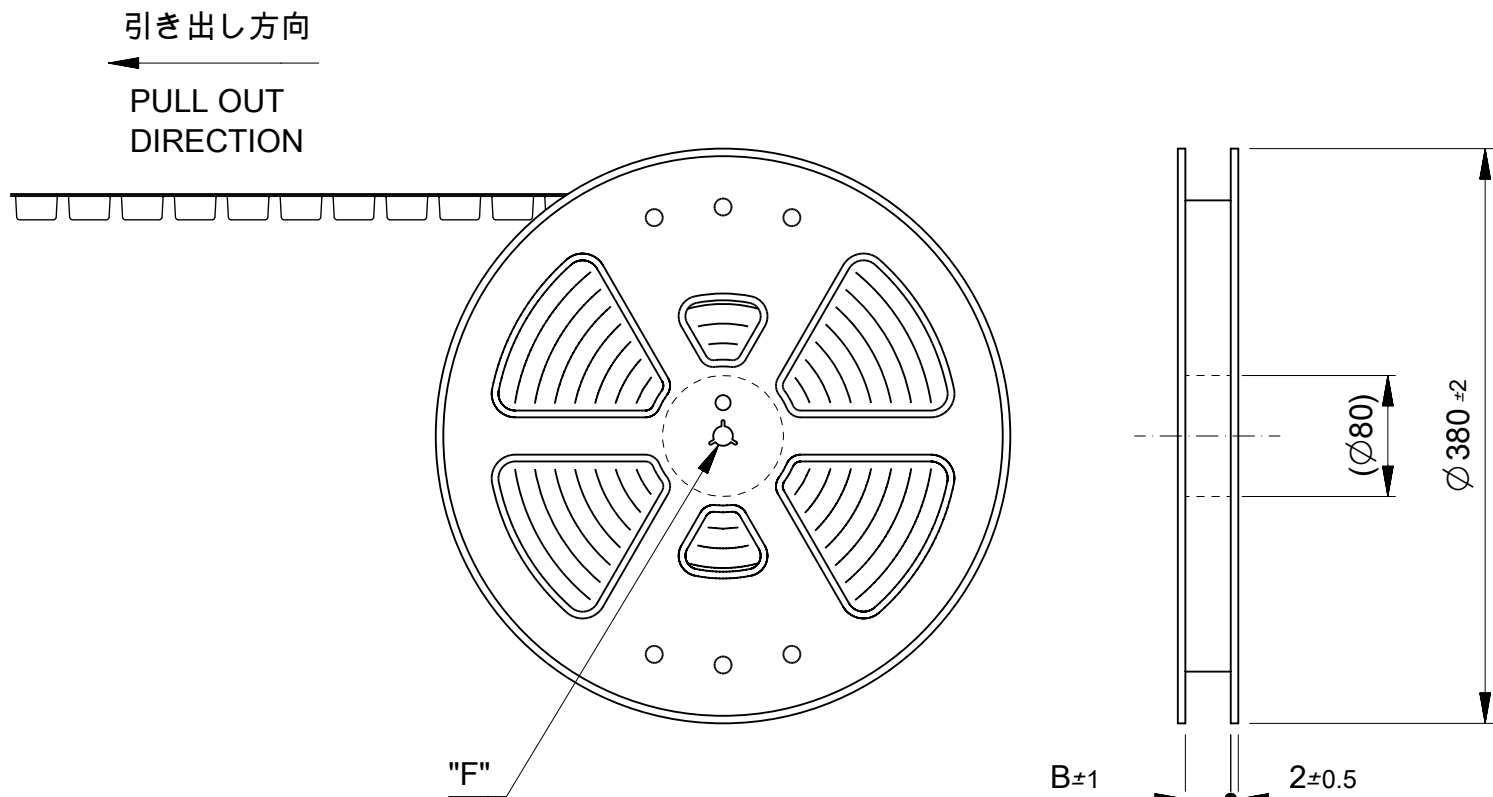


DETAIL "F"



NOTE

- 製品詳細寸法については図面 SD-55560-006 を参照下さい。
DETAIL DIMENSIONS, SEE SD-55560-006
- 梱包数量 : 3000個 / リール
NUMBER OF CONNECTORS : 3000PCS/REEL
- リードテープ長さ LEAD TAPE LENGTH

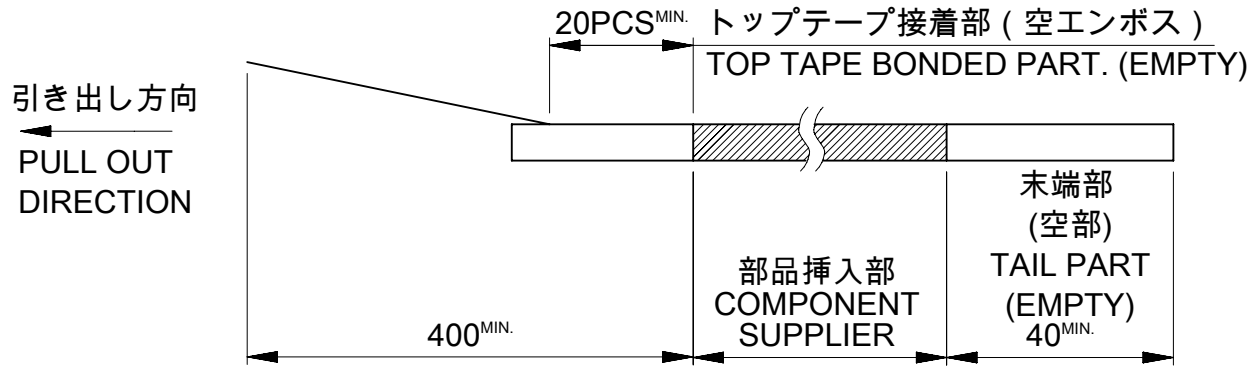

- カバートープの剥離強度については、IEC60286-3に準拠
COVER TAPE PEEL FORCE IS DEFINED BY IEC60286-3.
- FOR 20ckt ~ 40ckt
材料 キャリアテープ : ポリスチレン (PS)
トップテープ : PET
リール : ポリスチレン (PS) <リサイクル材を含む>
MATERIAL CARRIER TAPE : POLYSTYRENE(PS)
TOP TAPE : PET
REEL : POLYSTYRENE(PS)
< RECYCLE MATERIAL CONTAINED >
- FOR 50ckt,60ckt,80ckt
材料 キャリアテープ : ポリプロピレン (PP)
トップテープ : PET,PE,PEF
リール : ポリスチレン (PS) <リサイクル材を含む>
MATERIAL CARRIER TAPE : POLYPROPYLENE
TOP TAPE : PET,PE,PEF
REEL : POLYSTYRENE(PS)
< RECYCLE MATERIAL CONTAINED >

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
DIMENSION UNITS		SCALE		CURRENT REV DESC:				molex 0.5 MM PITCH B-TO-B CONN. HEIGHT = 1.5 PLUG EMBOSS TAPE PACKAGE					
mm		NTS											
GENERAL TOLERANCES (UNLESS SPECIFIED)													
ANGULAR TOL		± °		EC NO: 851965 DRWN: DGONDO 2026/01/27 CHK'D: SMARUYAMA 2026/03/31 APPR: YNAITO 2026/03/31				PRODUCT CUSTOMER DRAWING					
4 PLACES		±											
3 PLACES		±						DOCUMENT NUMBER SD-55560-007		DOC TYPE PSD	DOC PART 001	REVISION M	
2 PLACES		±											
1 PLACE		±		INITIAL REVISION: DRWN: S.AIHARA 2000/11/28 APPR: M.FUKUSHIMA 2001/01/30				SHEET NUMBER 1 OF 5					
0 PLACES		±											
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER	
						A3-SIZE		55560		SEE SHEET 2-5		GENERAL	

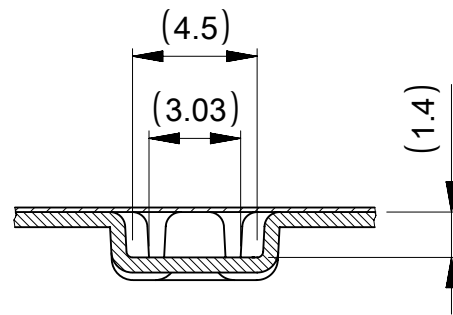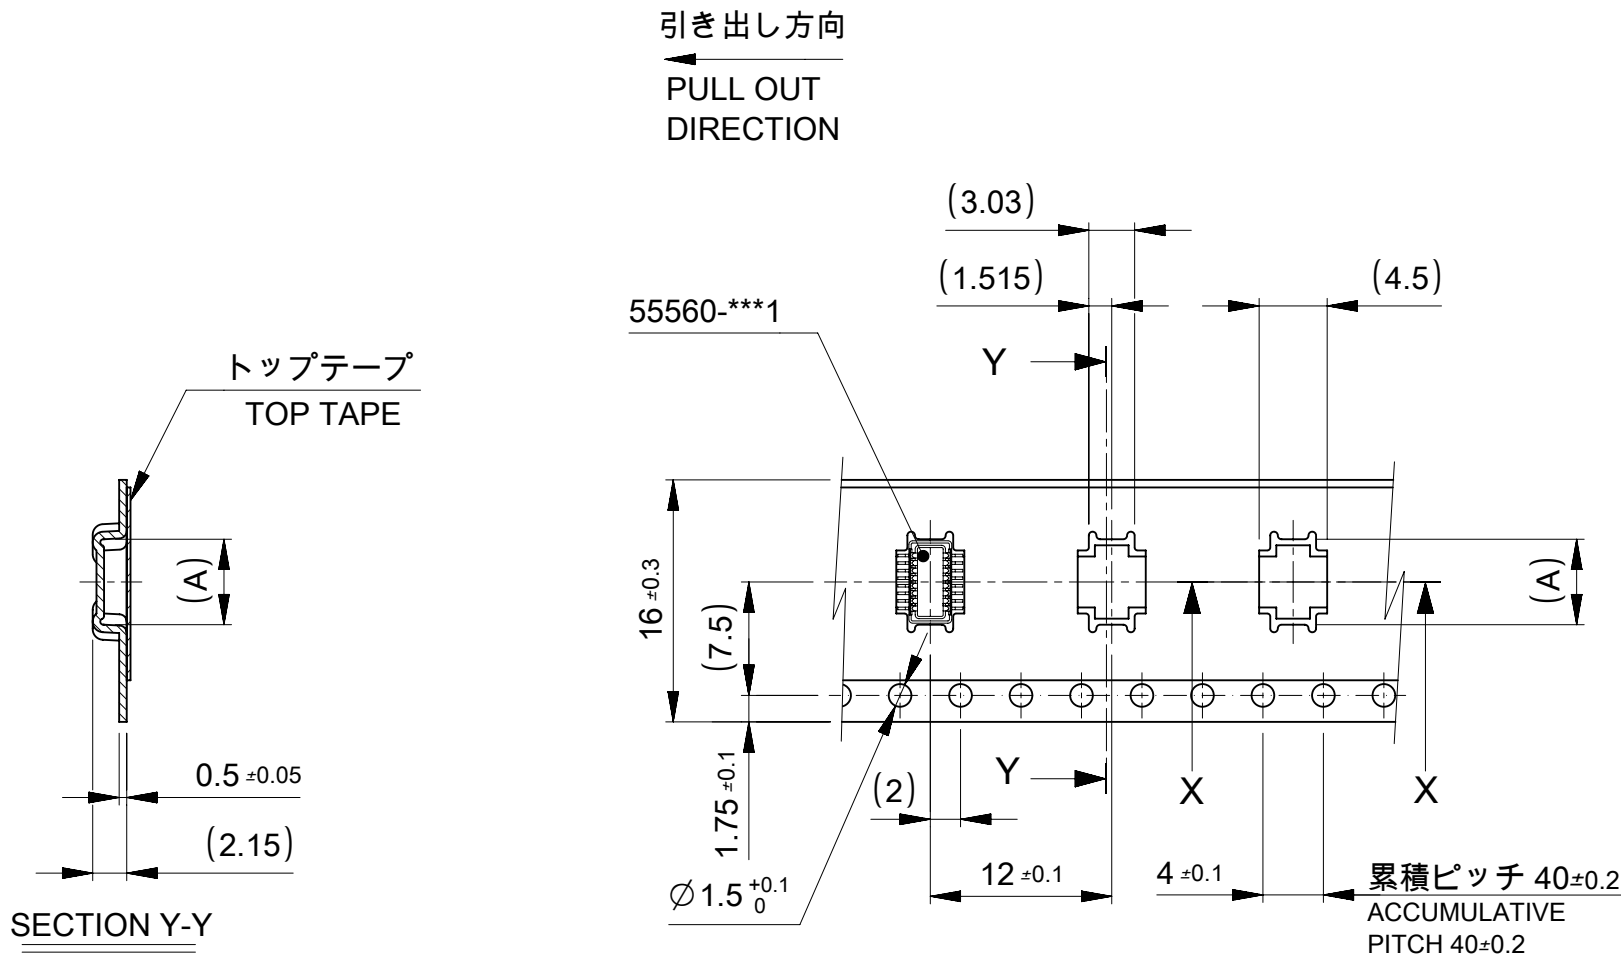


16 mm幅キャリアテープ
16mm WIDTH CARRIER TAPE

16	17.5	6.65	55560-0207	20
キャリアテープ幅 CARRIER TAPE WIDTH		B	(A)	極数 CIRCUIT

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
DIMENSION UNITS		SCALE		CURRENT REV DESC:				molex							
mm		NTS													
GENERAL TOLERANCES (UNLESS SPECIFIED)		GENERAL TOLERANCES (UNLESS SPECIFIED)		EC NO: 851965 DRWN: DGONDO CHK'D: SMARUYAMA APPR: YNAITO				0.5 MM PITCH B-TO-B CONN. HEIGHT = 1.5 PLUG EMBOSS TAPE PACKAGE							
		ANGULAR TOL ± °													
		4 PLACES ±													
		3 PLACES ±													
		2 PLACES ±													
10^{UNDER}		±0.2		PRODUCT CUSTOMER DRAWING				DOCUMENT NUMBER SD-55560-007		DOC TYPE PSD		DOC PART 001		REVISION M	
10^{OVER}30^{UNDER}		±0.25													
30^{OVER}		±0.3													
ANGULAR±3°		0 PLACES ±		INITIAL REVISION: DRWN: S.AIHARA APPR: M.FUKUSHIMA				2000/11/28 2001/01/30							
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
						A3-SIZE		55560		SEE SHEET 2-5		GENERAL		2 OF 5	

DOCUMENT STATUS	P1	RELEASE DATE	2026/03/31	06:02:39
-----------------	----	--------------	------------	----------

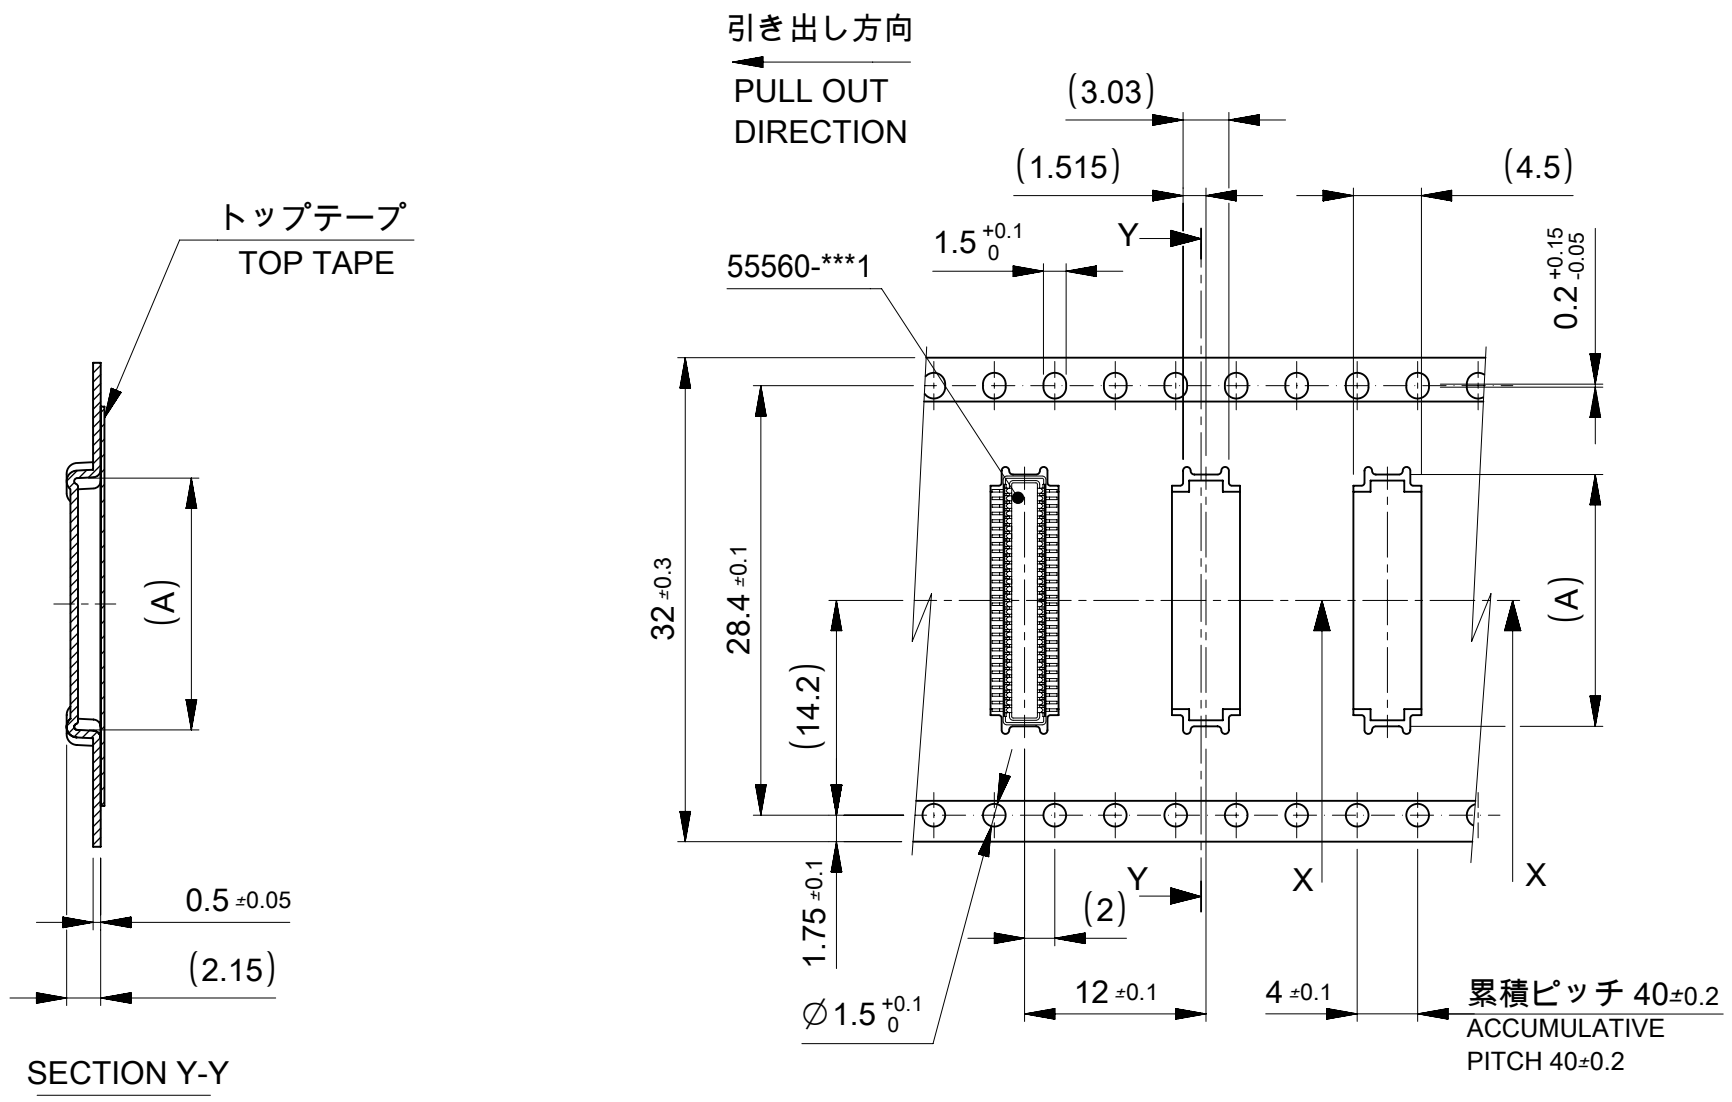

32 mm幅キャリアテープ
32mm WIDTH CARRIER TAPE

32		33.5	16.65	55560-0607	60
キャリアテープ幅 CARRIER TAPE WIDTH		B	(A)	MATERIAL NO.	極数 CIRCUIT
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
NTS	SCALE	CURRENT REV DESC:		molex	
TOLERANCES (AS SPECIFIED)	NTS	EC NO: 851965 DRWN: DGONDO CHK'D: SMARUYAMA APPR: YNAITO		0.5 MM PITCH B-TO-B CONN. HEIGHT = 1.5 PLUG EMBOSS TAPE PACKAGE	
±	±	2026/01/27		PRODUCT CUSTOMER DRAWING	
±	±	2026/03/31		DOCUMENT NUMBER	
±	±	2026/03/31		SD-55560-007	
±	±	INITIAL REVISION:		DOC TYPE	
±	±	DRWN: S.AIHARA		PSD	
±	±	APPR: M.FUKUSHIMA		DOC PART	
±	±	2000/11/28		001	
±	±	2001/01/30		REVISION	
±	±	M		M	
±	±	THIRD ANGLE PROJECTION		SHEET NUMBER	
±	±	DRAWING		4 OF 5	
±	±	A3-SIZE		GENERAL	
±	±	55560		SEE SHEET 2-5	
±	±	SERIES		CUSTOMER	
±	±	MATERIAL NUMBER		GENERAL	
±	±	SEE SHEET 2-5		4 OF 5	
±	±	CUSTOMER		GENERAL	
±	±	SHEET NUMBER		4 OF 5	
±	±	4 OF 5		GENERAL	
±	±	GENERAL		4 OF 5	
±	±	4 OF 5		GENERAL	
±	±	GENERAL		4 OF 5	
±	±	4 OF 5		GENERAL	
±	±	GENERAL		4 OF 5	
±	±	4 OF 5		GENERAL	
±	±	GENERAL		4 OF 5	
±	±	4 OF 5		GENERAL	
±	±	GENERAL		4 OF 5	
±	±	4 OF 5		GENERAL	
±	±	GENERAL		4 OF 5	
±	±	4 OF 5		GENERAL	
±	±	GENERAL		4 OF 5	
±	±	4 OF 5		GENERAL	
±	±	GENERAL		4 OF 5	
±	±	4 OF 5		GENERAL	
±	±	GENERAL		4 OF 5	
±	±	4 OF 5		GENERAL	
±	±	GENERAL		4 OF 5	
±	±	4 OF 5		GENERAL	
±	±	GENERAL		4 OF 5	
±	±	4 OF 5		GENERAL	
±	±	GENERAL		4 OF 5	
±	±	4 OF 5		GENERAL	
±	±	GENERAL		4 OF 5	
±	±	4 OF 5		GENERAL	
±	±	GENERAL		4 OF 5	
±	±	4 OF 5		GENERAL	
±	±	GENERAL		4 OF 5	
±	±	4 OF 5		GENERAL	
±	±	GENERAL		4 OF 5	
±	±	4 OF 5		GENERAL	
±	±	GENERAL		4 OF 5	
±	±	4 OF 5		GENERAL	
±	±	GENERAL		4 OF 5	
±	±	4 OF 5		GENERAL	
±	±	GENERAL		4 OF 5	
±	±	4 OF 5		GENERAL	
±	±	GENERAL		4 OF 5	
±	±	4 OF 5		GENERAL	
±	±	GENERAL		4 OF 5	
±	±	4 OF 5		GENERAL	
±	±	GENERAL		4 OF 5	
±	±	4 OF 5		GENERAL	
±	±	GENERAL		4 OF 5	
±	±	4 OF 5		GENERAL	
±	±	GENERAL		4 OF 5	
±	±	4 OF 5		GENERAL	
±	±	GENERAL		4 OF 5	
±	±	4 OF 5		GENERAL	
±	±	GENERAL		4 OF 5	
±	±	4 OF 5		GENERAL	
±	±	GENERAL		4 OF 5	
±	±	4 OF 5		GENERAL	
±	±	GENERAL		4 OF 5	
±	±	4 OF 5		GENERAL	
±	±	GENERAL		4 OF 5	
±	±	4 OF 5		GENERAL	
±	±	GENERAL		4 OF 5	
±	±	4 OF 5		GENERAL	
±	±	GENERAL		4 OF 5	
±	±	4 OF 5		GENERAL	
±	±	GENERAL		4 OF 5	
±	±	4 OF 5		GENERAL	
±	±	GENERAL		4 OF 5	
±	±	4 OF 5		GENERAL	
±	±	GENERAL		4 OF 5	
±	±	4 OF 5		GENERAL	
±	±	GENERAL		4 OF 5	
±	±	4 OF 5		GENERAL	
±	±	GENERAL		4 OF 5	
±	±	4 OF 5		GENERAL	
±	±	GENERAL		4 OF 5	
±	±	4 OF 5		GENERAL	
±	±	GENERAL		4 OF 5	
±	±	4 OF 5		GENERAL	
±	±	GENERAL		4 OF 5	
±	±	4 OF 5		GENERAL	
±	±	GENERAL		4 OF 5	
±	±	4 OF 5		GENERAL	
±	±	GENERAL		4 OF 5	
±	±	4 OF 5		GENERAL	
±	±	GENERAL		4 OF 5	
±	±	4 OF 5		GENERAL	
±	±	GENERAL		4 OF 5	
±	±	4 OF 5		GENERAL	
±	±	GENERAL			

