


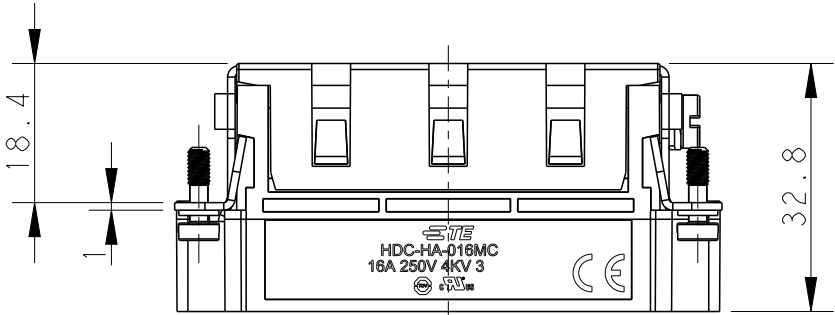
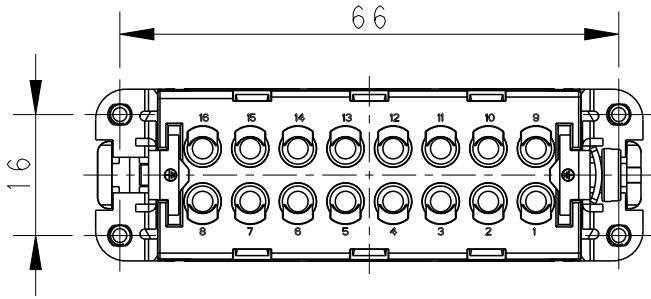


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	12NOV2014	DW	CW
	B	ECR-20-016101	09JUN2021	BS	CW
	C	ECR-25-246907	18JUN2025	ABS	RB

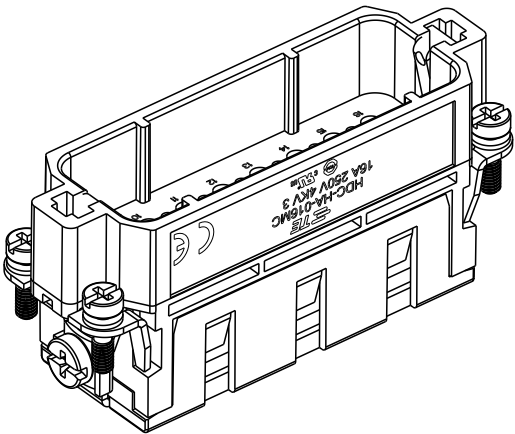


M4 SCREW
RECOMMENDED
TIGHTENING TORQUE 1.2Nm

4X M3 SCREW, RECOMMENDED
TIGHTENING TORQUE 0.5Nm

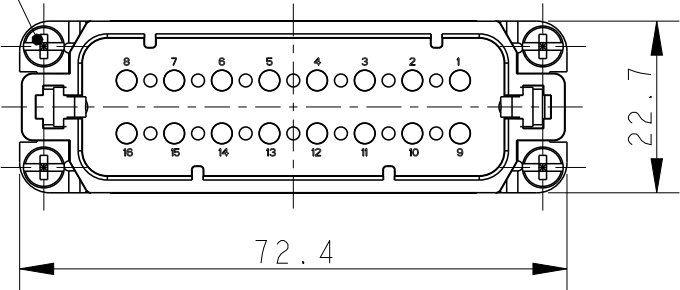


PANEL CUT FOR INSERTS FOR USE
WITHOUT HOODS/ HOUSINGS

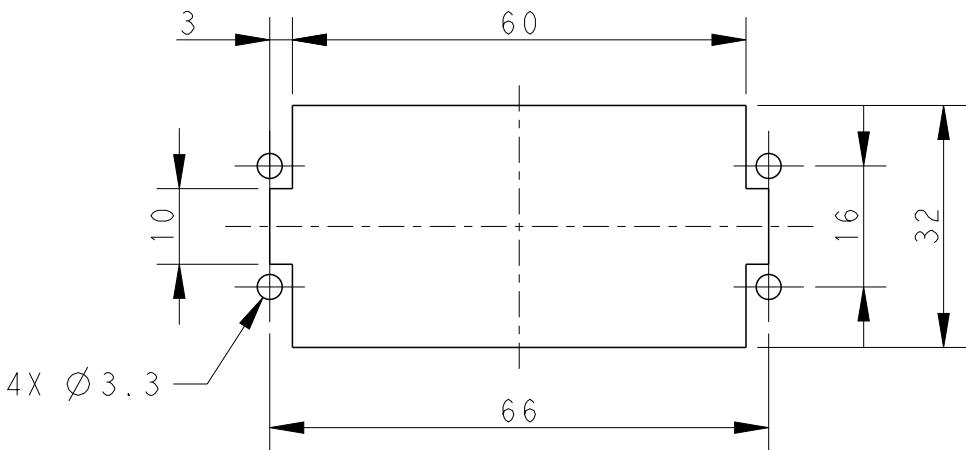

- NOTES:
- TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 250 V
RATED CURRENT: 16 A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 4 KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: 0.14-4 mm² (26-12 AWG)
CONTACT TYPE: CRIMP CONTACT
 - CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING: T20300X10XX000)

- 注释:
- 技术参数:
绝缘材料: PC
额定电压: 250V
额定电流: 16A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 4 KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
接线范围: 0.14-4 mm² (26-12 AWG)
接线类型: 冷压接
 - 端子需要单独订购.
(订货号参考图面: T20300X10XX000)

HA-016-MC	T2010164101-000
DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 12NOV2014 David Wang	 TE Connectivity		
		CHK 12NOV2014 Chris Wang			
		APVD 12NOV2014 Xiang Xu			
		PRODUCT SPEC 108-137045			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:	NAME HA-016-MC		
		0 PLC ±-	SIZE CAGE CODE DRAWING NO RESTRICTED TO		
		1 PLC ±-			
		2 PLC ±-	A300779 © T2010164101000		
		3 PLC ±-			
		4 PLC ±-	SCALE 1:1 SHEET 1 OF 1 REV C		
		ANGLES ±-			
MATERIAL		FINISH	CUSTOMER DRAWING		
-		-			
-		-			