


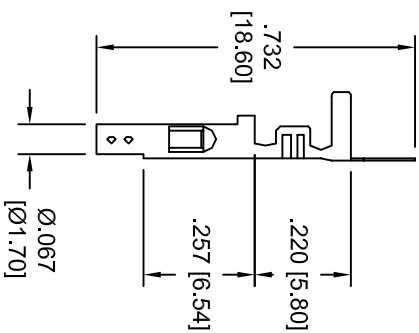


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/7/07	

APPROVED: _____

DATE: _____ TITLE: _____

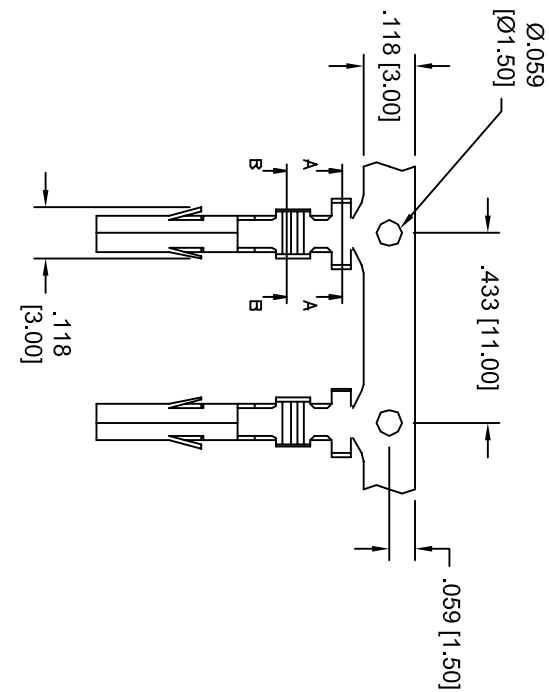

SEC A-A

SEC B-B

PART #	WIRE AWG	DIMENSIONS			
		C	D	E	F
DMH-A-C-F-B	22 ~ 26	.134 [3.4]	.130 [3.3]	.098 [2.5]	.090 [2.3]
DMH-B-C-F-B	18 ~ 22	.157 [4.0]	.177 [4.5]	.098 [2.5]	.090 [2.3]
DMH-C-C-F-B	16	.157 [4.0]	.177 [4.5]	.110 [2.8]	.106 [2.7]

SPECIFICATIONS:

Material:
Contacts: Brass
Plating:
Tin over Copper underplate overall
Electrical:
Operating voltage: 250 VAC max
Current rating: 5 Amps max
Contact resistance: 20 mohms max
Environmental:
Lead free, RoHS compliant.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: CRIMP CONTACT, DMH SERIES
FEMALE, TIN PLATED, BAGGED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010		HOLE ± .10 ± .015 ± .010		DATE	
APPROVALS		DATE		DATE	
DRAWN	SS	6/7/07			
CHECKED					
APPROVED					
SIZE		PART NO.		REV.	
X		DMH-X-C-F-B		-	
REF:		SCALE: NTS		SHEET 1 OF 1	