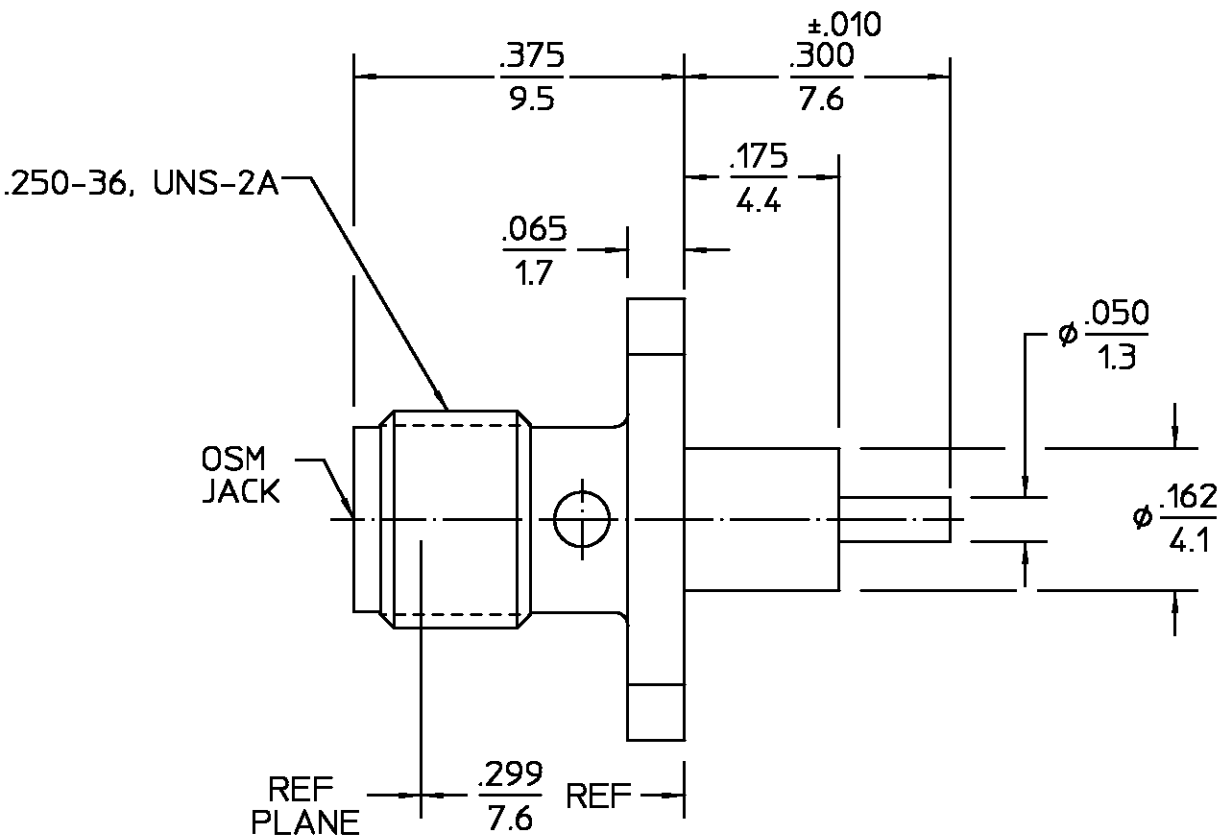
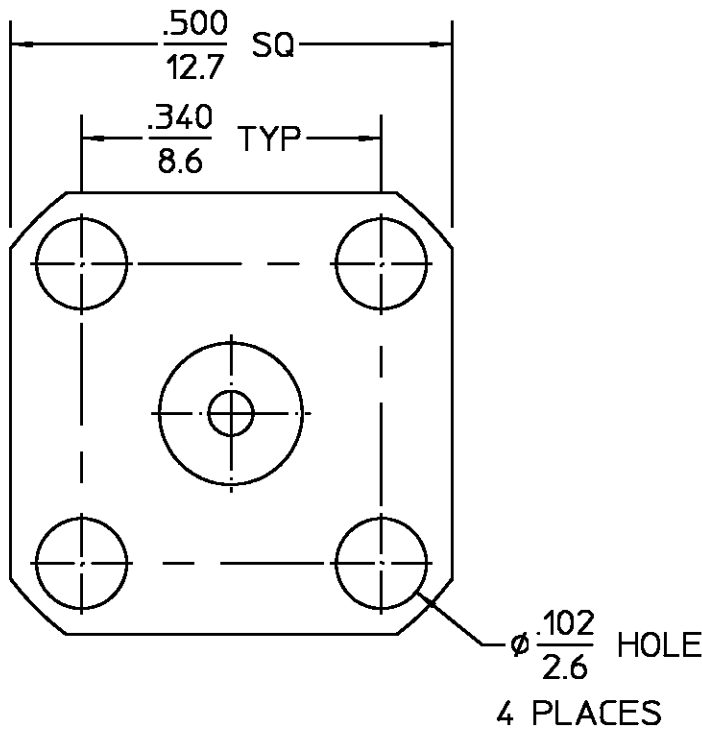


		REVISIONS																																																																																					
		REV	DESCRIPTION	DATE	APPROVED																																																																																		
		01 0	RELEASED	6/11/98	TWag																																																																																		
																																																																																							
<table><tr><td>ELECTRICAL</td><td>MECHANICAL</td><td>ENVIRONMENTAL</td></tr><tr><td>Nominal Impedance (Ohms) 50</td><td>Interface Dimensions MIL-STD-348A, Fig. 310-2</td><td>Temperature Rating -65°C To +125°C</td></tr><tr><td>Frequency Range (GHz) DC to 18</td><td>Recommended Mating Torque 7-10 In-Lbs</td><td>Vibration MIL-STD-202, Method 204, Condition D</td></tr><tr><td>Volt Rating (VRMS MAX) @ Sea Level 335</td><td>Mating Characteristics:</td><td>Shock MIL-STD-202, Method 213, Condition I</td></tr><tr><td>VSWR 1.02 + .005f GHz</td><td>Insertion (MAX Lbs) 3.0</td><td>Thermal Shock MIL-STD-202, Method 107, Condition B,</td></tr><tr><td>Insertion Loss (dB MAX) .06 √f GHz</td><td>Withdrawal (MIN Oz) 1.0</td><td>Moisture Resistance MIL-STD-202, Method 106, Except Vibration</td></tr><tr><td>RF Leakage (dB MIN) -90 @ 2-3 GHz</td><td>Force to Engage and Disengage (In/Lbs MAX) 2</td><td>Shall Be Omitted</td></tr><tr><td>Corona, 70,000 Ft (VRMS MIN) 250</td><td>Center Contact Captivation</td><td>Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray</td></tr><tr><td>Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level 1000</td><td>Axial (Lbs) 6.0</td><td></td></tr><tr><td>Contact Resistance (Milliohms MAX) Center Contact 2.0</td><td>Radial (In/Oz) 4.0</td><td></td></tr><tr><td>Outer Contact 2.0</td><td>Weight (Grams) TBD</td><td></td></tr><tr><td>Cable to Housing N/A</td><td></td><td></td></tr><tr><td>RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) 670</td><td></td><td></td></tr><tr><td>IR.(Megohms MIN) 5,000</td><td></td><td></td></tr></table>		ELECTRICAL	MECHANICAL	ENVIRONMENTAL	Nominal Impedance (Ohms) 50	Interface Dimensions MIL-STD-348A, Fig. 310-2	Temperature Rating -65°C To +125°C	Frequency Range (GHz) DC to 18	Recommended Mating Torque 7-10 In-Lbs	Vibration MIL-STD-202, Method 204, Condition D	Volt Rating (VRMS MAX) @ Sea Level 335	Mating Characteristics:	Shock MIL-STD-202, Method 213, Condition I	VSWR 1.02 + .005f GHz	Insertion (MAX Lbs) 3.0	Thermal Shock MIL-STD-202, Method 107, Condition B,	Insertion Loss (dB MAX) .06 √f GHz	Withdrawal (MIN Oz) 1.0	Moisture Resistance MIL-STD-202, Method 106, Except Vibration	RF Leakage (dB MIN) -90 @ 2-3 GHz	Force to Engage and Disengage (In/Lbs MAX) 2	Shall Be Omitted	Corona, 70,000 Ft (VRMS MIN) 250	Center Contact Captivation	Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray	Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level 1000	Axial (Lbs) 6.0		Contact Resistance (Milliohms MAX) Center Contact 2.0	Radial (In/Oz) 4.0		Outer Contact 2.0	Weight (Grams) TBD		Cable to Housing N/A			RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) 670			IR.(Megohms MIN) 5,000			<table><tr><td>HOUSING</td><td>STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303</td><td>PASSIVATE PER QQ-P-35</td></tr><tr><td>DIELECTRIC</td><td>PTFE FLUOROCARBON PER ASTM-D-1457</td><td>N/A</td></tr><tr><td>CENTER CONTACT</td><td>BERYLLIUM COPPER PER ASTM-B-196 OR ASTM-B-197, ALLOY C17300, CONDITION H</td><td>GOLD PLATE PER MIL-G-45204</td></tr><tr><td>COMPONENT</td><td>MATERIAL</td><td>FINISH</td></tr></table>		HOUSING	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	PASSIVATE PER QQ-P-35	DIELECTRIC	PTFE FLUOROCARBON PER ASTM-D-1457	N/A	CENTER CONTACT	BERYLLIUM COPPER PER ASTM-B-196 OR ASTM-B-197, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204	COMPONENT	MATERIAL	FINISH	<table><tr><td rowspan="2">UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ON</td><td>DRAWN BY</td><td>DATE</td><td rowspan="2">AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599</td></tr><tr><td>TIM WAGNER</td><td>6/11/98</td></tr><tr><td>FRAC. DEC. ANGLES</td><td>CHECKED BY</td><td></td><td></td></tr><tr><td>± 1/64 ±.005 ± 1°</td><td>APPD BY</td><td>TWag 6/11/1998</td><td></td></tr><tr><td rowspan="3">These drawings and specifications are the property of M/A-COM Incorporated and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.</td><td>USE ASS'Y PROCEDURE</td><td colspan="2">TITLE OSM FLANGE MOUNT JACK RECEPTACLE STRAIGHT TERMINAL</td></tr><tr><td>NO. AP. N/A</td><td>SIZE B</td><td>CODE IDENT NO. 26805</td></tr><tr><td></td><td>SCALE 5 : 1</td><td>2052-3607-02</td></tr><tr><td></td><td></td><td>REV 01 0</td><td>SHEET 1 OF 1</td></tr></table>		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ON	DRAWN BY	DATE	AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599	TIM WAGNER	6/11/98	FRAC. DEC. ANGLES	CHECKED BY			± 1/64 ±.005 ± 1°	APPD BY	TWag 6/11/1998		These drawings and specifications are the property of M/A-COM Incorporated and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.	USE ASS'Y PROCEDURE	TITLE OSM FLANGE MOUNT JACK RECEPTACLE STRAIGHT TERMINAL		NO. AP. N/A	SIZE B	CODE IDENT NO. 26805		SCALE 5 : 1	2052-3607-02			REV 01 0	SHEET 1 OF 1
ELECTRICAL	MECHANICAL	ENVIRONMENTAL																																																																																					
Nominal Impedance (Ohms) 50	Interface Dimensions MIL-STD-348A, Fig. 310-2	Temperature Rating -65°C To +125°C																																																																																					
Frequency Range (GHz) DC to 18	Recommended Mating Torque 7-10 In-Lbs	Vibration MIL-STD-202, Method 204, Condition D																																																																																					
Volt Rating (VRMS MAX) @ Sea Level 335	Mating Characteristics:	Shock MIL-STD-202, Method 213, Condition I																																																																																					
VSWR 1.02 + .005f GHz	Insertion (MAX Lbs) 3.0	Thermal Shock MIL-STD-202, Method 107, Condition B,																																																																																					
Insertion Loss (dB MAX) .06 √f GHz	Withdrawal (MIN Oz) 1.0	Moisture Resistance MIL-STD-202, Method 106, Except Vibration																																																																																					
RF Leakage (dB MIN) -90 @ 2-3 GHz	Force to Engage and Disengage (In/Lbs MAX) 2	Shall Be Omitted																																																																																					
Corona, 70,000 Ft (VRMS MIN) 250	Center Contact Captivation	Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray																																																																																					
Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level 1000	Axial (Lbs) 6.0																																																																																						
Contact Resistance (Milliohms MAX) Center Contact 2.0	Radial (In/Oz) 4.0																																																																																						
Outer Contact 2.0	Weight (Grams) TBD																																																																																						
Cable to Housing N/A																																																																																							
RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) 670																																																																																							
IR.(Megohms MIN) 5,000																																																																																							
HOUSING	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	PASSIVATE PER QQ-P-35																																																																																					
DIELECTRIC	PTFE FLUOROCARBON PER ASTM-D-1457	N/A																																																																																					
CENTER CONTACT	BERYLLIUM COPPER PER ASTM-B-196 OR ASTM-B-197, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204																																																																																					
COMPONENT	MATERIAL	FINISH																																																																																					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ON	DRAWN BY	DATE	AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599																																																																																				
	TIM WAGNER	6/11/98																																																																																					
FRAC. DEC. ANGLES	CHECKED BY																																																																																						
± 1/64 ±.005 ± 1°	APPD BY	TWag 6/11/1998																																																																																					
These drawings and specifications are the property of M/A-COM Incorporated and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.	USE ASS'Y PROCEDURE	TITLE OSM FLANGE MOUNT JACK RECEPTACLE STRAIGHT TERMINAL																																																																																					
	NO. AP. N/A	SIZE B	CODE IDENT NO. 26805																																																																																				
		SCALE 5 : 1	2052-3607-02																																																																																				
		REV 01 0	SHEET 1 OF 1																																																																																				