




REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	APR 09/18	L.CHAN
B	PROPOSAL	APR 30/20	L.CHAN

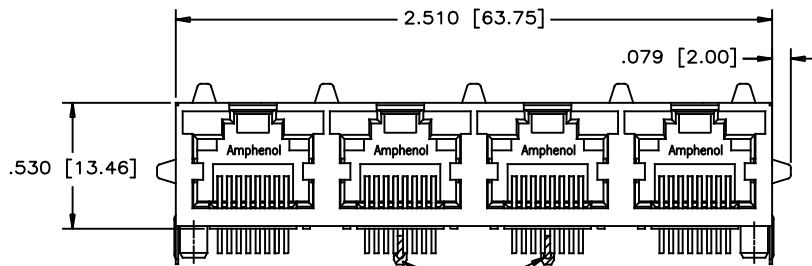

FRONT VIEW

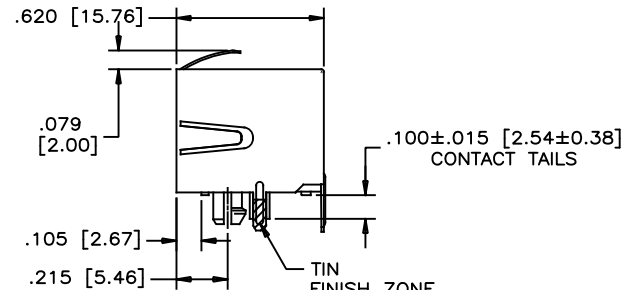

SIDE VIEW

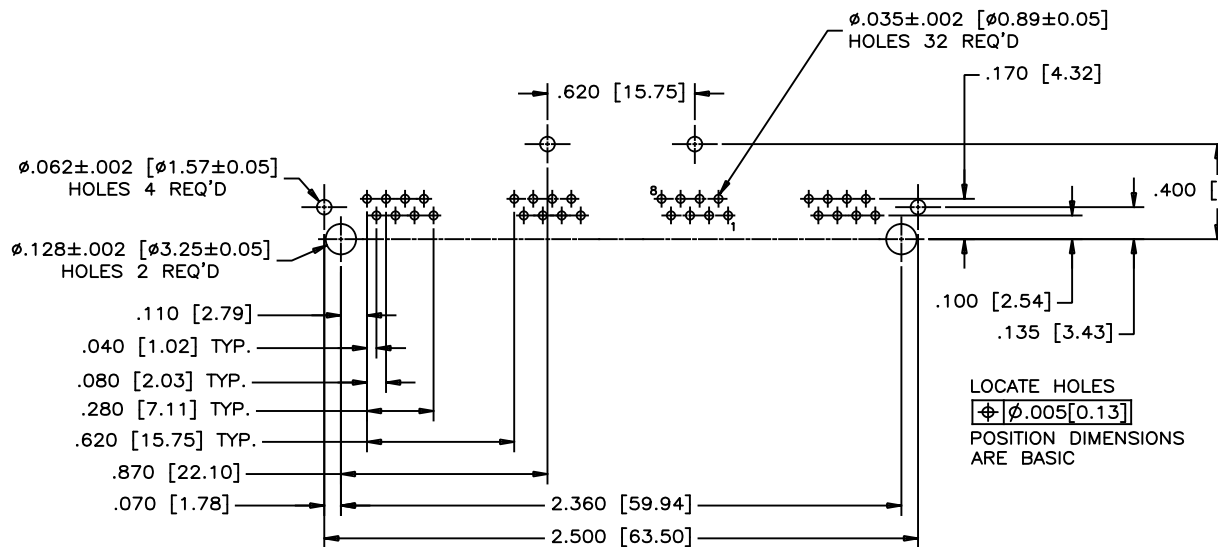

RECOMMENDED P.C.B. LAYOUT
(Component Side of Board)

MATERIALS:
PLASTIC HOUSING: HIGH TEMPERATURE THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0,
COLOR BLACK


CONTACTS:
PHOSPHOR BRONZE
PLATING: GOLD PLATING ON MATING SURFACE.
[SEE PART NUMBER FOR THICKNESS]
50 μ" [1.27 MICRONS]
MIN. NICKEL UNDERPLATE
100 μ" [2.54 MICRONS]
MIN. MATTE TIN ON CONTACT TAILS.

SHIELD: STAINLESS STEEL WITH MATTE TIN FINISH ON SOLDER TAIL

RECOMMENDED SOLDERING TEMPERATURE:
WAVE SOLDERING AT 260°C MAXIMUM FOR
5 SEC MAXIMUM.

PART NUMBER: RJHSE-X380-04

GOLD PLATING
E=RJ45 FLAT CONTACT 6u"
G=RJ45 FLAT CONTACT 15u"
J=RJ45 FLAT CONTACT 30u"
5=RJ45 FLAT CONTACT 50u"

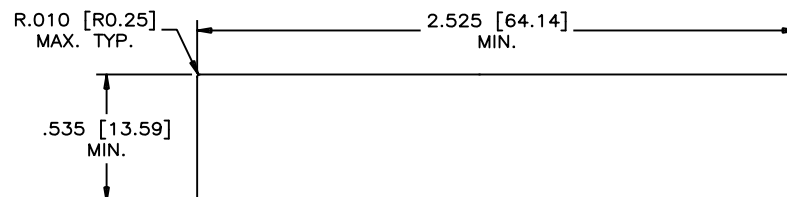

RECOMMENDED PANEL CUTOUT

UNLESS SPECIFIED OTHERWISE		DRAWN W.QIU	DATE APR 09/18	Amphenol Canada Corp. Commercial Products 4 PORT, HIGH SPEED, MODULAR JACK, 8 POSITION, 8 CONTACTS, SHIELDED W/O LED'S - RoHS COMPLIANT P-RJHSE-X380-04 CODE ID NO. 03554 DWG SIZE: C SCALE: N/A SHEET 1 OF 1
PRIMARY UNITS	INCH	CHECKED L.CHAN	DATE APR 09/18	
SECONDARY	MILLIMETERS	M.E. APP'D		
REFERENCE IN PARENTHESES		Q.A. APP'D		
GENERAL TOLERANCES		DWG APPR.		
1 DECIMAL PLACE	±0.025	ENG. REL. NO.		DWG. NO. P-RJHSE-X380-04 REV B
2 DECIMAL PLACES	±0.020	REF.		
3 DECIMAL PLACES	±0.015	THIRD ANGLE PROJECTION		
ANGULAR DEGREES	±1.0°	DO NOT SCALE DRAWING		