


注記
NOTES:

- 材料(MATERIAL)
 ウェハー : ポリアミド, UL94V-0 (色: アイボリー)
 WAFER: POLYAMIDE, UL94V-0 (COLOR: IVORY)
 ピン: □0.635 黄銅、銅下地錫めっき
 PIN: □0.635 BRASS, TIN 5μMIN. OVER COPPER 2.5μMIN. PLATING.
 6極以上に適合。
 TO BE APPLIED FOR 6 CKT. AND ABOVE.
 5極以下はロック部スリットなし。
 NO SLIT IS PROVIDED FOR 5 CKT. AND LESS THAN 5 CKT.

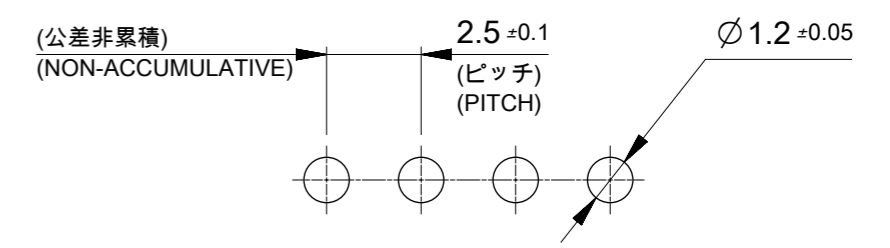

基板取付穴推奨寸法
RECOMMENDED P.C. BOARD HOLE DIM.

1.35	0.85	35	35	22041151	5045-15A	15
1.35	0.85	32.5	32.5	22041141	5045-14A	14
1.35	0.85	30	30	22041131	5045-13A	13
1.35	0.85	27.5	27.5	22041121	5045-12A	12
1.35	0.85	25	25	22041111	5045-11A	11
1.35	0.85	22.5	22.5	22041101	5045-10A	10
1.35	0.85	20	20	22041091	5045-09A	9
1.35	0.85	17.5	17.5	22041081	5045-08A	8
1.35	0.85	15	15	22041071	5045-07A	7
1.35	0.85	12.5	12.5	22041061	5045-06A	6
1.35	0.85	10	10	22041051	5045-05A	5
1.35	0.85	7.5	7.5	22041041	5045-04A	4
1.2	1	5	5	22041031	5045-03A	3
1.2	1	2.5	2.5	22041021	5045-02A	2
(D)	(C)	(B)	(A)	ORDER NO.	ENG. NO.	CKT.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS mm	SCALE 5:1	CURRENT REV DESC: PLATING DETAILS WAS INCLUDED	molex			
GENERAL TOLERANCES (UNLESS SPECIFIED)						
ANGULAR TOL	± 3.0 °	EC NO: 830929	PRODUCT CUSTOMER DRAWING			
4 PLACES	± 0.4	DRWN: VKAMAK 2025/08/06	DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
3 PLACES	± 0.4	CHK'D: VKAMAK 2025/08/07	SD-5045-NA	PSD	001	N1
2 PLACES	± 0.4	APPR: SMURUGESAN 2025/08/07	INITIAL REVISION:			
1 PLACE	± 0.4	DRWN: KKOHAMA 2000/03/27	APPR: NUKITA 2013/06/13			
0 PLACES	± 0.4	DRWN: KKOHAMA 2000/03/27	APPR: NUKITA 2013/06/13			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	THIRD ANGLE PROJECTION	DRAWING A3-SIZE	SERIES 5045	MATERIAL NUMBER SEE CHART	CUSTOMER GENERAL MARKET	SHEET NUMBER 1 OF 1