
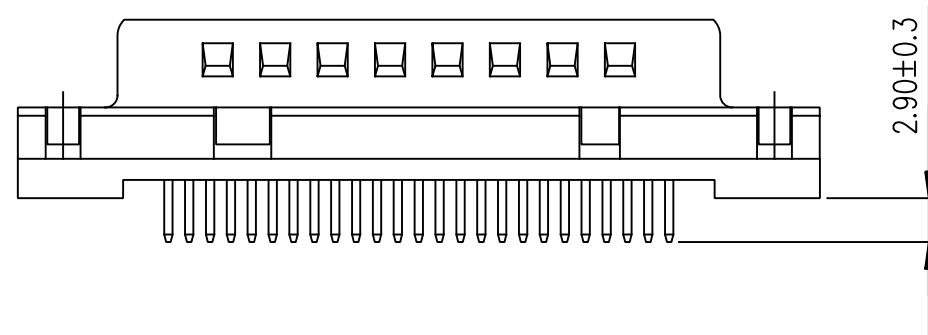
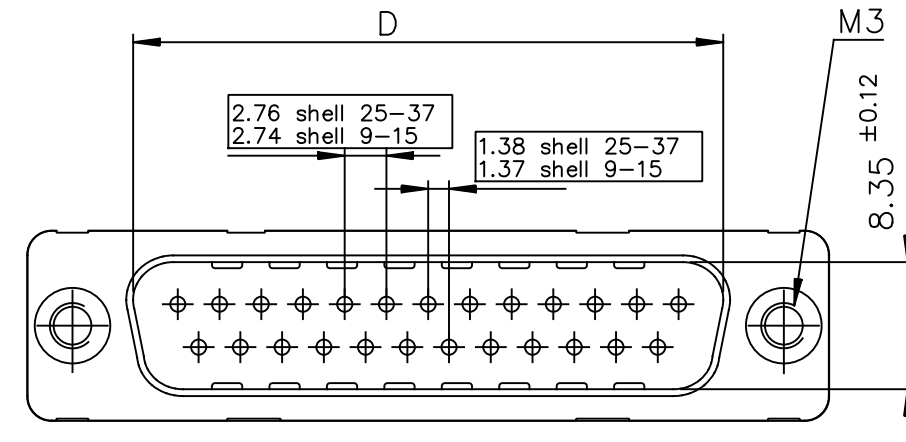
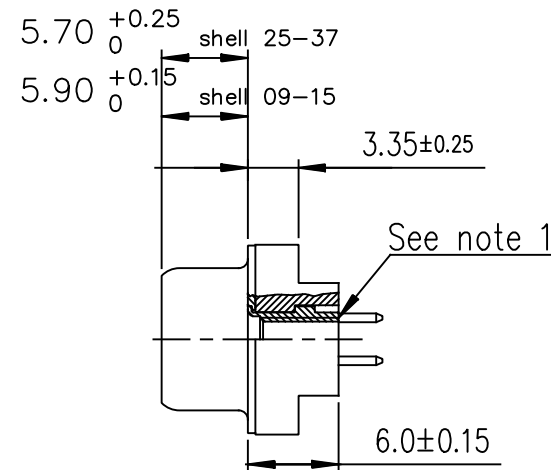


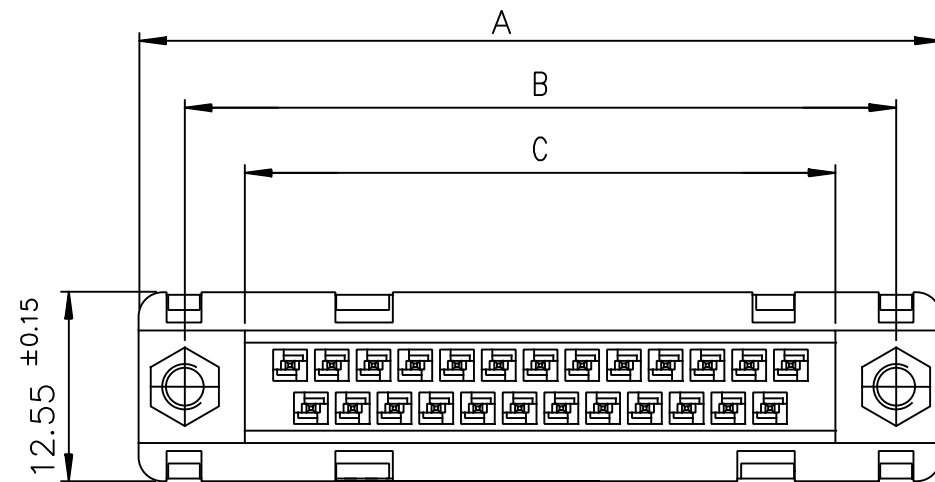


PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.79	10.96	D09P24A.PL00LF
15	39.14	33.32	25.18	25.12	19.18	D15P24A.PL00LF
25	53.03	47.04	39.12	38.84	33.12	D25P24A.PL00LF
37	69.32	63.50	55.68	55.30	49.68	D37P24A.PL00LF

PERFORMANCE CLASS : 4 - 200 MATING CYCLES
PERFORMANCE CLASS : 6 - 500 MATING CYCLES



PC card drilling dimensions(after plating)
(thickness 1.60±0.20mm)

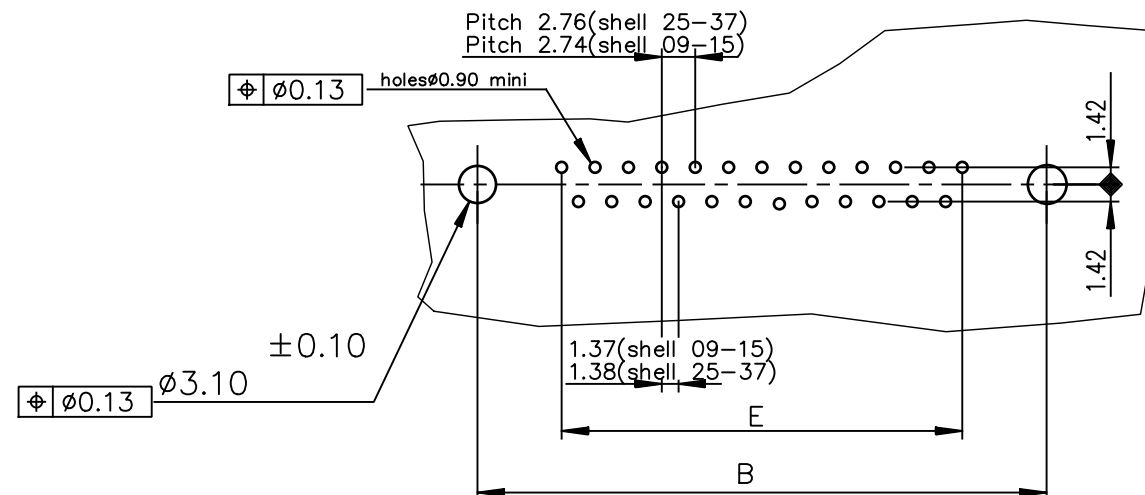

Notes:

1) The nut can protrude above the surface of insulator but maintaining the footprint dimension 6.0±0.15 mm.

GENERAL CHARACTERISTICS AND ROHS INFORMATION:
SEE DRAWING C01-8646-0000

mat'l. code SEE NOTE				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family D-SUB											
ltr	ecn no	dr	date	tolerances unless otherwise specified							title										
H	ELX-I-21256	AB	2015-07-14	angles linear			.0±0.1		MALE CONNECTOR DELTA-D STRAIGHT – SOLDER TYPE												
J	ELX-I-59406	DJ	2026-02-11				.00±0.1														
					0°±2°		.000±0.1														
									scale 2:1												
				dr	LELEON		1992-09-10			dwg no sheet 1 of 4 size											
				engr	DIPU JOSEPH		2026-02-11														
				chr	GREGAR M		2026-02-11														
				appd	ALEX BABU		2026-02-11		Amphenol FCi	C01-8646-0096										A3	
sheet index		revision sheet		J	1																