

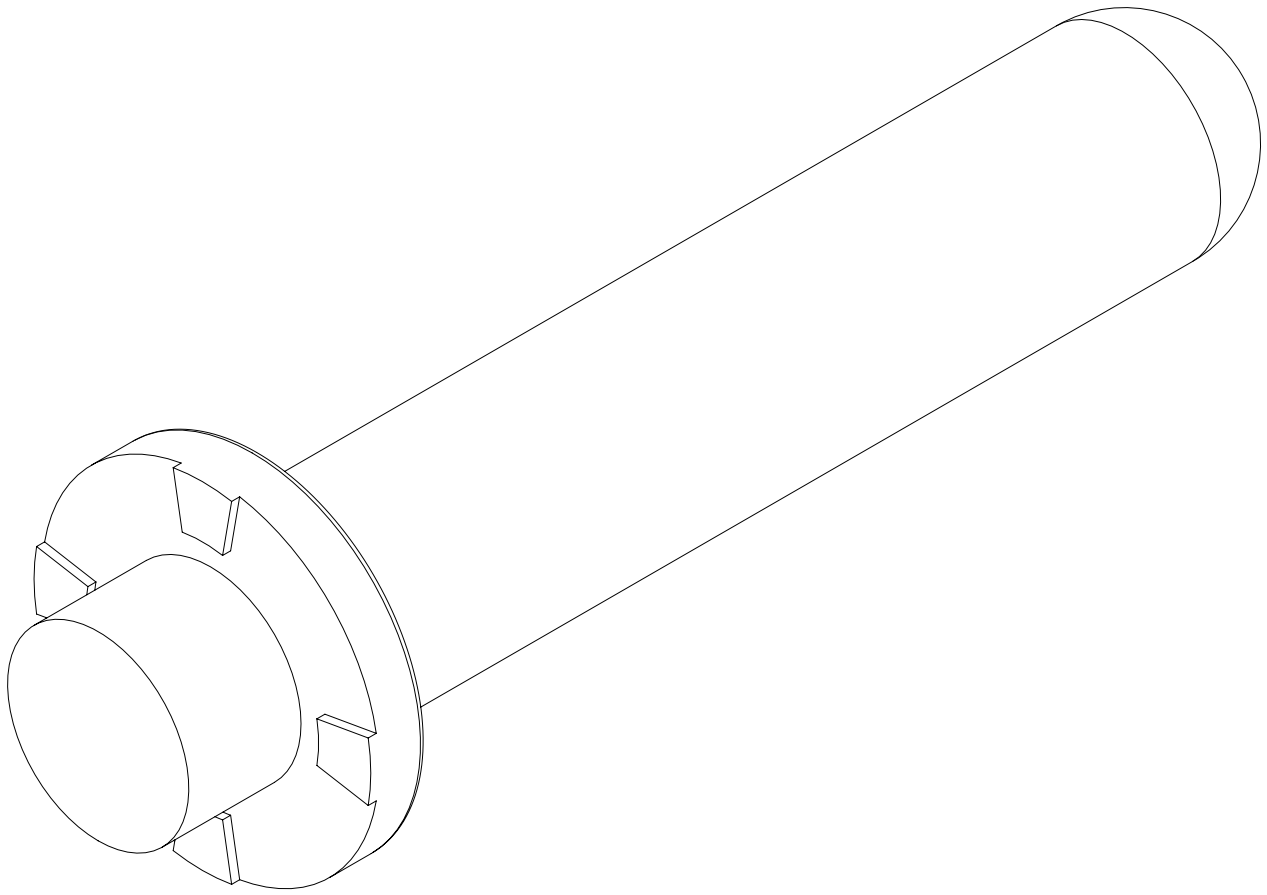


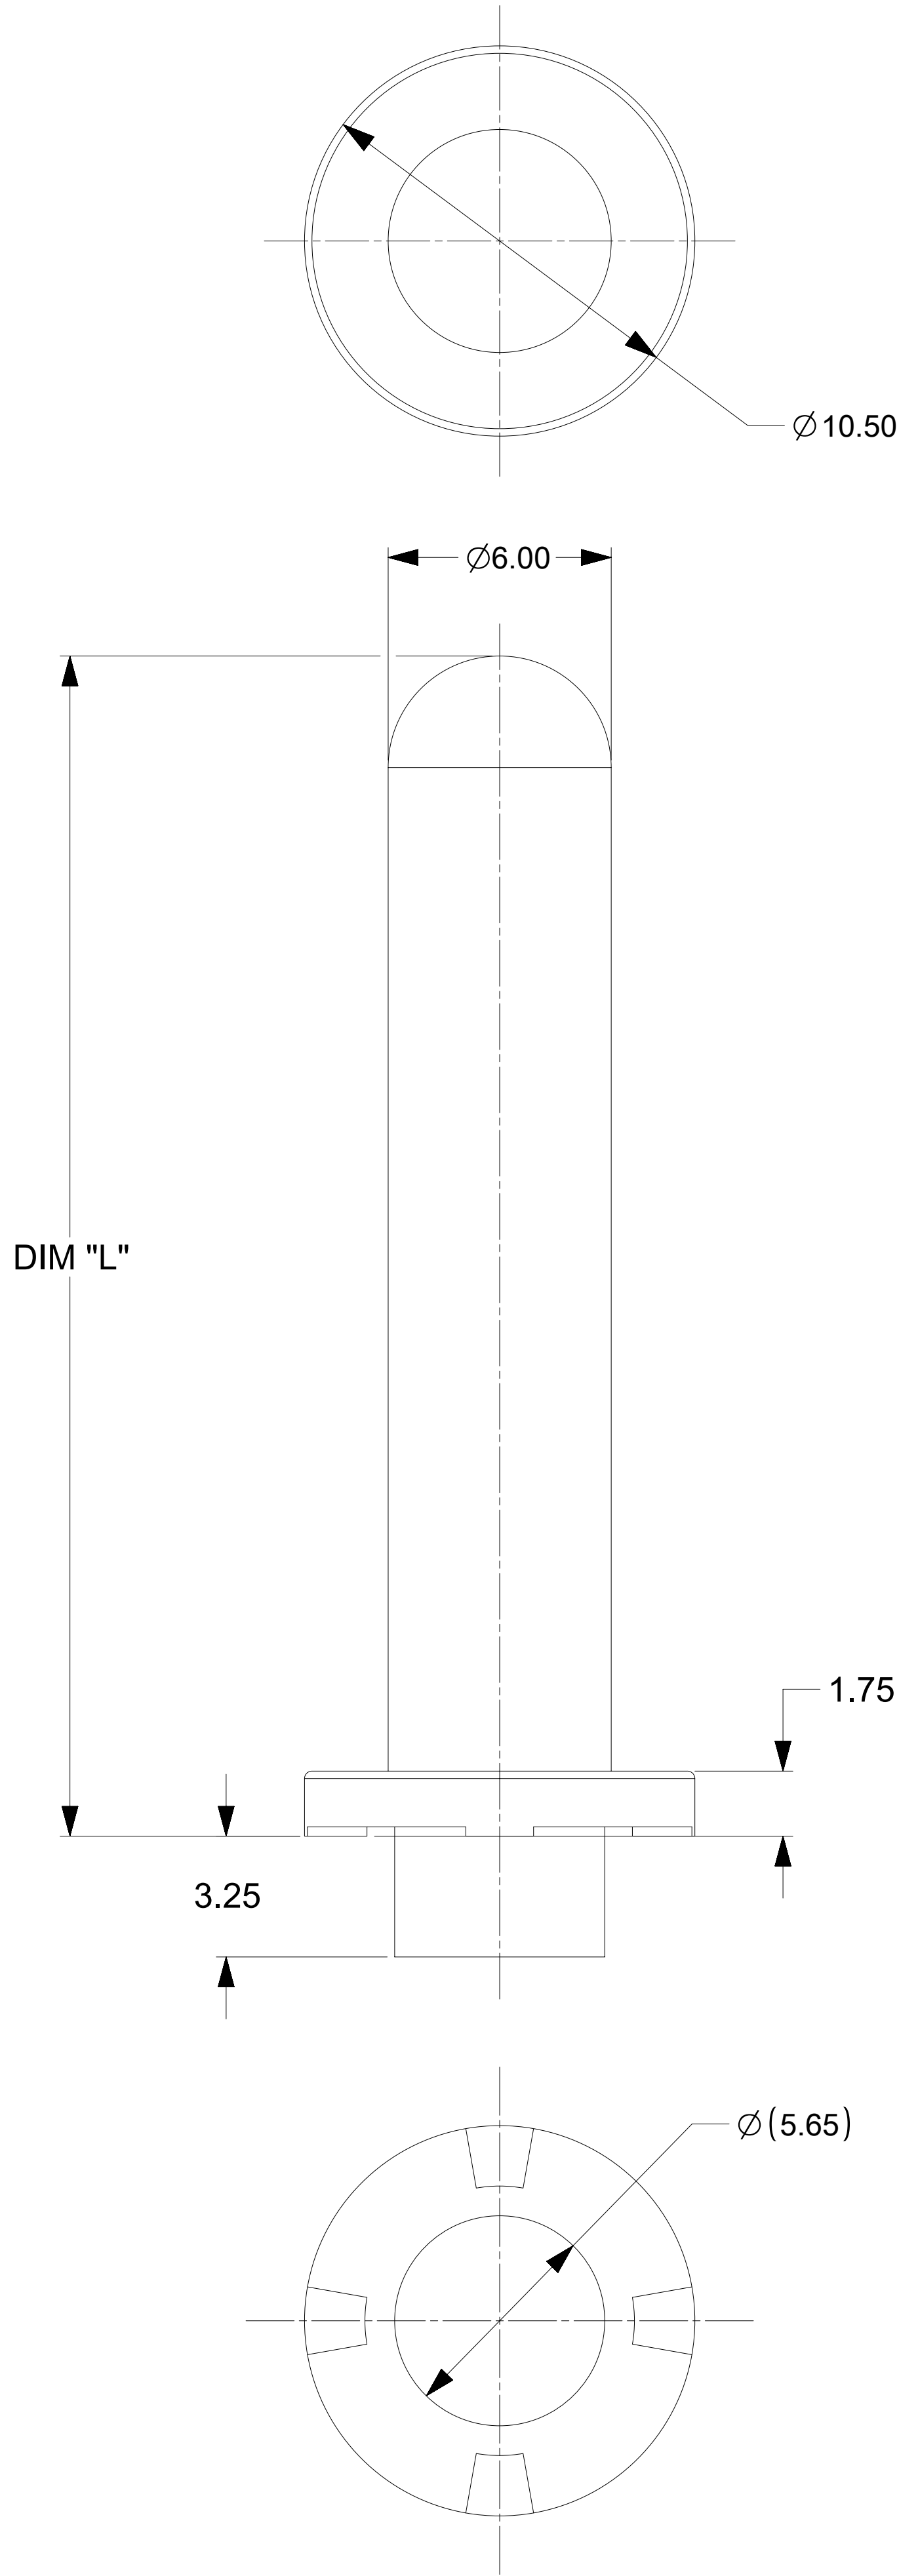

ISOMETRIC VIEW OF THE PIN
(CENTRALITY MALE PIN, 6.00MM, SURFACE MOUNT)

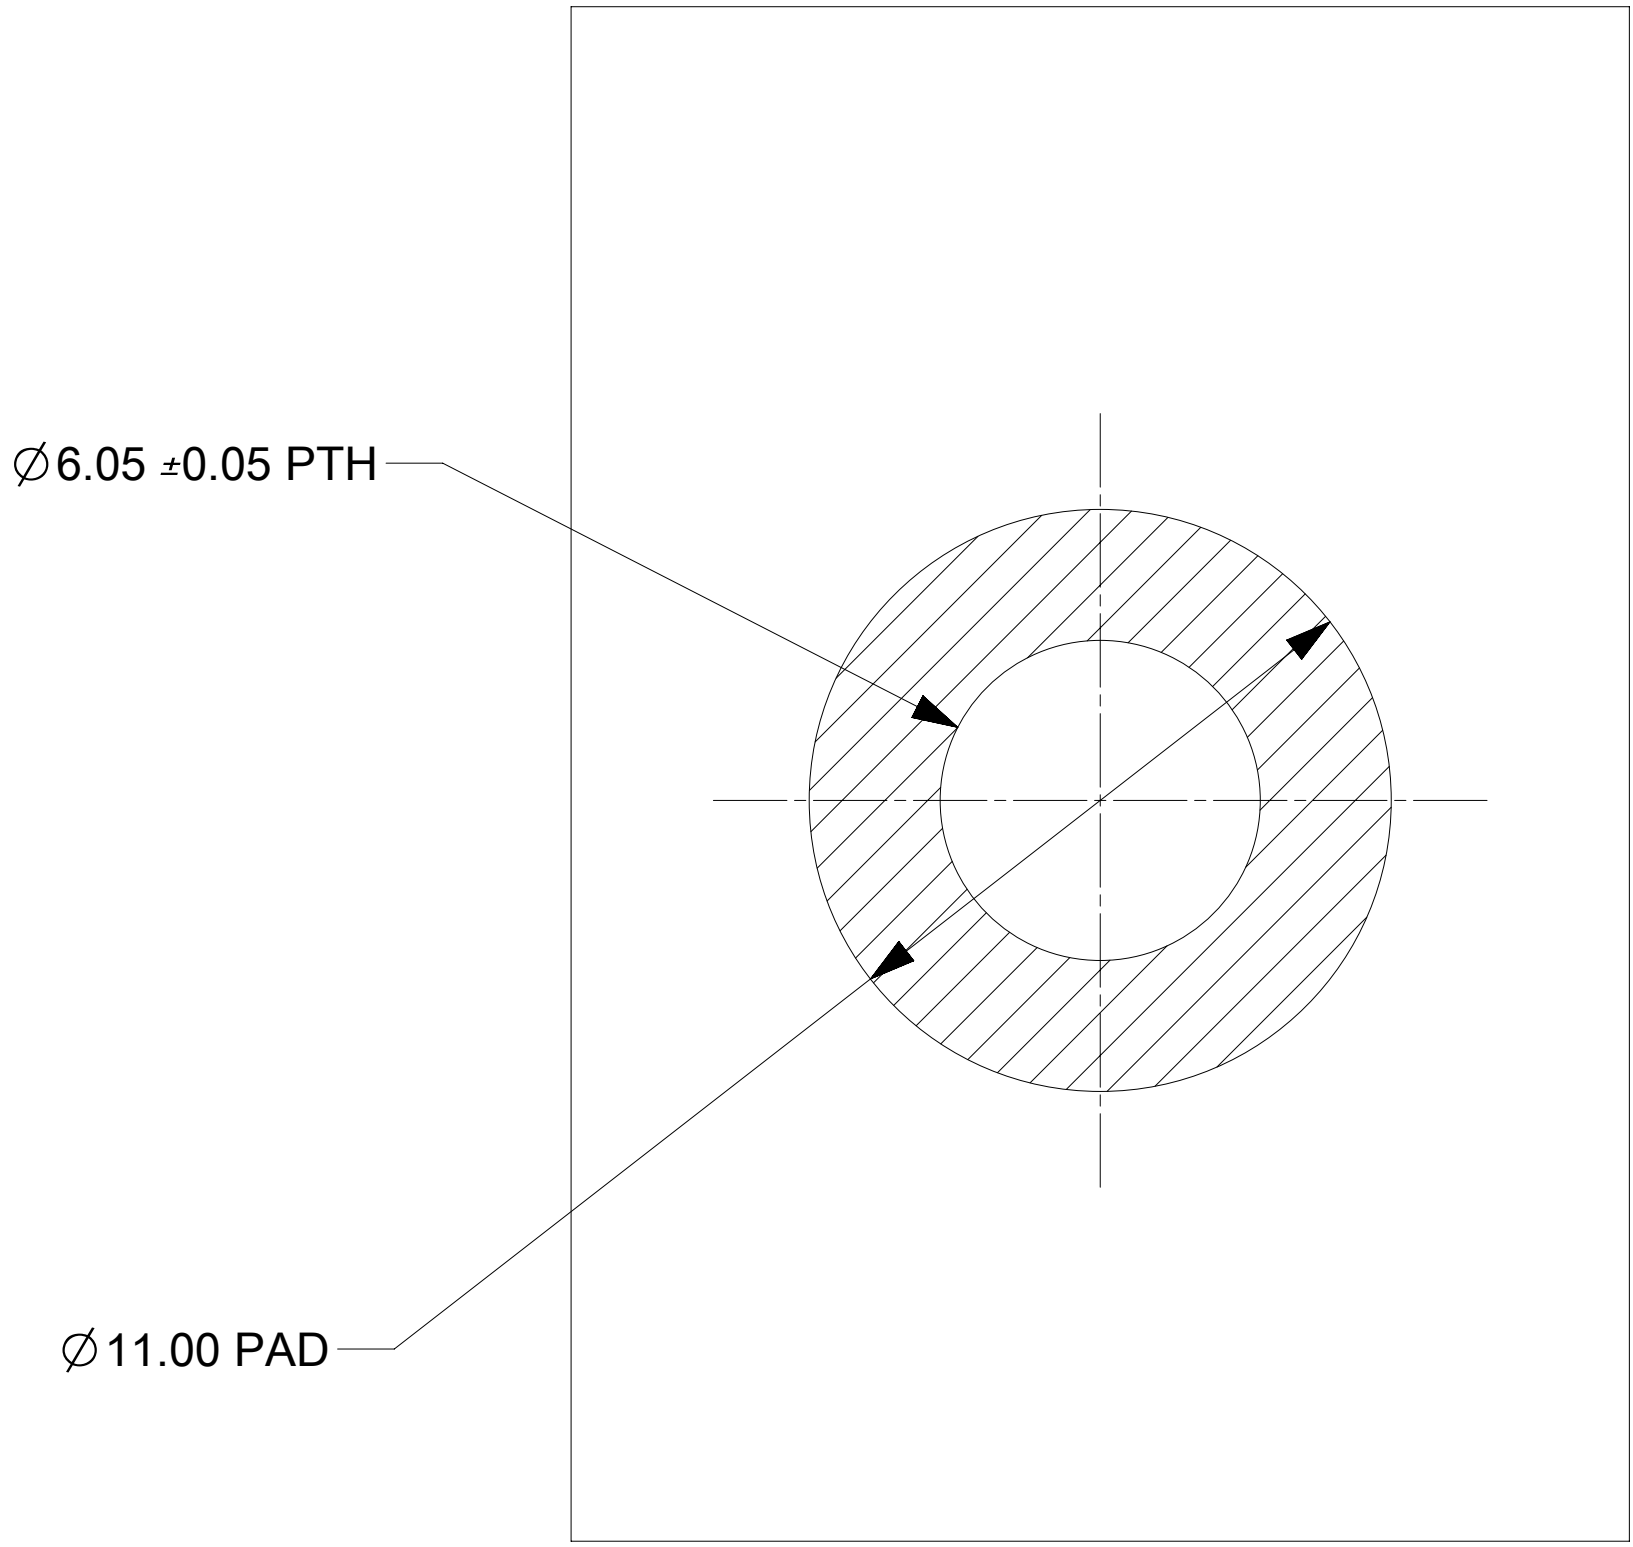

RECOMMENDED PCB LAYOUT

NOTES :

- MATERIALS:
 - BASE METAL: HIGH CONDUCTIVE COPPER ALLOY
 - PLATING ON BODY: 3.18 MICRON MIN SILVER OVER 1.27 MICRON MIN NICKEL
- PRODUCT SPECIFICATION: 2043130006-PS
- APPLICATION SPECIFICATION: 2043130006-AS
- PACKAGING SPECIFICATION: 2032630006-PK
- SILVER COMPONENTS WILL BE SUPPLIED TARNISH FREE BUT MAY TARNISH OVER TIME
- MINIMUM RECOMMENED PCB THICKNESS 1.58MM

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION														
DIMENSION UNITS		SCALE		CURRENT REV DESC: ADDED NEW P/N 203263-0316			mo lex SENTRALITY 6.00MM MALE TERMINAL SURFACE MOUNT							
mm		5:1												
GENERAL TOLERANCES (UNLESS SPECIFIED)														
ANGULAR TOL		± 0.5 °					PRODUCT CUSTOMER DRAWING							
4 PLACES		±		DOCUMENT NUMBER						DOC TYPE		DOC PART	REVISION	
3 PLACES		±		EC NO: 843330			2032630136-SD		PSD		000		A15	
2 PLACES		± 0.15		DRWN: MOHDSM6 2025/12/16										
1 PLACE		± 0.25		CHK'D: MOHDSM6 2026/01/08										
0 PLACES		±		APPR: HTHYAGARAJ 2026/01/08										
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				INITIAL REVISION:										
				DRWN: RLOW 2019/06/05										
				APPR: BPISZCZOR 2019/06/10										
THIRD ANGLE PROJECTION				DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER			SHEET NUMBER	
 				D-SIZE		203263		SEE TABLE		GENERAL MARKET			1 OF 1	

A15

PART NUMBER	DIMENSION "L" (MM)
203263-0106	26.00
203263-0116	20.00
203263-0126	14.00
203263-0136	31.75
203263-0146	29.50
203263-0156	16.00
203263-0176	37.20
203263-0186	31.00
203263-0196	26.75
203263-0206	16.80
203263-0226	21.50
203263-0246	36.00
203263-0256	48.00
203263-0266	27.70
203263-0276	12.00
203263-0286	12.50
203263-0296	22.00
203263-0306	22.85
203263-0316	26.66

DOCUMENT STATUS	P1	RELEASE DATE	2026/01/08	06:12:26
-----------------	----	--------------	------------	----------