
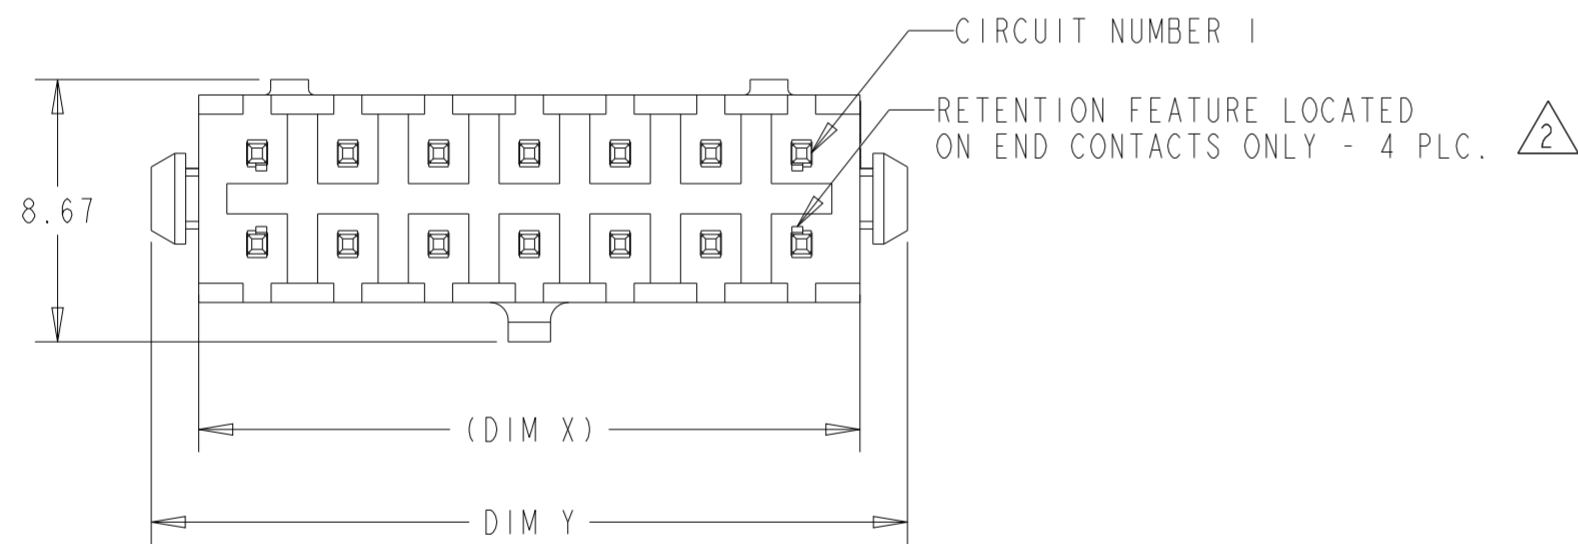
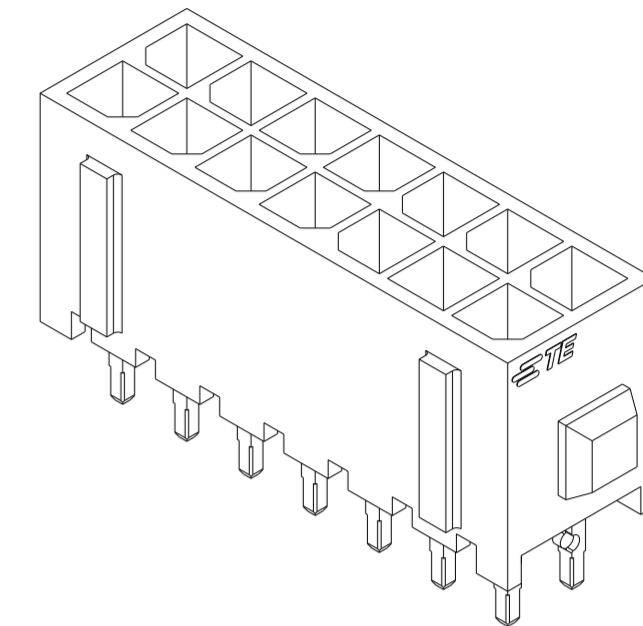
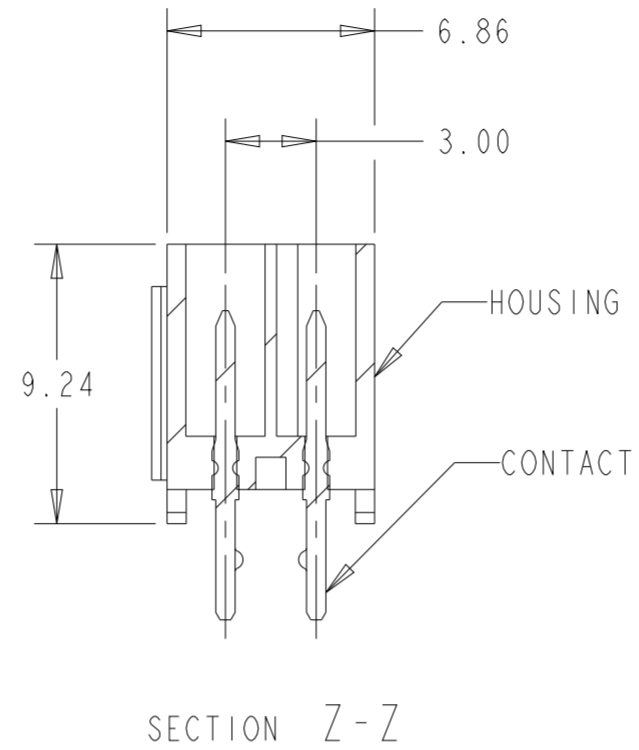


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
E4		REVISED PER ECN-23-240910	27NOV2023	WLS VS
E5		REVISED PER ECN-24-279340	20AUG2024	WLS JP
F		REVISED PER ECN-25-323497	04JUN2025	WLS JP
F1		REVISED PER ECN-25-339016	20AUG2025	WLS JP

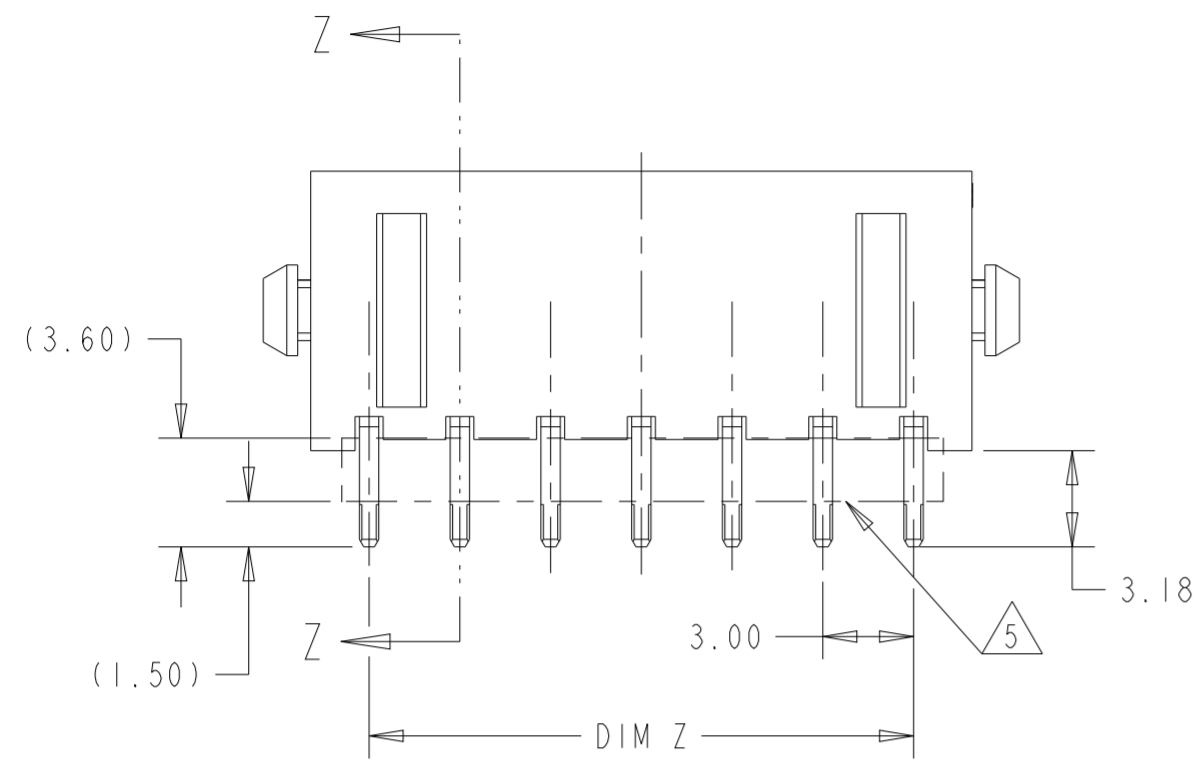


- 1 MATERIAL: HOUSING - UL 94V-0 RATED HIGH TEMP. , NYLON, COLOR BLACK.
CONTACT - BRASS.
- 2 MAXIMUM INSERTION 30 LBS.
- 3 RECOMMENDED BOARD THICKNESS 1.57.
- 4 FINISHING: CONTACT - 0.38µm MINIMUM GOLD,
OR
0.0762µm MINIMUM GOLD FLASH OVER 0.31µm MINIMUM PALLADIUM NICKEL,
ON MATING AREA PER TE CONNECTIVITY'S DISCRETION,
2.54µm MINIMUM MATTE TIN ON SOLDER TAILS.
ALL OVER 1.27µm MINIMUM NICKEL.
- 5 CUTTING AREA REGION, NO PLATING IS PRESENT.
- 6 COUNTERPART RECOMMENDED IS PN 794617 (DASH ACCORDING TO NUMBER OF POSITION).
- 7 FOR REELING DIRECTION AND PACKAGING TYPE, SEE SPECIFICATION 114-13000.

	40.00	33.00	36.86	24	5-794631-4
OBSOLETE	37.00	30.00	33.86	22	5-794631-2
OBSOLETE	34.00	27.00	30.86	20	5-794631-0
	31.00	24.00	27.86	18	4-794631-8
	28.00	21.00	24.86	16	4-794631-6
OBSOLETE	25.00	18.00	21.86	14	4-794631-4
	22.00	15.00	18.86	12	4-794631-2
	19.00	12.00	15.86	10	4-794631-0
	16.00	9.00	12.86	8	3-794631-8
	13.00	6.00	9.86	6	3-794631-6
	10.00	3.00	6.86	4	3-794631-4
	7.00	-	3.86	2	3-794631-2
	DIM Y	DIM Z	DIM X	NO. OF POSN.	PART NUMBER


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. HAYMAKER 16AUG99	TE Connectivity																
DIMENSIONS: mm [INCHES]		CHK K. COBLE 16AUG99																	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD K. COBLE 16AUG99	NAME VERTICAL HEADER ASSEMBLY, THRU HOLE, 0.38Au or 0.31PdNi DUAL ROW, MICRO MATE-N-LOK™																
<table border="0"> <tr> <td>0 PLC</td> <td>±</td> </tr> <tr> <td>1 PLC</td> <td>±</td> </tr> <tr> <td>2 PLC</td> <td>±0.20</td> </tr> <tr> <td>3 PLC</td> <td>±</td> </tr> <tr> <td>4 PLC</td> <td>±</td> </tr> <tr> <td>ANGLES</td> <td>±1°</td> </tr> <tr> <td>FINISH</td> <td></td> </tr> </table>		0 PLC	±	1 PLC	±	2 PLC	±0.20	3 PLC	±	4 PLC	±	ANGLES	±1°	FINISH		PRODUCT SPEC 108-1836	SIZE A2		
0 PLC	±																		
1 PLC	±																		
2 PLC	±0.20																		
3 PLC	±																		
4 PLC	±																		
ANGLES	±1°																		
FINISH																			
MATERIAL		APPLICATION SPEC 114-13000	CAGE CODE 00779	DRAWING NO G-794631	RESTRICTED TO -														
<table border="0"> <tr> <td>1</td> <td>4</td> </tr> </table>		1	4	WEIGHT -	SCALE 4:1	SHEET 1 OF 2	REV F1												
1	4																		
CUSTOMER DRAWING																			

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
-	-	SEE SHEET 1	-	-

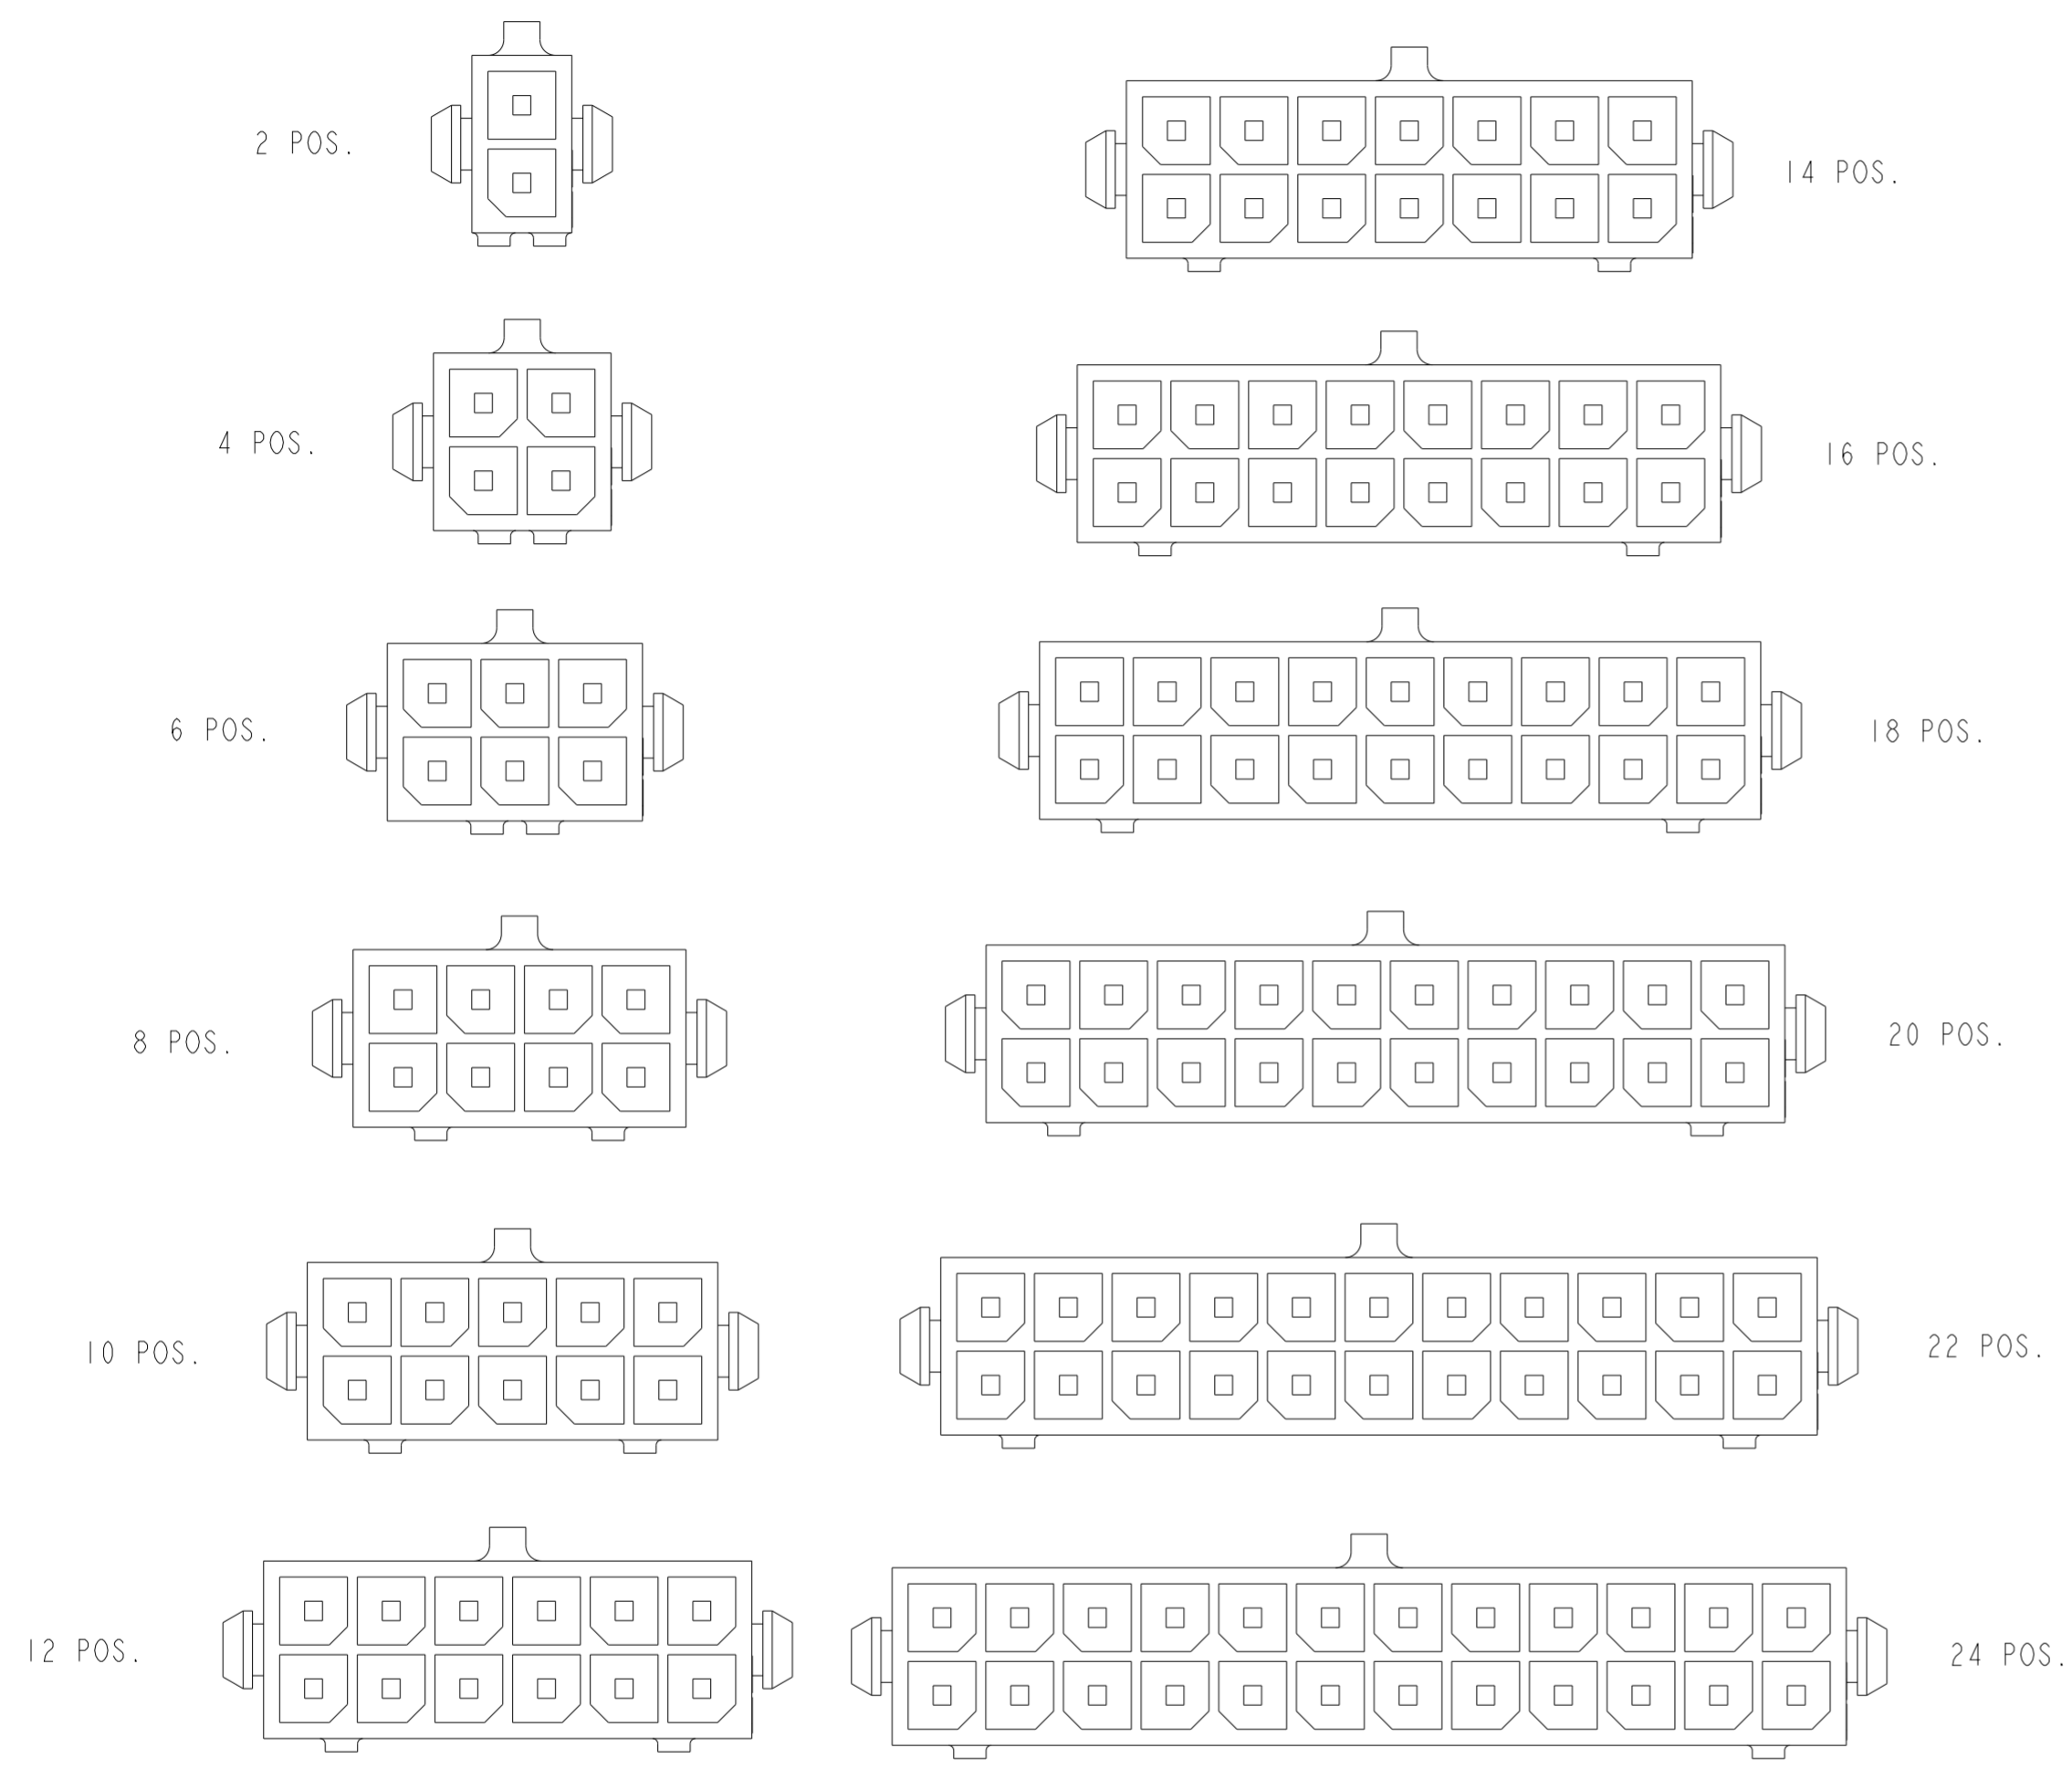

KEYING BY POSITION SIZE

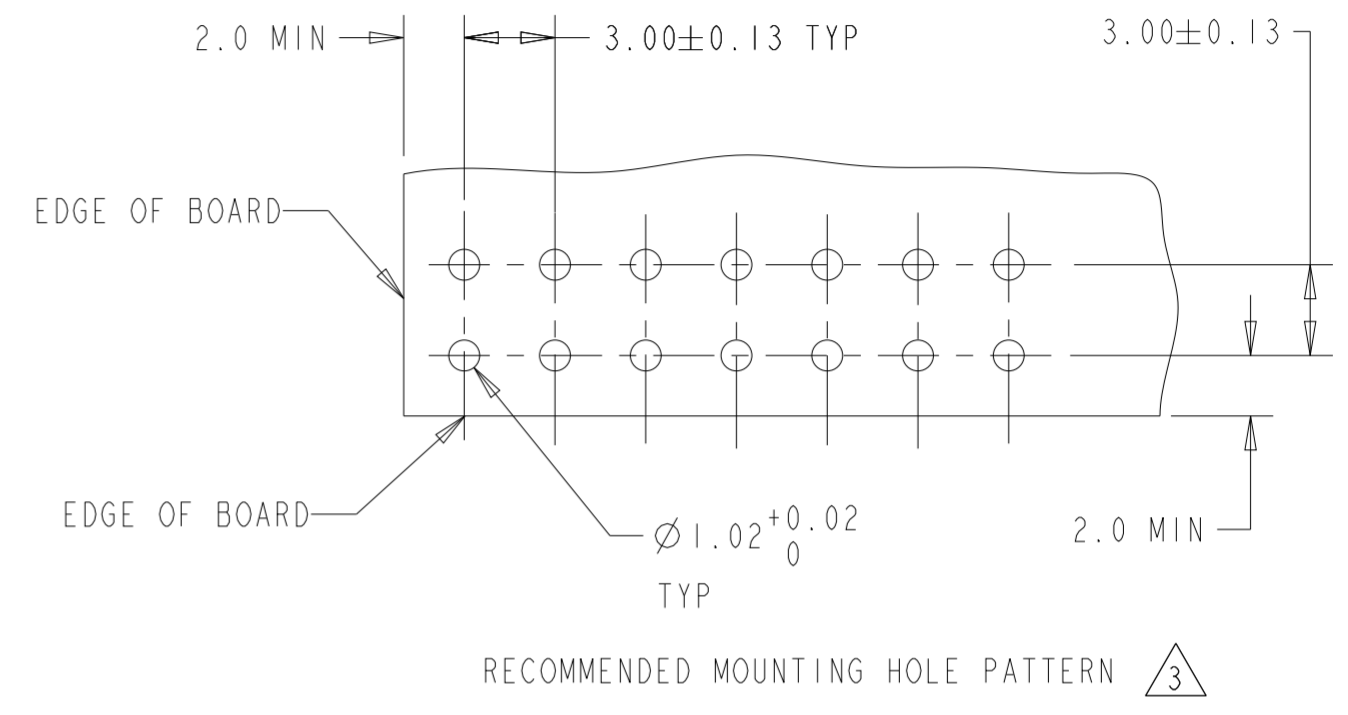

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. HAYMAKER 16AUG99	TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK K. COBLE 16AUG99		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD K. COBLE 16AUG99	NAME VERTICAL HEADER ASSEMBLY, THRU HOLE, 0.38Au or 0.31PdNi DUAL ROW, MICRO MATE-N-LOK	
		PRODUCT SPEC 108-1836	SIZE A2	CAGE CODE 00779
MATERIAL		APPLICATION SPEC 114-13000	DRAWING NO G-794631	RESTRICTED TO -
FINISH		WEIGHT -	SCALE 4:1	SHEET 2 OF 2
		CUSTOMER DRAWING	REV F1	