




MULTI-BEAM

TE Internal #: 6450553-2
PCB Mount Receptacle, Vertical, Board-to-Board, 6 Position, 5.08 mm / 7.62 mm [.2 in / .3 in] Centerline, Fully Shrouded, Gold
[View on TE.com >](#)

Connectors > PCB Connectors > PCB Headers & Receptacles

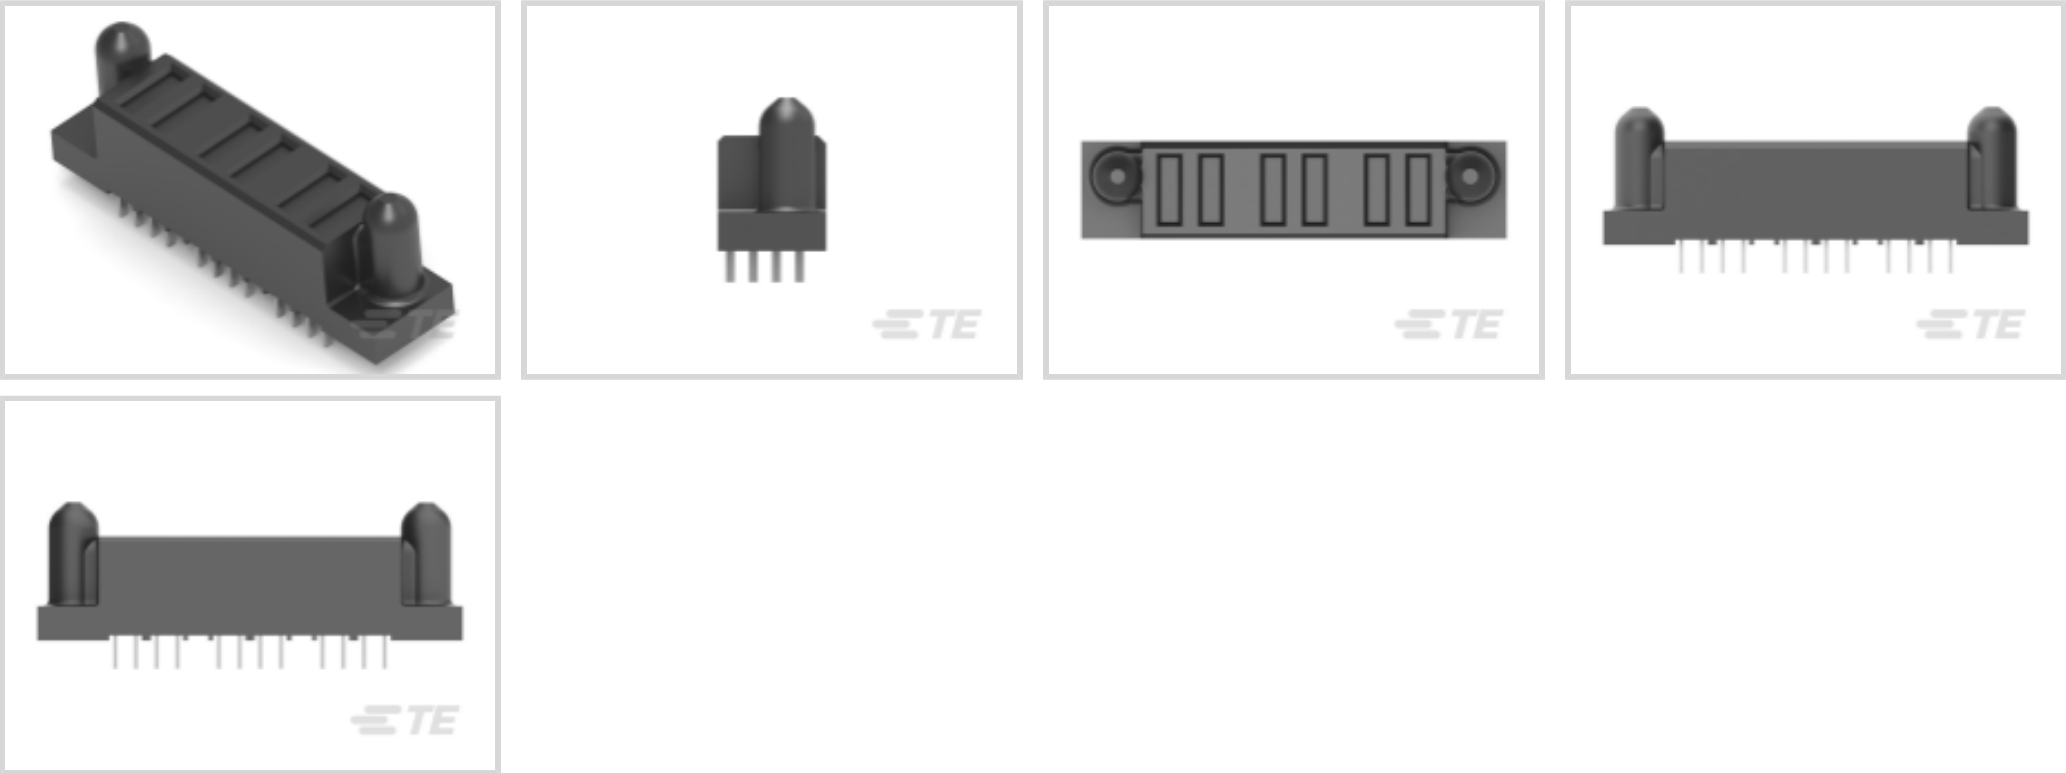

EU RoHS Compliance: **Compliant**
EU ELV Compliance: **Compliant**
PCB Connector Assembly Type: **PCB Mount Receptacle**
PCB Mount Orientation: **Vertical**
Connector System: **Board-to-Board**

Features

Other

EU RoHS Compliance	Compliant
EU ELV Compliance	Compliant

Product Type Features

Connector Shape	Rectangular
PCB Connector Assembly Type	PCB Mount Receptacle
Connector System	Board-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Columns	6
Number of Loaded Positions	6
Mating & Unmating Configuration	Sequencing
Number of Power Positions	6



PCB Mount Orientation	Vertical
Number of Positions	6
Number of Rows	1

Electrical Characteristics

Operating Voltage	60 VDC, 300 VDC
-------------------	-----------------

Body Features

Primary Product Color	Black
-----------------------	-------

Contact Features

Contact Underplating Material	Nickel
Contact Underplating Material Thickness	1.27 – 2.54 µm[50 – 100 µin]
Contact Mating Area Plating Material Thickness	.076 µm[3 µin]
PCB Contact Termination Area Plating Material Thickness	2.54 – 5.08 µm[100 – 200 µin]
Contact Layout	Inline
Contact Base Material	Copper Alloy
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material	Gold
Contact Type	Receptacle
Contact Current Rating (Max)	42 A

Termination Features

Termination Post & Tail Length	3.43 mm[.135 in]
Termination Method to PCB	Through Hole - Press-Fit

Mechanical Attachment

Mating Retention	Without
Mating Alignment Type	Guide Post
PCB Mount Retention	Without
PCB Mount Alignment	Without
Connector Mounting Type	Board Mount
Mating Alignment	With

Housing Features

Housing Material	High Temperature Thermoplastic Glass-Filled
Centerline (Pitch)	5.08 mm, 7.62 mm[.3 in][.2 in]



Dimensions

Connector Width	11.94 mm[.47 in]
PCB Thickness (Recommended)	2.11 – 2.62 mm[.083 – .103 in]
Connector Height	12.7 mm[.5 in]
Connector Length	52.07 mm[2.05 in]

Usage Conditions

Operating Temperature (Max)	105 °C[221 °F]
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

Glow Wire Rating	High Temperature Part - Not Glow Wire
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	44
Packaging Method	Tray

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products



will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 6450523-2
MBXL R/A HDR 6P

Customers Also Bought

TE Part #5767056-1
MICT,260,PLUG,38,ASSY,PDNI

TE Part #1827685-4
2mm pitch Battery Rec. Assy. 7Pos. RVS.

TE Part #1-1469491-4
MULTIGIG RT GUIDE PIN, 9MM 5.70

TE Part #2102343-2
CeeLok FAS-T, Recpt Kit, Sq, ZnNi

TE Part #1827654-2
2mm pitch Battery Plug Assy. 7P. H=4.0

TE Part #2102353-6
CeeLok FAS-T, Plug Kit, ZnNi, B

TE Part #2195846-8
FPC ANT, MHF4L, 200mm, 698-7125 MHz

TE Part #826884-2
HSG ECONOSEAL 2 POS GERMANY

TE Part #ZPF000000000000921
057-0590-80

TE Part #164307-E
ERMBGR FBUK GSE * M4 9999
ERMET-BAUSATZ

Documents

Product Drawings



MBXL VERT RCPT 6P

English

CAD Files

Customer View Model

ENG_CVM_CVM_6450553-2_E.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_6450553-2_E.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_6450553-2_E.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

POWER_CONNECTORS_CATALOG_SEC01_BOARD_TO_BOARD

English

2_PIECE_POWER_CONNECTORS_qrg_4-1773458-1

English

Product Specifications

Application Specification

English