



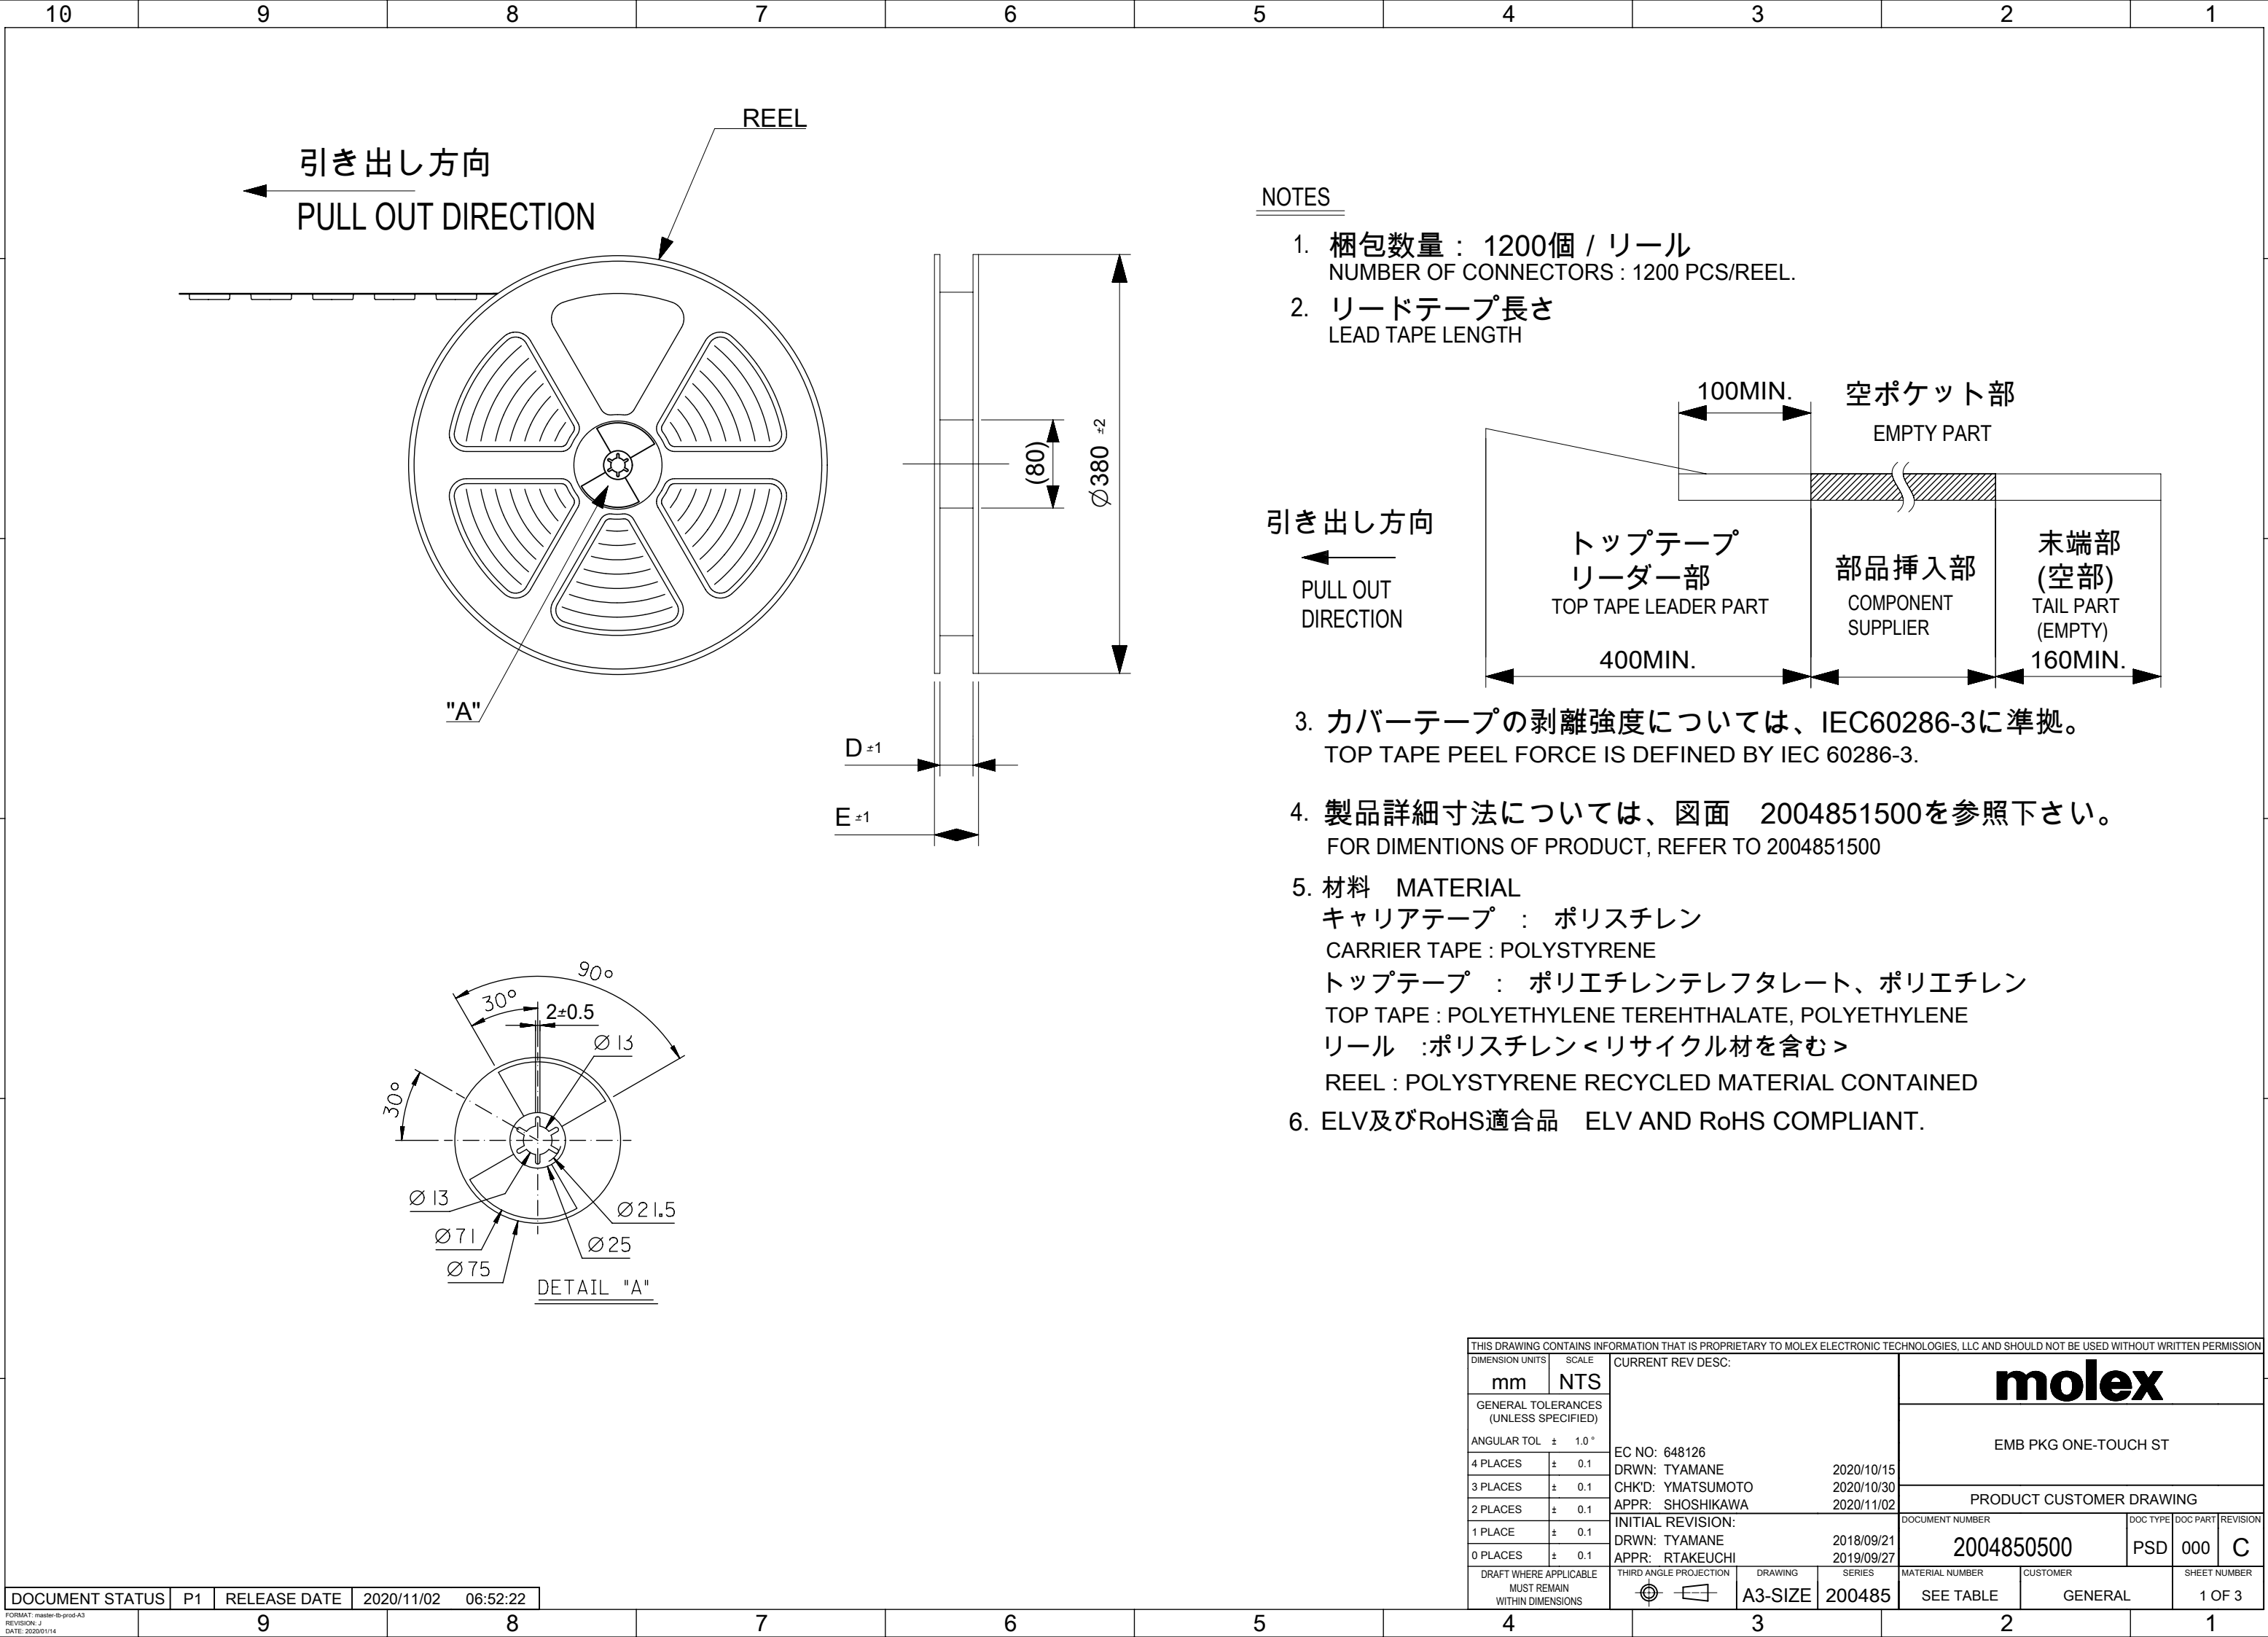

NOTES

1. 梱包数量： 1200個 / リール
NUMBER OF CONNECTORS : 1200 PCS/REEL.
2. リードテープ長さ
LEAD TAPE LENGTH

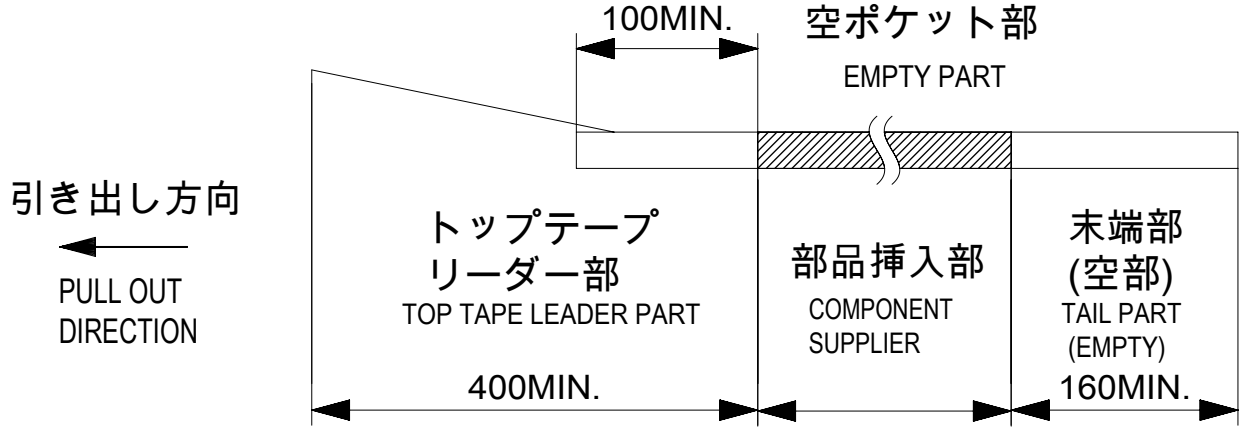

3. カバーテープの剥離強度については、IEC60286-3に準拠。
TOP TAPE PEEL FORCE IS DEFINED BY IEC 60286-3.
4. 製品詳細寸法については、図面 2004851500を参照下さい。
FOR DIMINTIONS OF PRODUCT, REFER TO 2004851500
5. 材料 MATERIAL
キャリアテープ : ポリスチレン
CARRIER TAPE : POLYSTYRENE
トップテープ : ポリエチレンテレフタレート、ポリエチレン
TOP TAPE : POLYETHYLENE TEREHTHALATE, POLYETHYLENE
リール :ポリスチレン<リサイクル材を含む>
REEL : POLYSTYRENE RECYCLED MATERIAL CONTAINED
6. ELV及びRoHS適合品 ELV AND RoHS COMPLIANT.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
DIMENSION UNITS		SCALE		CURRENT REV DESC:			molex				
mm		NTS									
GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 648126 DRWN: TYAMANE 2020/10/15 CHK'D: YMATSUMOTO 2020/10/30 APPR: SHOSHIKAWA 2020/11/02							
ANGULAR TOL ± 1.0 °											
4 PLACES		± 0.1									
3 PLACES		± 0.1									
2 PLACES		± 0.1									
1 PLACE		± 0.1		PRODUCT CUSTOMER DRAWING							
0 PLACES		± 0.1									
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				INITIAL REVISION: DRWN: TYAMANE 2018/09/21 APPR: RTAKEUCHI 2019/09/27			DOCUMENT NUMBER 2004850500		DOC TYPE PSD	DOC PART 000	REVISION C
THIRD ANGLE PROJECTION				DRAWING A3-SIZE	SERIES 200485	MATERIAL NUMBER SEE TABLE		CUSTOMER GENERAL		SHEET NUMBER 1 OF 3	

$$\overline{(1.85)}$$
 0.50 ± 0.05 (1.85)

A

$$1.50^{+0.10}_{-0.00}$$
 $0.20_{\pm 0.05}$ $H_{\pm 0.10}$

(G)

1.75

A logic diagram showing a NOT gate (inverter). The input is labeled 'A' and the output is labeled 'A-bar' (A with a horizontal bar over it).

1

(1.40)

累積ピッチ
ACCUMULATED PITCH

 4.0 ± 0.10 40 ± 0.20 12.0 ± 0.10
$$(3.82)$$

(5.85)

(3.86)

(6.57)

SECTION B-B


CONNECTOR NO. 20048515**


EMBOSSSED PACKAGE
オーダー番号 ORDER NO.

molex

2004850500


9

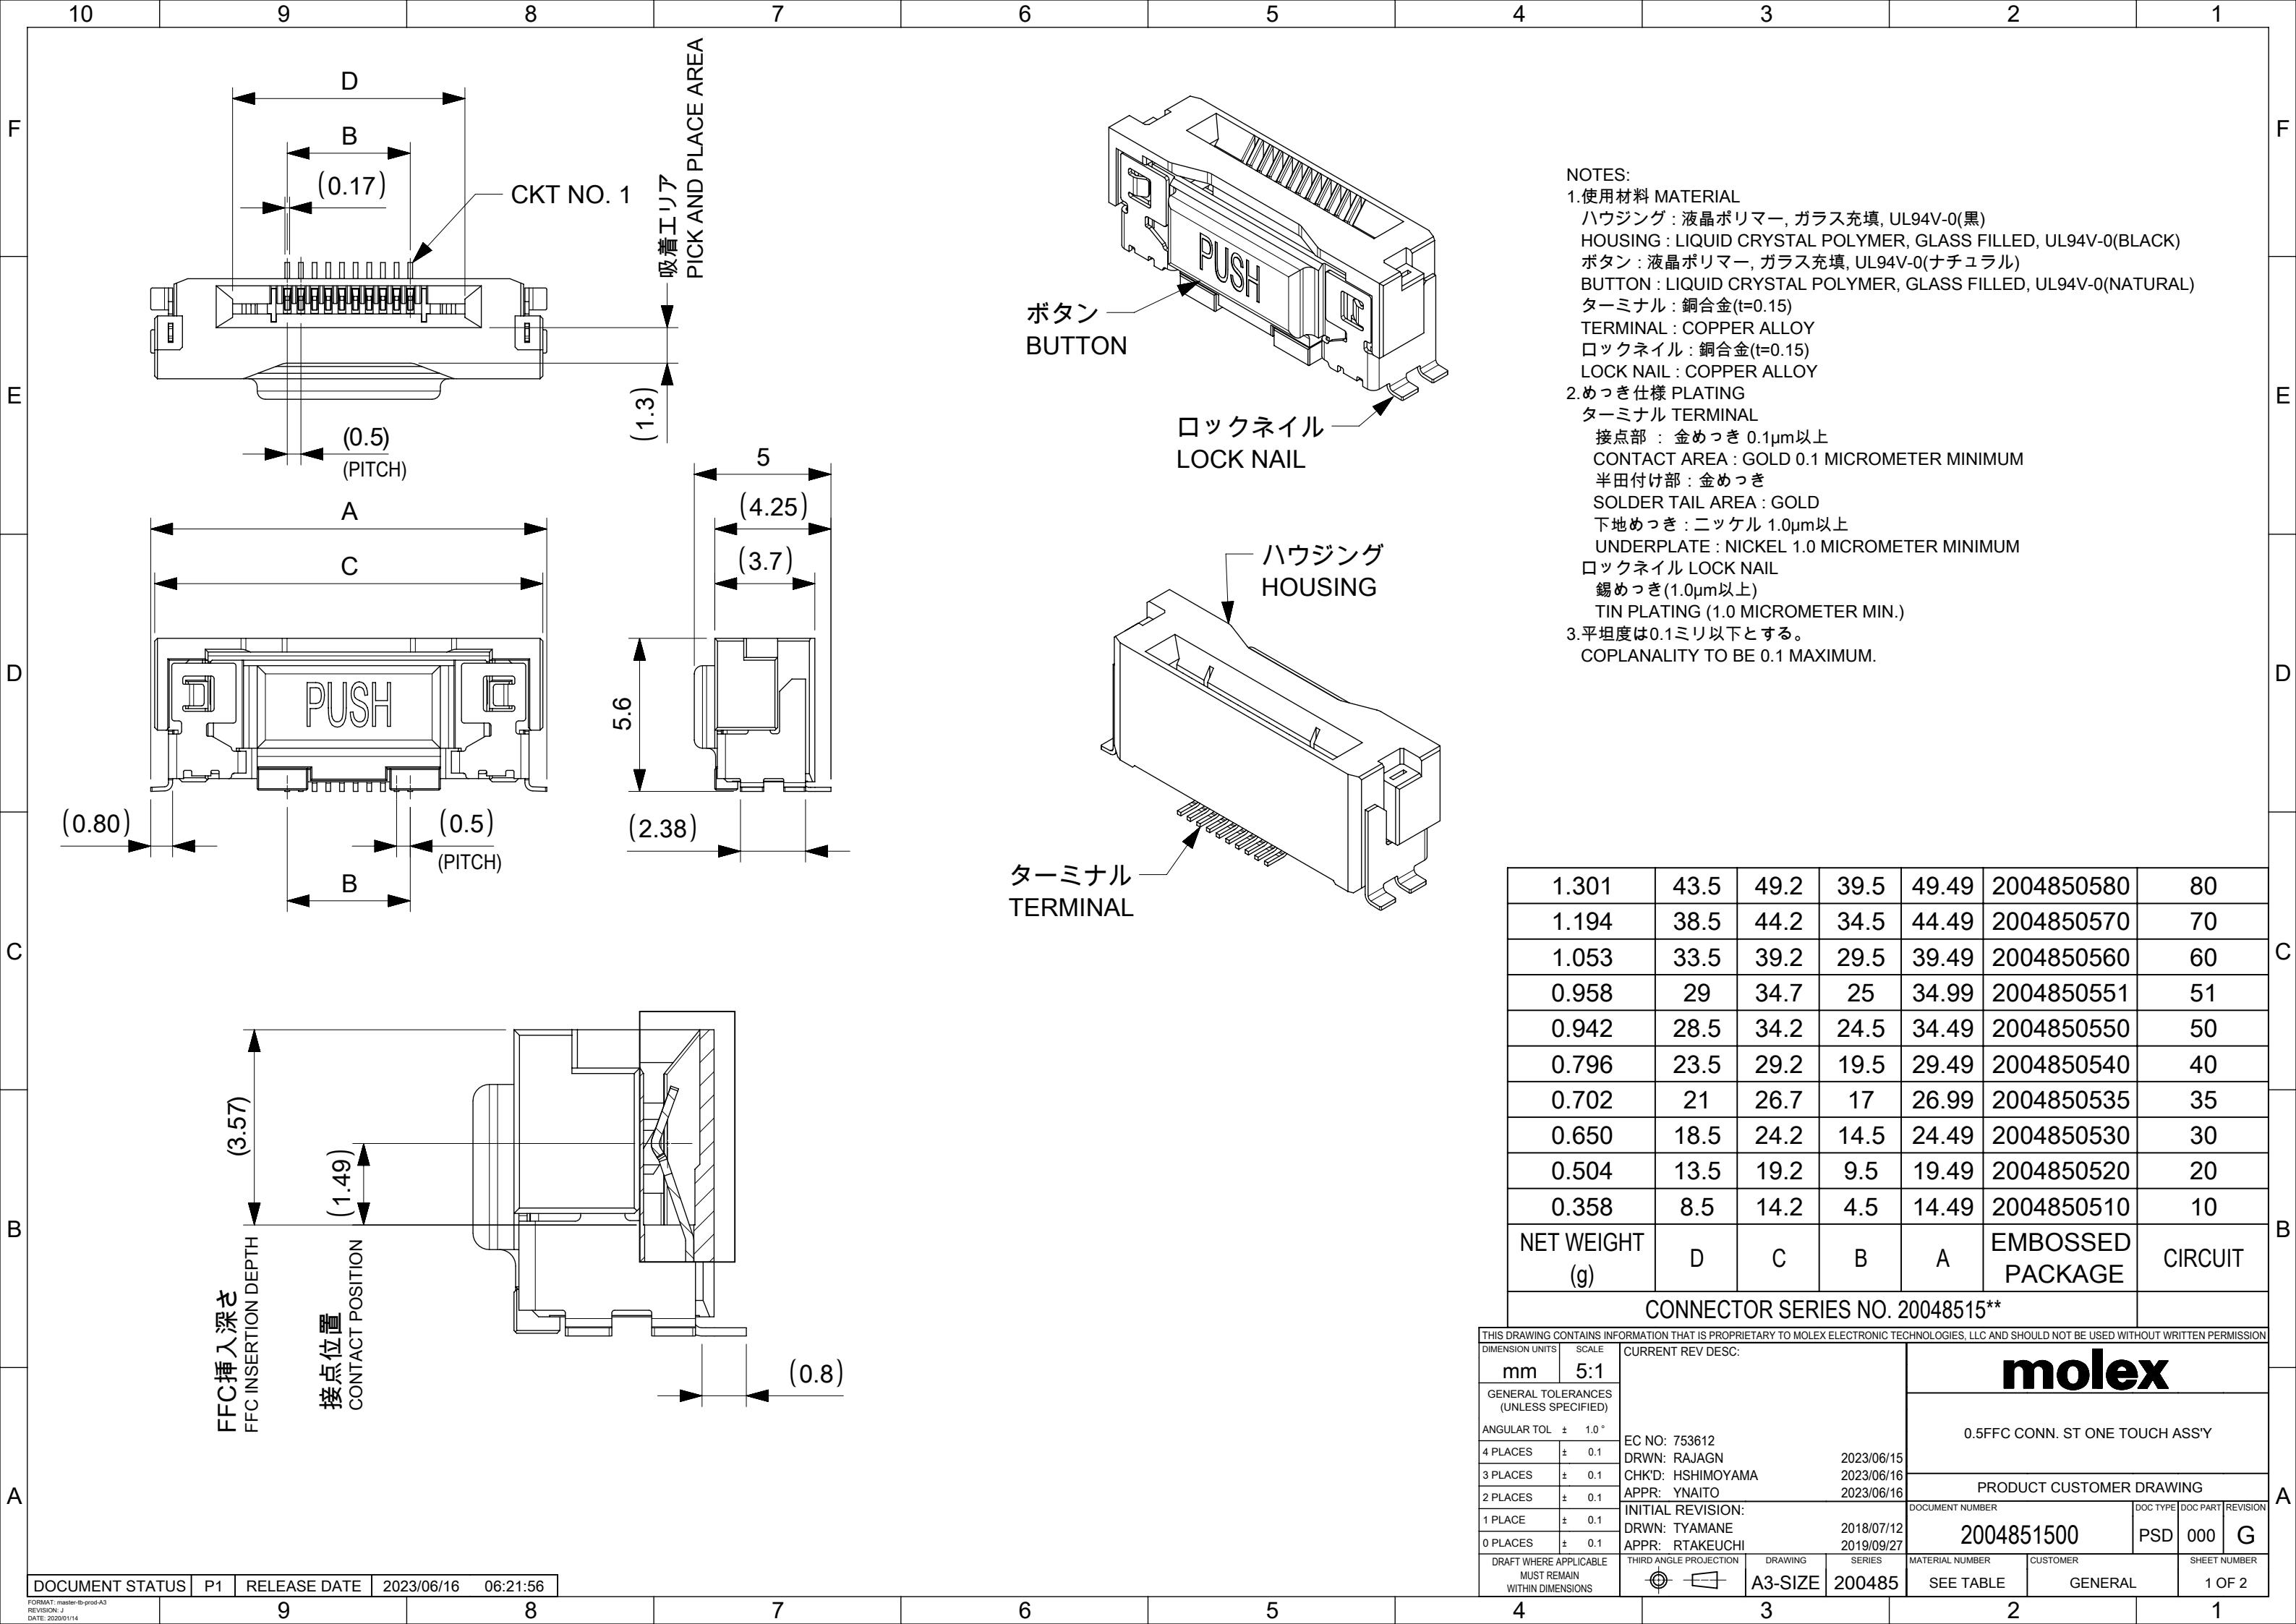

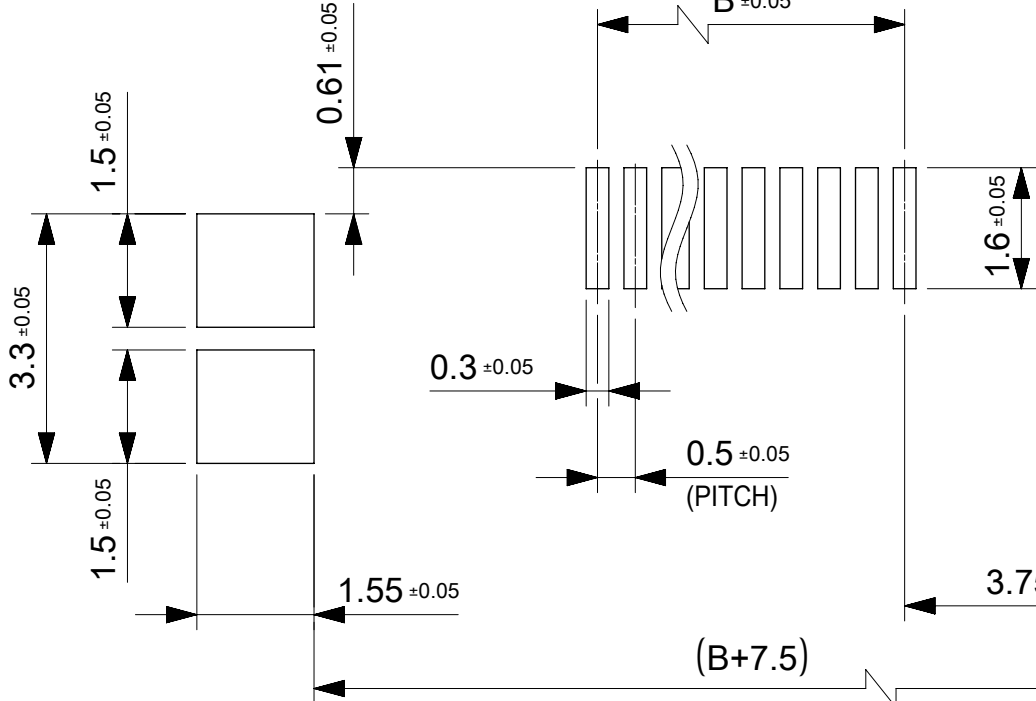


推奨PWB寸法
RECOMMENDED PWB DIMENSION


推奨メタルマスク厚、開口率: t=0.12mm, 80%
RECOMMENDED METAL MASK THICKNESS, APERTURE RATIO: t=0.12mm, 80%
ロックネイル部開口率は100%
APERTURE RATIO FOR LOCK NAIL: 100%

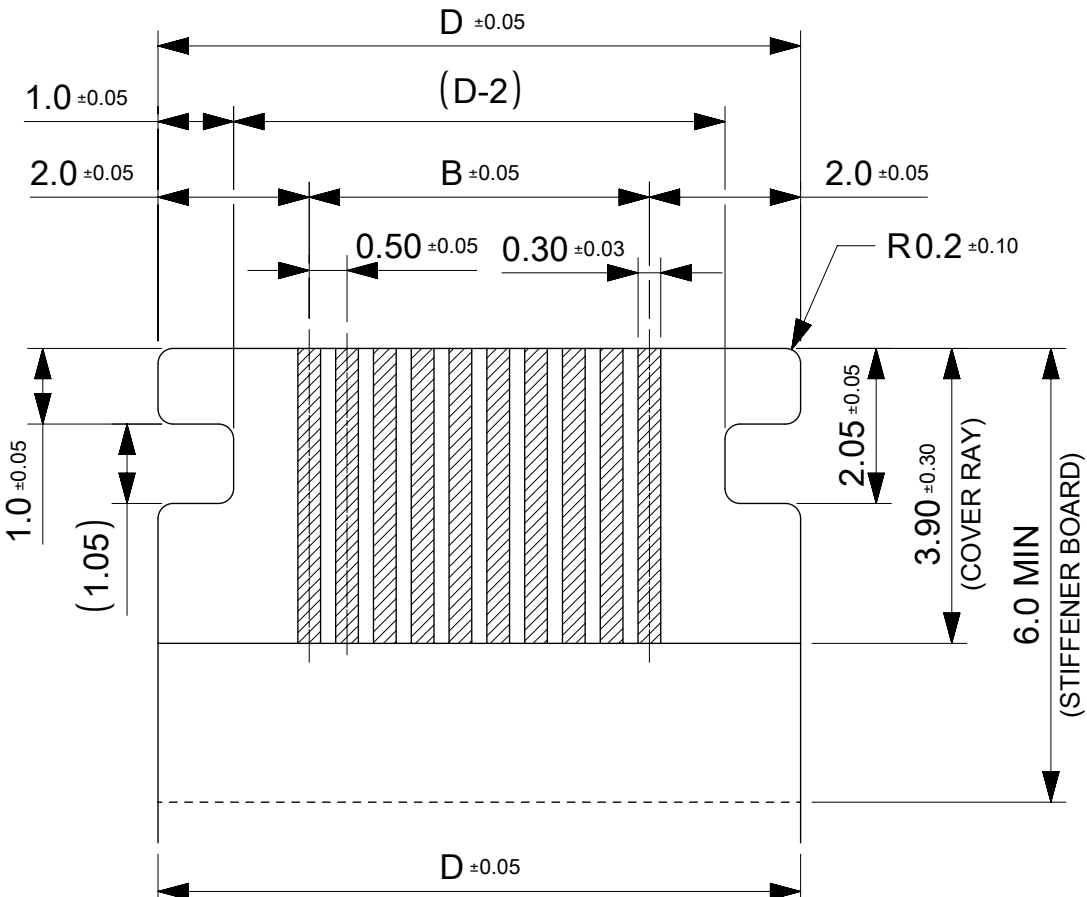

推奨FFC寸法
RECOMMENDED FFC DIMENSION

抜き方向は導体側から補強版側を推奨します
RECOMMENDED PUNCHING DIRECTION:
FROM CONDUCTOR SIDE TO STIFFENER SIDE

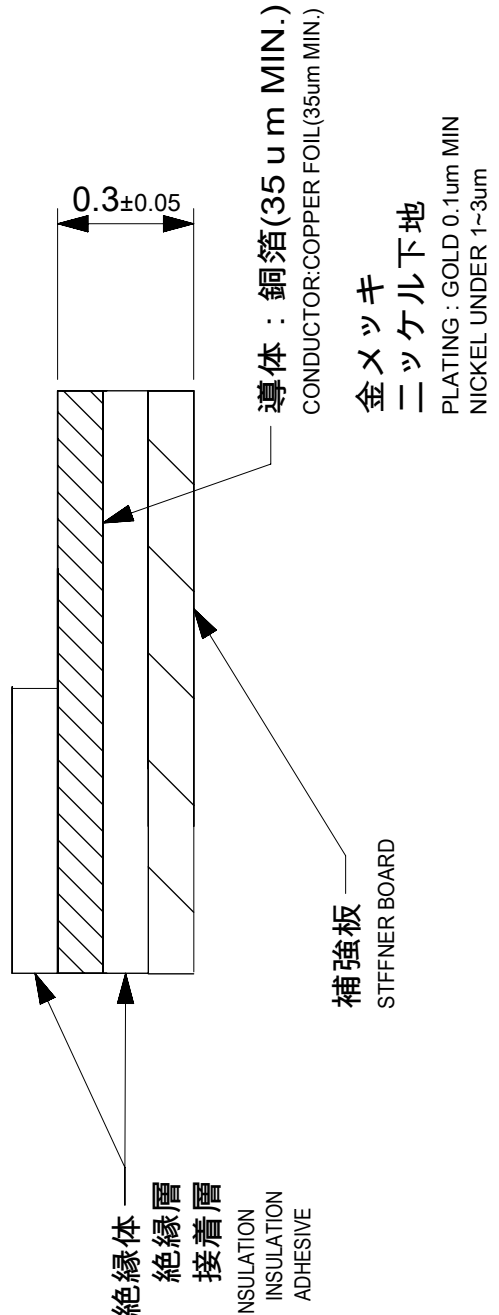

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
DIMENSION UNITS		SCALE		CURRENT REV DESC:									
mm		10:1											
GENERAL TOLERANCES (UNLESS SPECIFIED)				molex									
ANGULAR TOL ± 1.0 °													
4 PLACES ± 0.1				0.5FFC CONN. ST ONE TOUCH ASSY									
3 PLACES ± 0.1													
2 PLACES ± 0.1				PRODUCT CUSTOMER DRAWING									
1 PLACE ± 0.1													
0 PLACES ± 0.1				DOCUMENT NUMBER				DOC TYPE		DOC PART		REVISION	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				2004851500				PSD		000		G	
THIRD ANGLE PROJECTION				DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
				A3-SIZE		200485		SEE TABLE		GENERAL		2 OF 2	