

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.



COPYRIGHT

-

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD




D

REVISED AS PER ECN-22-176158




26JUL2022

HS

SZ

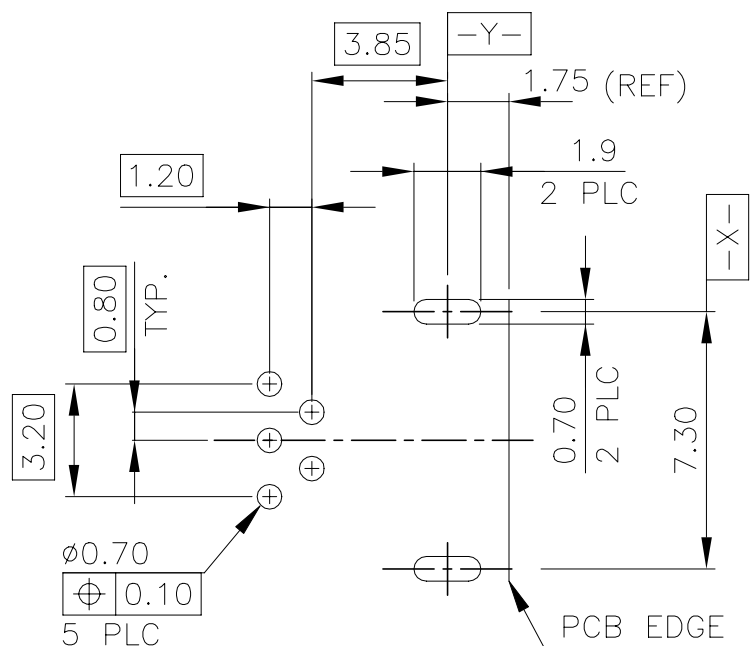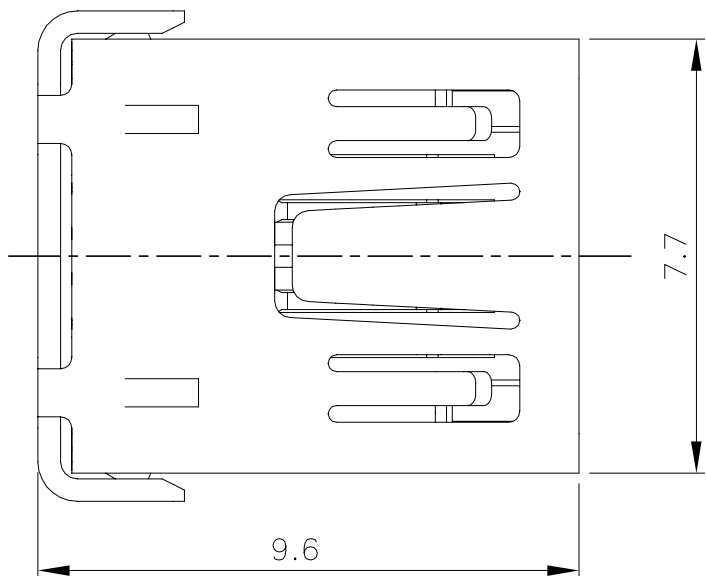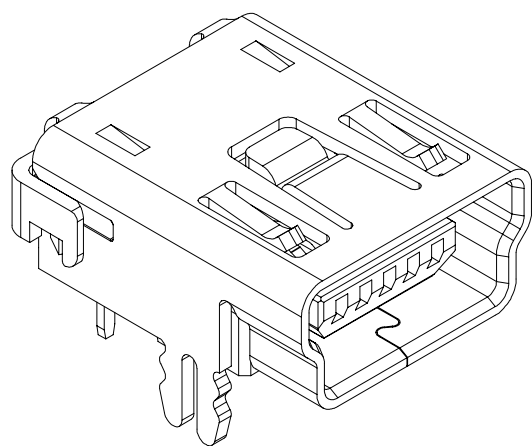

RECOMMENDED PCB LAYOUT (THICKNESS: 1.6MM)
(DIMENSION TOLERANCE: 1 PLC: ±0.1 2PLC: ±0.05)

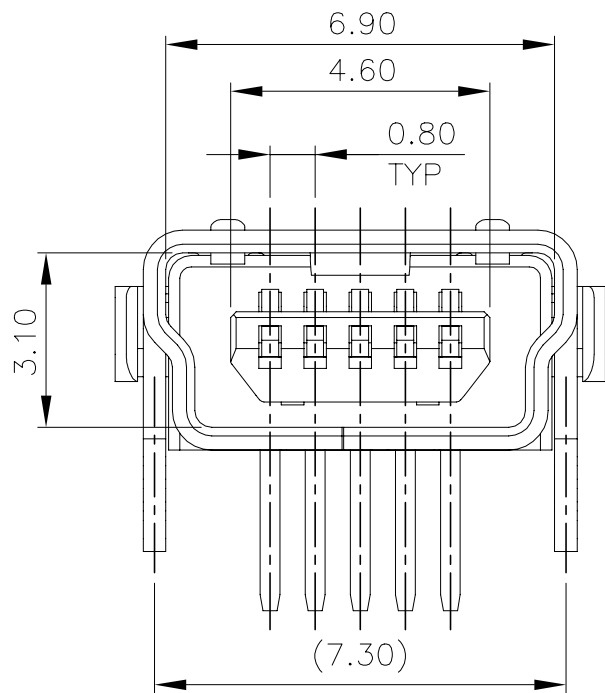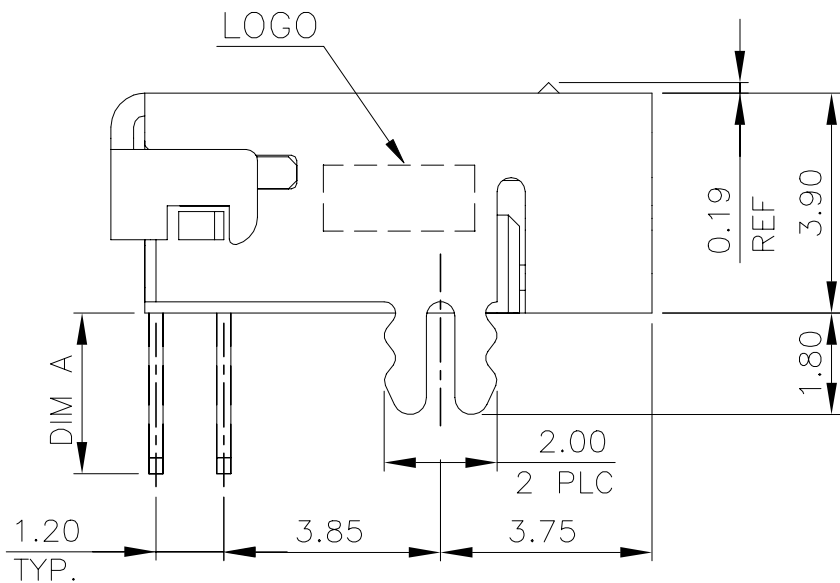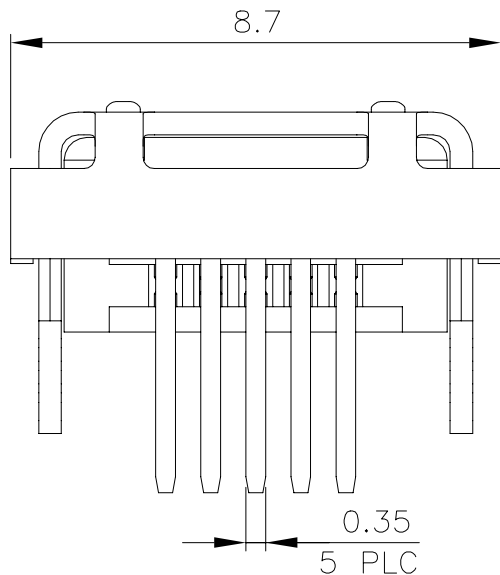

3.25		PBT	1-1734510-1
2.55		PBT	1734510-3
2.85		PA9T	1734510-2
2.85		PBT	1734510-1
DIM A	SOLERING PROCESS	HOUSING MATERIAL	PART NUMBER

NOTE:

1. MATERIAL:

HOUSING: (SEE TABLE) WITH 30% GF, UL 94V-0, COLOR BLACK.

CONTACT: PHOSPHOR BRONZE, THICKNESS: 0.25mm.

SHIELD: PHOSPHOR BRONZE, THICKNESS: 0.40mm.

2. FINISH:

CONTACT: GOLD FLASH OVER 0.762um [30u"] MIN. PALLADIUM-NICKEL OR

ALTERNATIVE 0.762um [30u"] MIN. GOLD PLATED ON CONTACT AREA,

2.54um [100u"] MIN. MATTE TIN PLATED ON SOLDERTAILS,

1.27um [50u"] MIN. NICKEL UNDERPLATED ALL OVER.

SHIELD: 0.762um [30u"] MIN. MATTE TIN OVER 1.27um [50u"] MIN. Ni.

UNDERPLATED ALL OVER.



WAVE SOLDER CAPABLE TO 240°C. PER TE SPEC 109-202, CONDITION A.



WAVE SOLDER CAPABLE TO 265°C PER TE SPEC 109-202, CONDITION B.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

20JAN2009

S. CHIEN

CHK

20JAN2009

S. CHIEN

APVD

20JAN2009

W. KODAMA

PRODUCT SPEC

108-57062

QUALIFICATION TEST REPORT

501-57070


WEIGHT

0.62 GRAMS

CUSTOMER DRAWING

DIMENSIONS:

MM



MATERIAL

SEE NOTE

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± 0.5
1 PLC	± 0.35
2 PLC	± 0.25
3 PLC	± 0.15
4 PLC	± -
ANGLES	± 3°

FINISH

SEE NOTE



TE Connectivity

NAME

MINI USB CONN., RCPT R/A, DIP, B TYPE

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779

C=1734510

SCALE

SHEET

1 OF 2

REV

D


4


3

2

1

LOC	DIST	REVISIONS				
DW		P	LTR	DESCRIPTION	DATE	APVD
				SEE SHEET 1.		

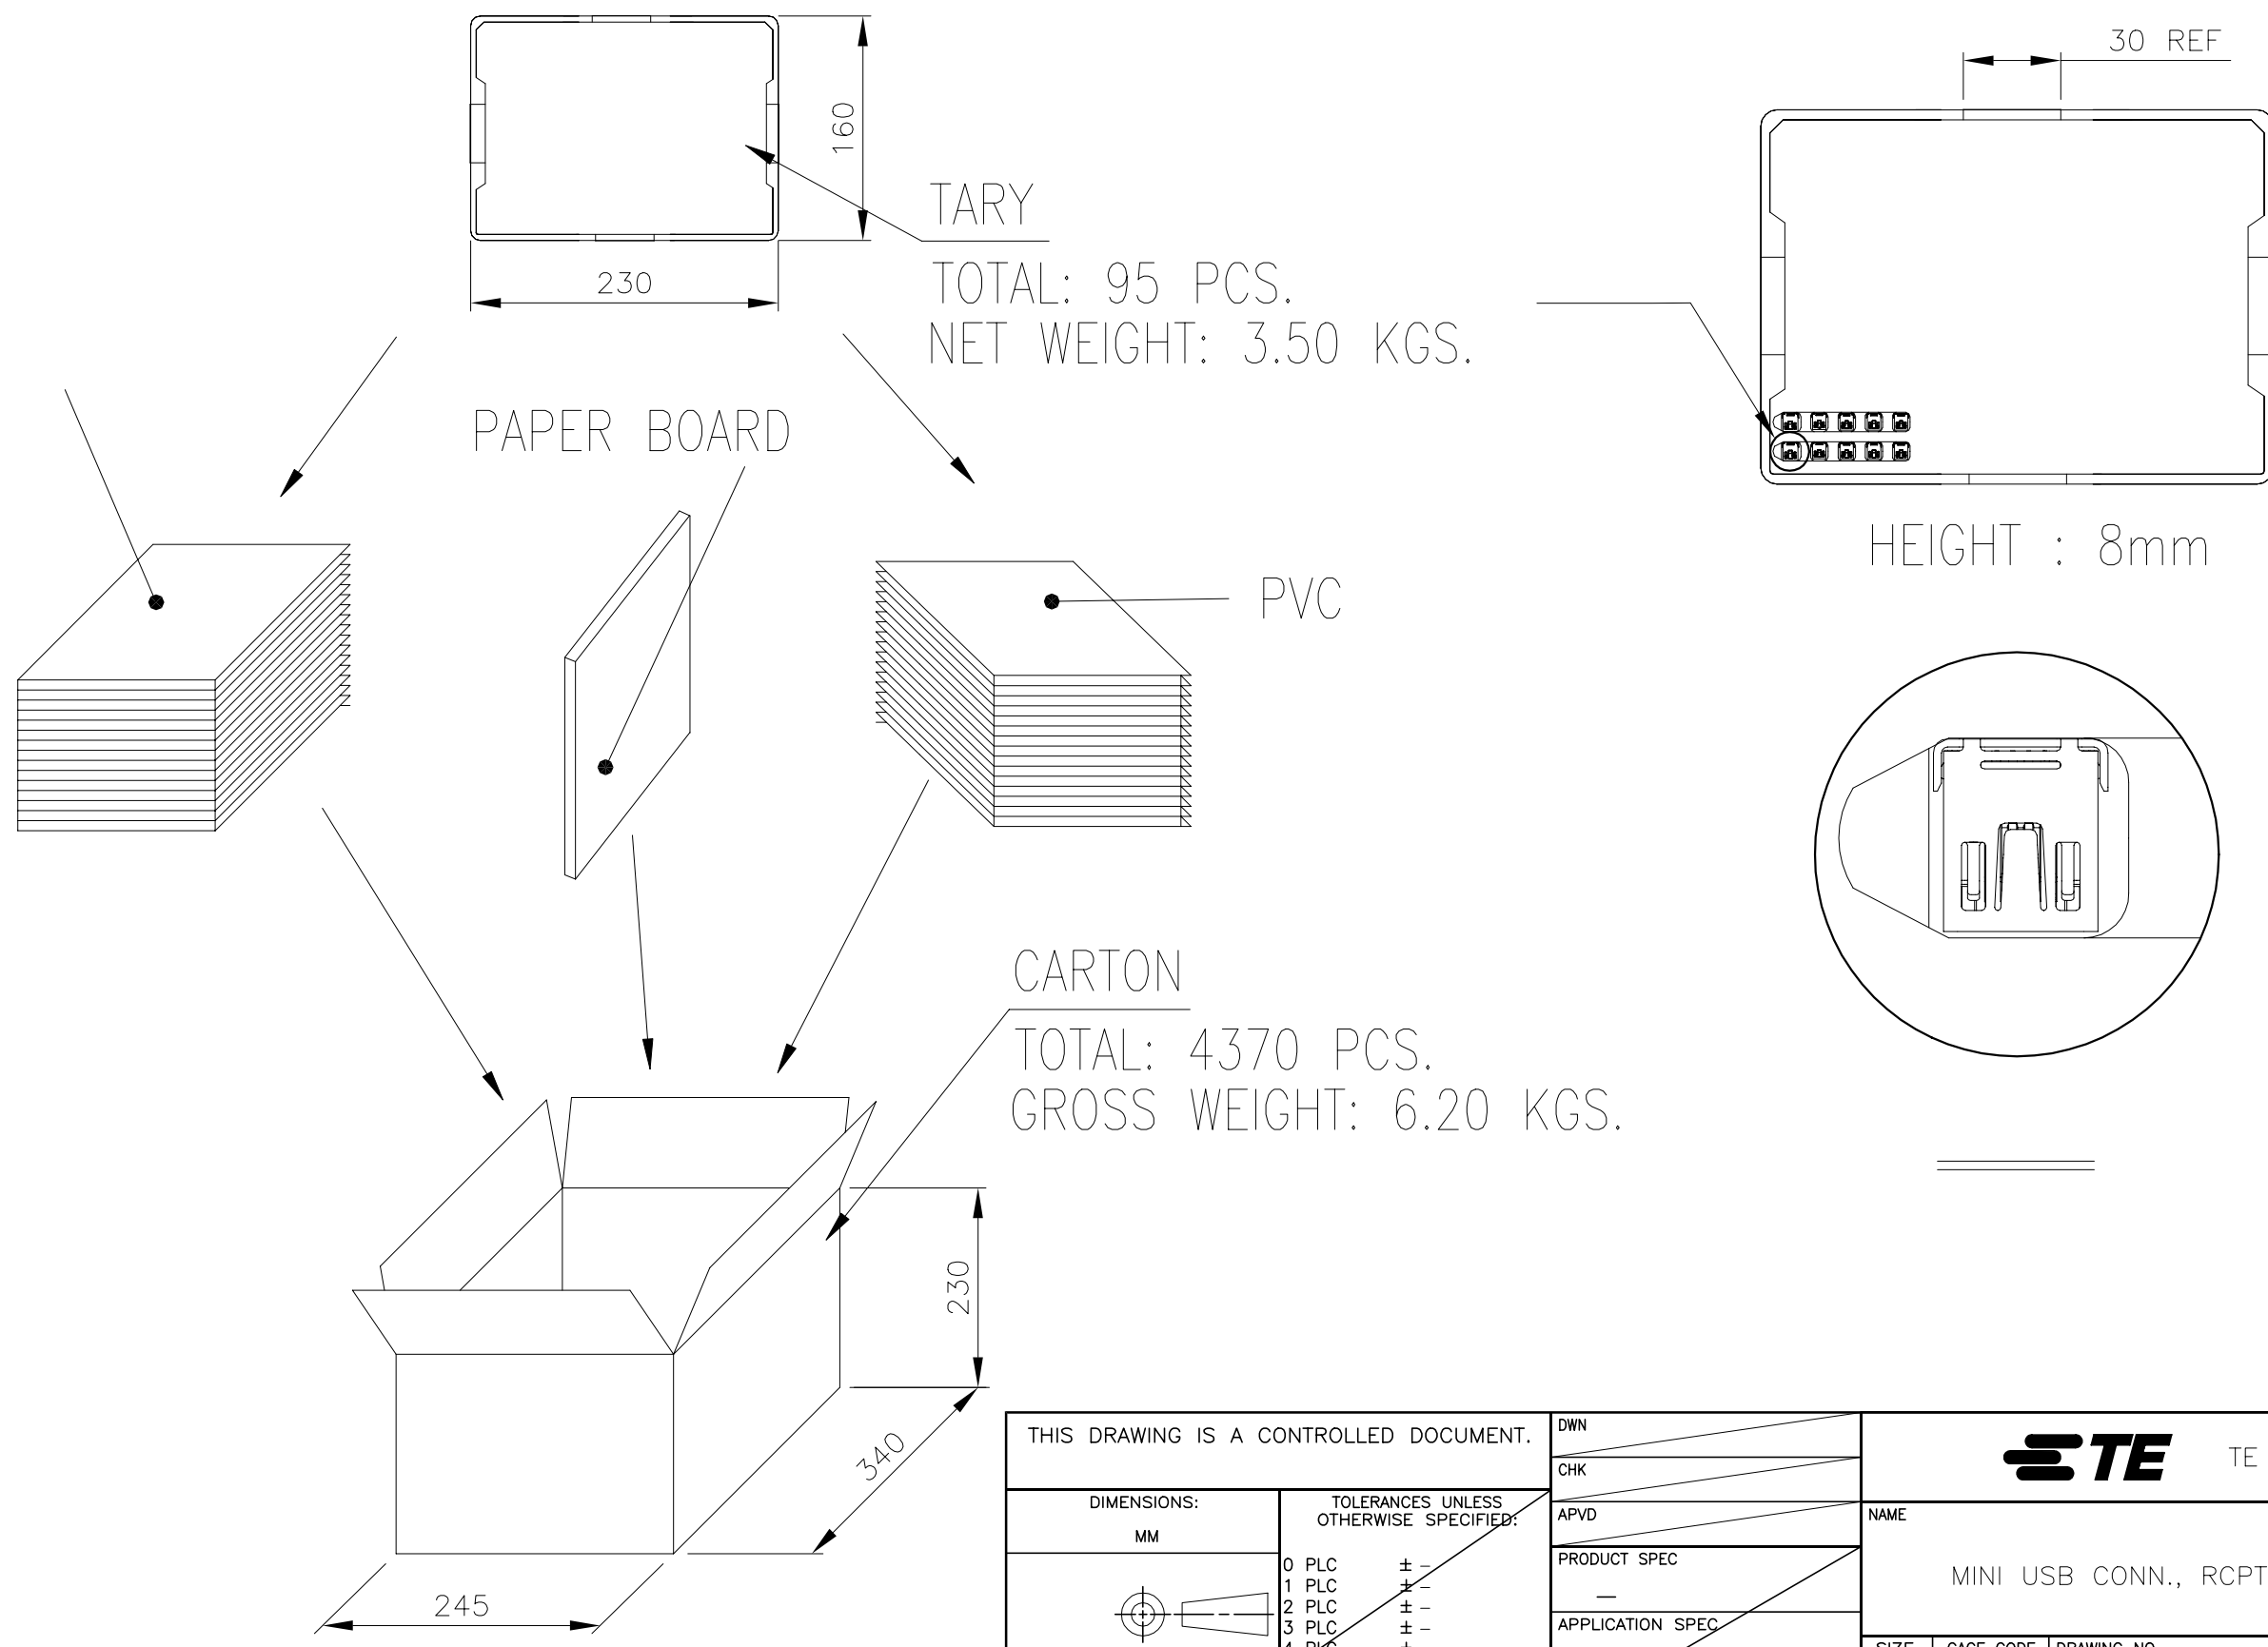

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN		TE Connectivity			
DIMENSIONS: MM		CHK					
		APVD		NAME MINI USB CONN., RCPT R/A, DIP, B TYPE			
		PRODUCT SPEC —					
		APPLICATION SPEC —					
		WEIGHT —					
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± — 4 PLC ± — ANGLES ± —		SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO	
MATERIAL —		FINISH —		A300779		C=1734510	—
CUSTOMER DRAWING				SCALE	SHEET	2 OF 2	REV
				—		D	