




Part Number : [2086593240](#)
Product Description : 2.00mm Pitch, iGrid PCB Header, Dual Row, Right-Angle, Through Hole, 0.10µm Gold (Au) Plating, Positive Lock, 32 Circuits, Tray, 3.20mm PC Tail Length, Natural
Series Number : 208659
Status : Active
Product Category : PCB Headers and Receptacles

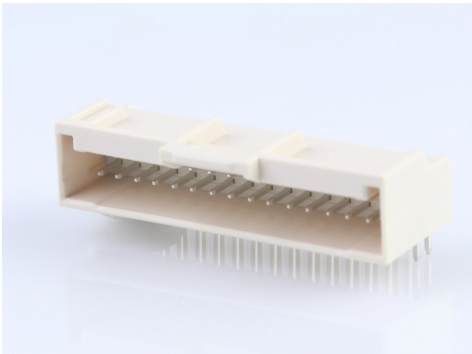

Documents & Resources

Drawings
[2086593240_sd.pdf](#)

3D Models and Design Files
[2086593240.dxf](#)
[2086593240.pdf](#)
[2086593240_stp.zip](#)

Specifications
[2086599200-SPK-200.pdf](#)
[5016460000-PS-000.pdf](#)
[5016461000-PS-000.pdf](#)

Product Environment Compliance

Compliance

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Not Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2024)4144-DC (27 June 2024)
EU RoHS	Compliant per EU 2015/863

Multiple Part Product Compliance Statements
- Eu RoHS
- REACH SVHC

- Low-Halogen

Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

EU RoHS Certificate of Compliance

Part Details

General

Status	Active
Category	PCB Headers and Receptacles
Series	208659
Description	2.00mm Pitch, iGrid PCB Header, Dual Row, Right-Angle, Through Hole, 0.10µm Gold (Au) Plating, Positive Lock, 32 Circuits, Tray, 3.20mm PC Tail Length, Natural
Application	Signal, Wire-to-Board
Component Type	PCB Header
Product Name	iGrid
UPC	193264111879

Agency

CSA	LR19980
UL	E29179

Electrical

Current - Maximum per Contact	2.0A
Voltage - Maximum	250V AC (RMS)/DC

Physical

Breakaway	No
Circuits (Loaded)	32
Circuits (maximum)	32
Color - Resin	Natural

Durability (mating cycles max)	30
First Mate / Last Break	No
Glow-Wire Capable	No
Keying to Mating Part	Yes
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Gold
Material - Resin	Polyamide
Number of Rows	2
Orientation	Right Angle
Packaging Type	Tray
PC Tail Length	3.20mm
PCB Locator	Yes
PCB Retention	None
PCB Thickness - Recommended	1.20mm, 1.60mm
Pitch - Mating Interface	2.00mm
Plating min - Mating	0.102µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Stackable	No
Temperature Range - Operating	-40° to +105°C
Termination Interface Style	Through Hole

Mates With / Use With

Mates with Part(s)

Description	Part Number
iGrid Dual Row Receptacle Housings	<u>501646</u>